



Test report is for reference only.


TEST REPORT
For
JXWBLB-T-BP-900-100-LS



Technical Specification

Frequency Range (MHz)	850-950
Insertion Loss at Center Frequency (dB)	2.4 max
VSWR	1.5 max
Center Frequency (MHz)	900
1dB Bandwidth (MHz)	100 min
Rejection(dB @ MHz)	40 min @ 800 40 min @ 1000
Impedance (Ohm)	50
Connectors	SMA-Female
Size(mm)	40.4X9.5X9.5
Operating Temperature(°C)	-40 ~ +80
Storage Temperature(°C)	-55 ~ +85
Net Weight(Kg)	0.015 Around

Outline Drawing (Size: mm)

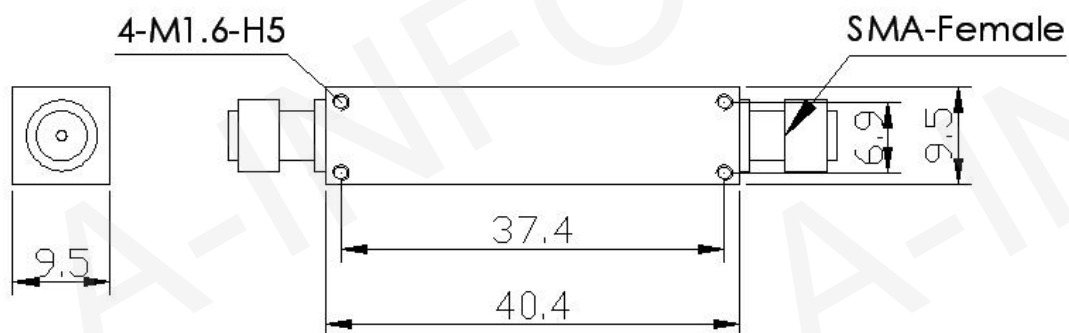

Test Results

Temperature	F0(MHz)	Lr0(dB)	-1dB BW	Rejection(dB)		VSWR
				800MHz	1000MHz	
Low Temperature	900	-1.70	104.12	-46.0	-39.9	1.44
High Temperature	900	-1.79	102.63	-46.1	-40.0	1.45
Normal Temperature	900	-1.74	103.50	-46.1	-40.0	1.45