



Test report is for reference only.


**TEST REPORT**  
**For**  
**JXWBGF-T-2-10-1000**



**Technical Specification**

Frequency Range(MHz)	10-1000	
Insertion Loss(dB)	L (typ/max)	0.2/0.5
	M (typ/max)	0.5/0.8
	U (typ/max)	0.8/1.0
Isolation(dB)	L (typ/min)	25/20
	M (typ/min)	25/20
	U (typ/min)	20/11
Amplitude Balance(dB)	0.3 max	
Phase Balance(°)	4 max	
Connector	BNC-Female	
Size(mm)	32x32x22	


**Outline Drawing (Size: mm)**

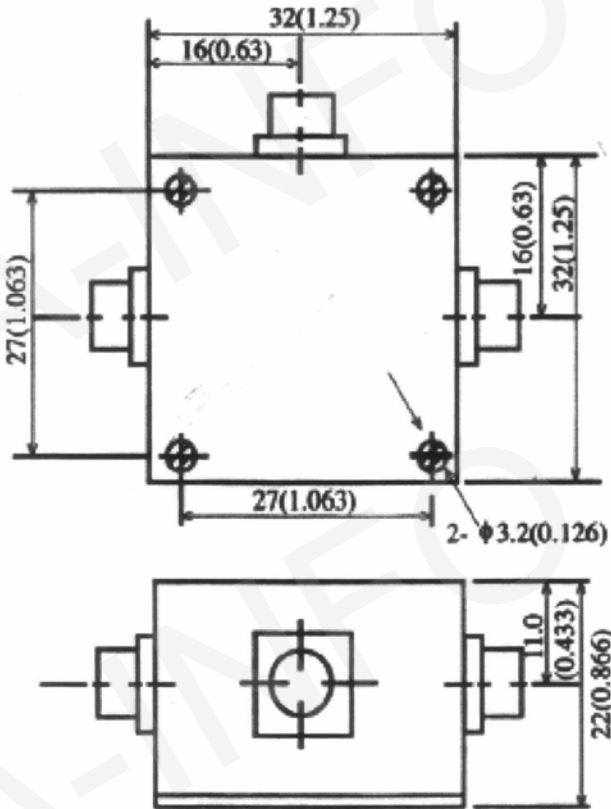

## Test Result

### Insertion Loss, VSWR & Phase Balance

2/22/2008, 2:05 PM

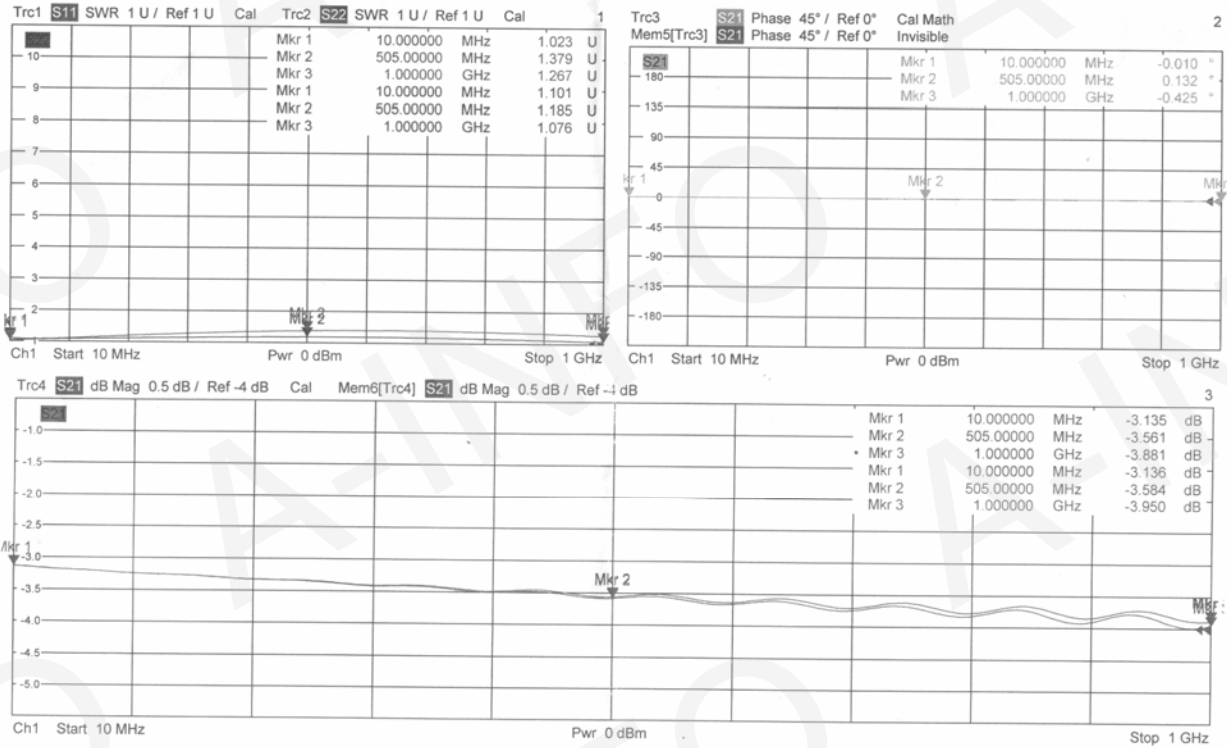

### Isolation

2/22/2008, 2:06 PM

Trc4 S21 dB Mag 10 dB / Ref -20 dB Cal 3 of 3 (Max)  
Mem6[Trc4] S21 dB Mag 10 dB / Ref -20 dB Invisible

