



Test report is for reference only.


**TEST REPORT**  
for  
**JXWBGF-T-2-3700-4800**



## Technical Specification

<b>Frequency Range( MHz)</b>	3700~4800
<b>Insertion Loss(dB)</b>	0.6 max
<b>Isolation(dB)</b>	10 min
<b>VSWR</b>	1.30:1 max
<b>Amplitude Balance(dB)</b>	0.5 max
<b>Phase Balance(°)</b>	5 max
<b>Impedance(Ohms)</b>	50
<b>Power Handling(W)</b>	20 CW (output VSWR<1.5)
<b>Connectors</b>	N-Female
<b>Operating Temperature(°C)</b>	-30~+55
<b>Net Weight</b>	0.165 Around

## Outline Drawing (Size: mm)

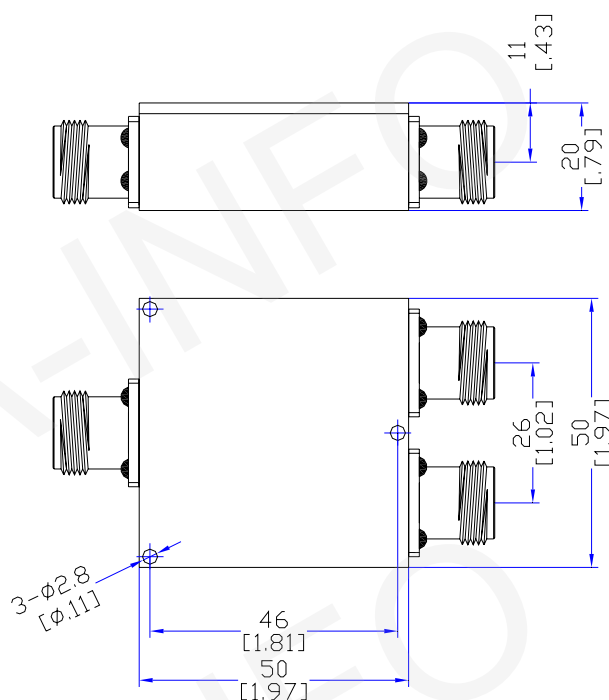

## Test Results

Insertion Loss 0.6dB max	VSWR 1.30 max	Isolation 10dB min	Amplitude Balance 0.5dB max	Phase Balance 5° max
0.32	1.18	19.5	0.12	0.56