




Test report is for reference only.

TEST REPORT
for
JXWBGF-T-2-5-500-B15

Technical Specification


Frequency Range(MHz)	5-500
Insertion Loss(dB)	L: 0.2/0.5 Typ/Max
	M: 0.3/0.6 Typ/Max
	U: 0.6/0.8 Typ/Max
Isolation(dB)	L: 35/25 Typ/ Min
	M: 28/20 Typ/Min
	U: 25/20 Typ/Min
Phase Unbalance(°)	4 max
Amplitude Unbalance(dB)	0.3 max
Connector	BNC-Female
Operating Temperature(°C)	-40 ~ +80
Storage Temperature(°C)	-55 ~ +85

Outline Drawing (Size: mm)

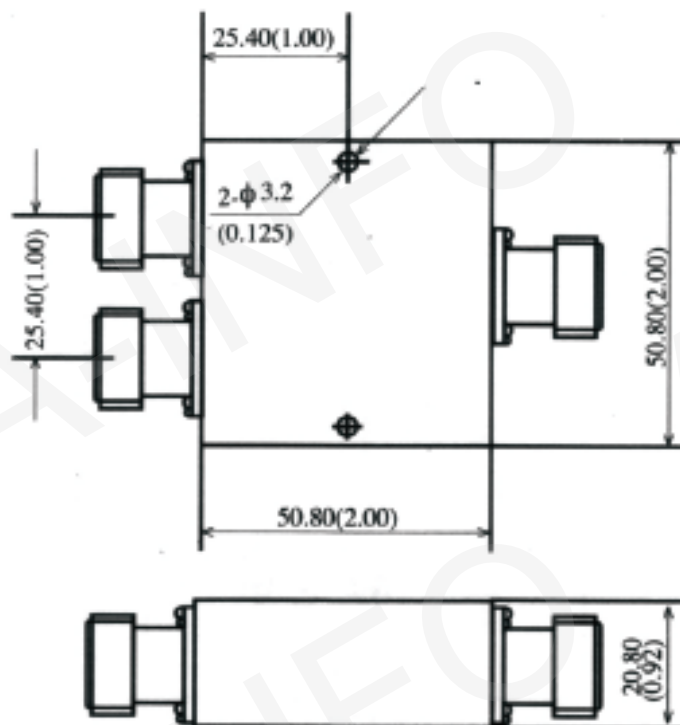


Test Results


1. Insertion Loss

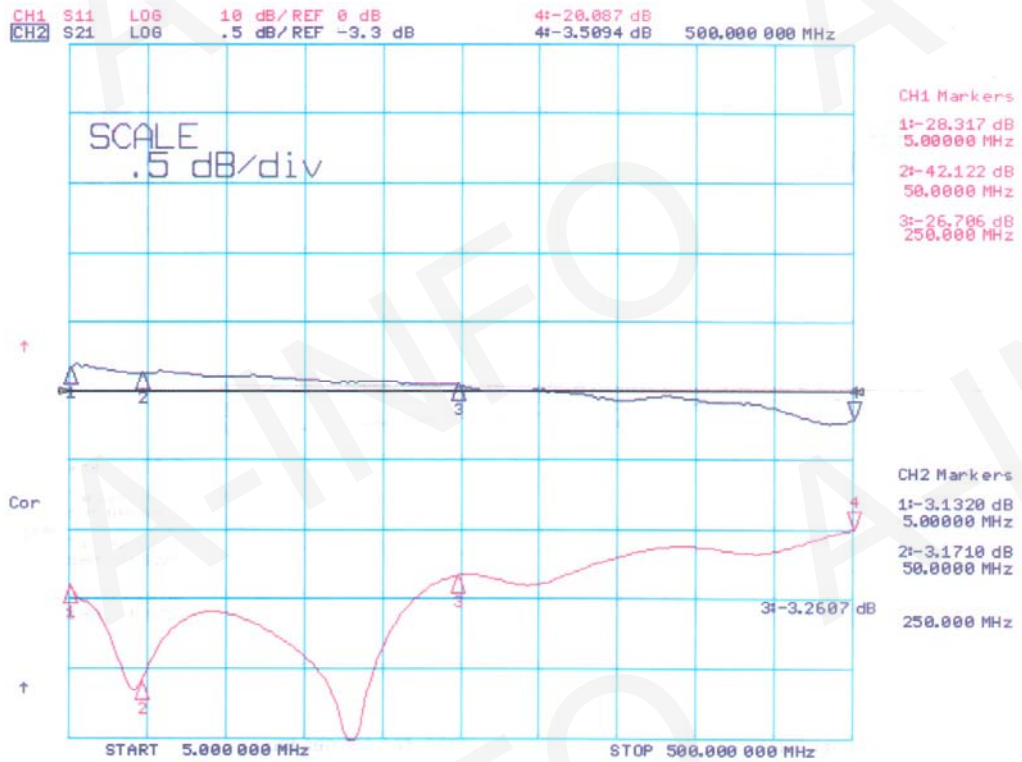

2. Isolation

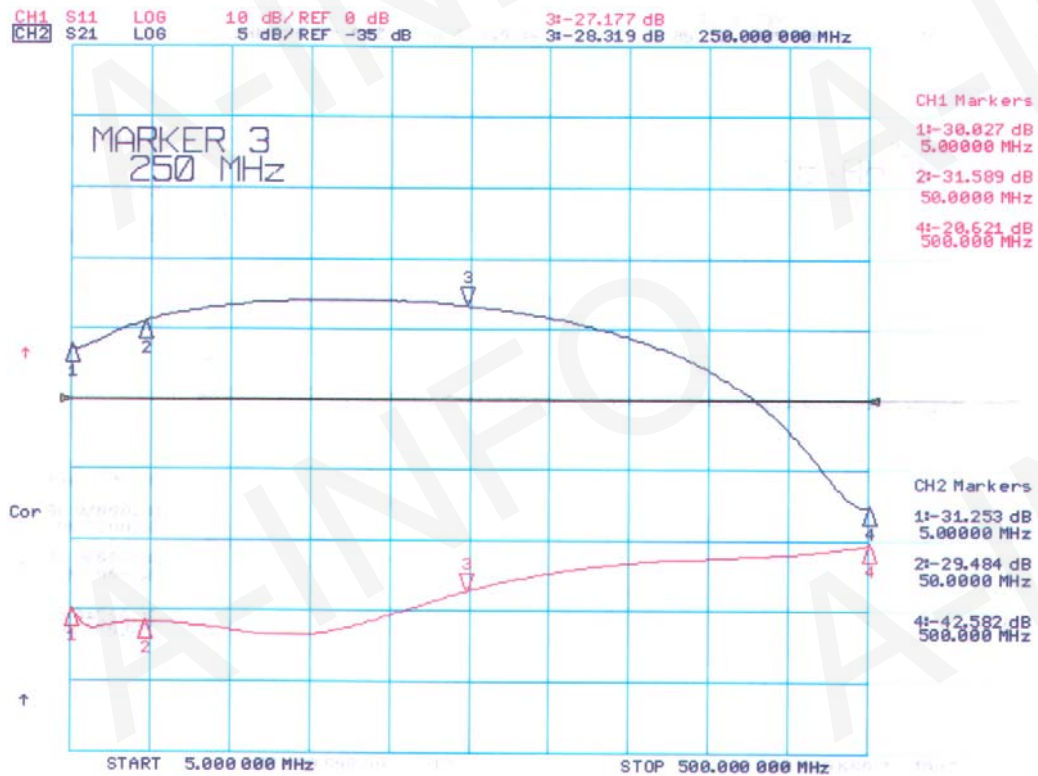

3. Phase Unbalance

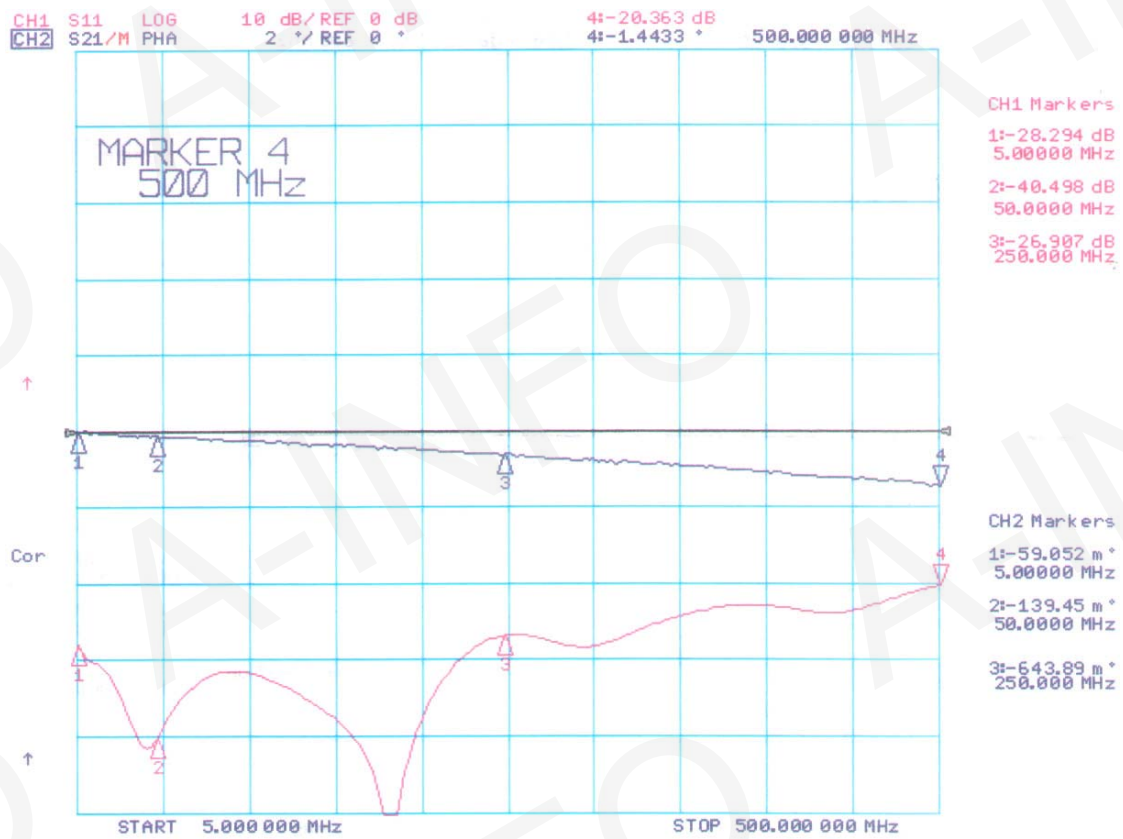

4. Amplitude Unbalance

