


Outline Drawing (Size: mm)

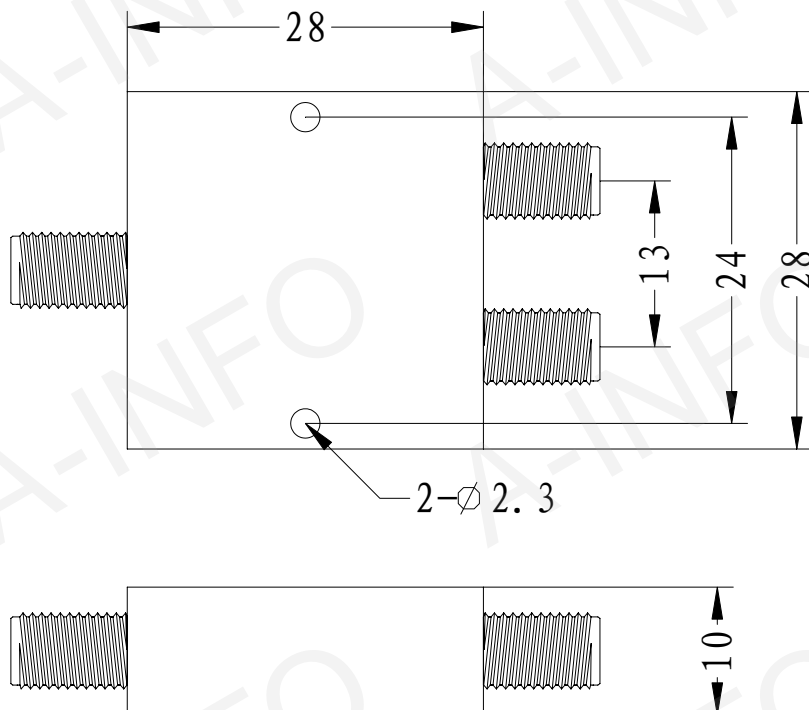

Test Results Table

Item	Technical Specification	Test Results
Frequency Range(GHz)	7.9-8.6	7.9-8.6
Insertion Loss(dB)	0.4 max	0.31 max
Isolation(dB)	22 min	22.9 min
Amplitude Balance(dB)	±0.2 max	±0.10 max
Phase Balance(°)	±3 max	±1.3 max
Power Forward(W)	10	10
Power Reverse(W)	2	2
VSWR	1.20 max	1.15 max
Impedance(Ohms)	50	50
Connectors	SMA-Female	SMA-Female
Operating Temperature(°C)	-40 ~ +70	-40 ~ +70