


Outline Drawing (Size: mm)

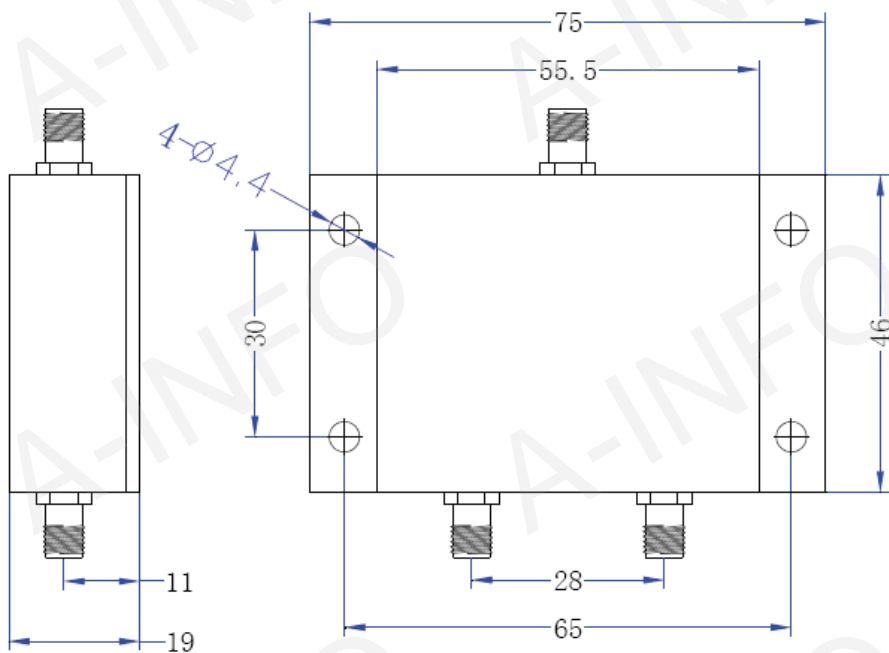

Tolerance: ± 0.3

Test Result Table

| Item | Technical Specification | Test Results |
|--------------------------------------|-------------------------|--------------|
| Frequency Range(GHz) | 0.8-1.0 | 0.8-1.0 |
| Insertion Loss(dB) | 0.4 max | 0.26 max |
| Isolation(dB) | 22 min | 24.8 min |
| Amplitude Balance(dB) | 0.2 max | 0.05 max |
| Power Forward(W) | 20 | 20 |
| Power Reverse(W) | 3 | 3 |
| VSWR | 1.25 max | 1.15 max |
| Connectors | SMA-Female | SMA-Female |
| Operating Temperature($^{\circ}$ C) | -25 ~ +65 | -25 ~ +65 |