



Test report is for reference only.


TEST REPORT
For
JXWBGF-T-2-800-6000



Technical Specification

Frequency Range(GHz)	0.8 – 6
Insertion Loss(dB)	0.9 max
Isolation(dB)	18 min
Input VSWR	1.4:1 max
Output VSWR	1.3:1 max
Amplitude Balance(dB)	±0.2 max
Phase Balance(°)	±3 max
Impedance(ohms)	50
Forward Power(W)	20
Reverse Power(W)	2
Connectors	SMA-Female
Operating Temperature(°C)	-40 ~ +70
Net Weight(Kg)	0.08 Around

Outline Drawing (Size: mm)

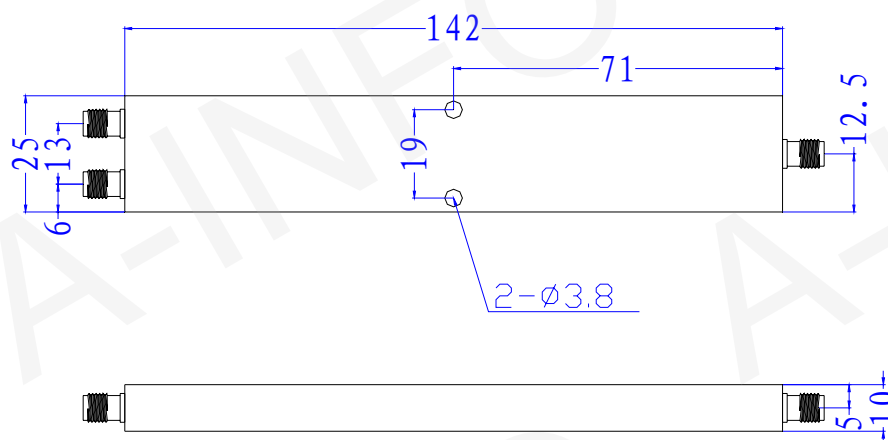

Test Results

Insertion Loss (dB)	Isolation (dB) min	VSWR Input	VSWR Output	Phase Unbalance (°)	Amplitude Unbalance (dB)
0.85	20	1.32	1.26	±2	±0.10