



Test report is for reference only.


**TEST REPORT**  
**For**  
**JXWBGF-T-4-1000-2000-50\_N**



## Technical Specification

Frequency Range( GHz)	1 – 2
Insertion Loss( dB)	0.7 max
Input VSWR	1.30:1 max
Output VSWR	1.25:1 max
Isolation (dB )	20 min
Amplitude Balance( dB)	±0.35 max
Phase Balance( °)	±5 max
Impedance (Ohms )	50
Forward Power( W)	50
Reverse Power( W)	5
Connectors	N-Female
Temperature Range( °C)	-30 ~ +70
Net Weight(Kg)	0.35 Around

## Outline Drawing (Size: mm)

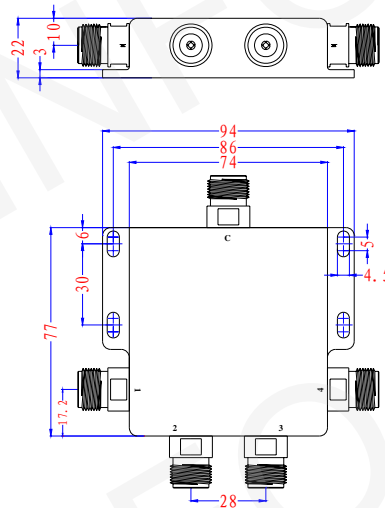

## Test Results

Insertion Loss (dB)	Isolation (dB)	VSWR (Input)	VSWR (Output)	Amplitude Unbalance (dB)
0.45	23	1.23	1.12	±0.22