



Test report is for reference only.


TEST REPORT
for
JXWBGF-T-4-450-890



Technical Specification

Frequency Range(MHz)	450-890
Insertion Loss(dB)	1.0 max
Isolation(dB)	20 min
VSWR	1.3 : 1 max
Amplitude Balance(dB)	0.5 max
Phase Balance(°)	6 max
Impedance(Ohms)	50
Power Handling(W)	50
Connectors	N-Female
Operating Temperature(°C)	-40 ~ +70

Outline Drawing (Size: mm)

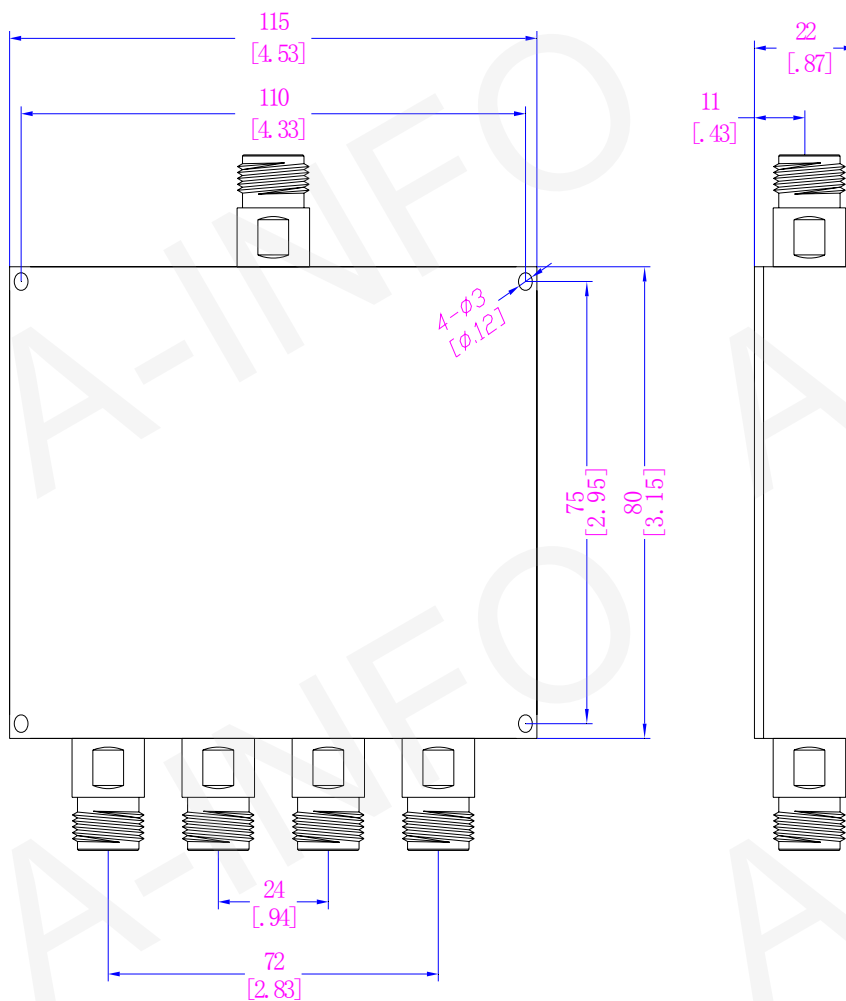

Test Results (Frequency Range: 450~900MHz)

S/N	Insertion Loss(dB) 1.0dB max	VSWR 1.3 max	Isolation(dB) 20dB min	Amplitude 0.5dB max
J0855070428086	0.48	1.18	21.5	0.09
J0855070428080	0.49	1.19	21.6	0.10
J0855070428083	0.51	1.20	21.8	0.15
J0855070428084	0.53	1.21	21.9	0.23
J0855070428092	0.61	1.27	22.1	0.37
J0855070428085	0.63	1.26	23.2	0.35
J0855070428082	0.64	1.25	22.8	0.37
J0855070428079	0.49	1.24	23.1	0.40
J0855070428091	0.65	1.28	23.2	0.40

Tester	QC	Date
003	008	2007-4-28