



Test report is for reference only.


TEST REPORT
For
JXWBGF-T-4-800-6000



Technical Specification

| | |
|----------------------------|-------------|
| Frequency Range(GHz) | 0.8 – 6 |
| Insertion Loss(dB) | 1.8 max |
| Isolation(dB) | 18 min |
| Amplitude Balance(dB) | ±0.3 max |
| Phase Balance(°) | ±4 max |
| Forward Power(W) | 10 |
| Reverse Power(W) | 2 max |
| Input VSWR | 1.5 max |
| Output VSWR | 1.4 max |
| Connectors | SMA-Female |
| Operating Temperature(°C) | -40 ~ +70 |
| Storage Temperature(°C) | -55 ~ +85 |
| Net Weight(Kg) | 0.13 Around |

Outline Drawing (Size: mm)

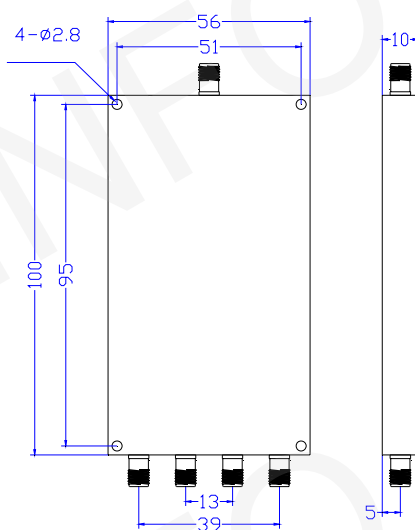

Test Results

| Insertion Loss (dB) | Isolation (dB) min | VSWR Input | VSWR Output | Phase Unbalance (°) | Amplitude Unbalance (dB) |
|---------------------|--------------------|------------|-------------|---------------------|--------------------------|
| 1.50 | 19 | 1.30 | 1.32 | ±3 | ±0.22 |