


Outline Drawing (Size: mm)

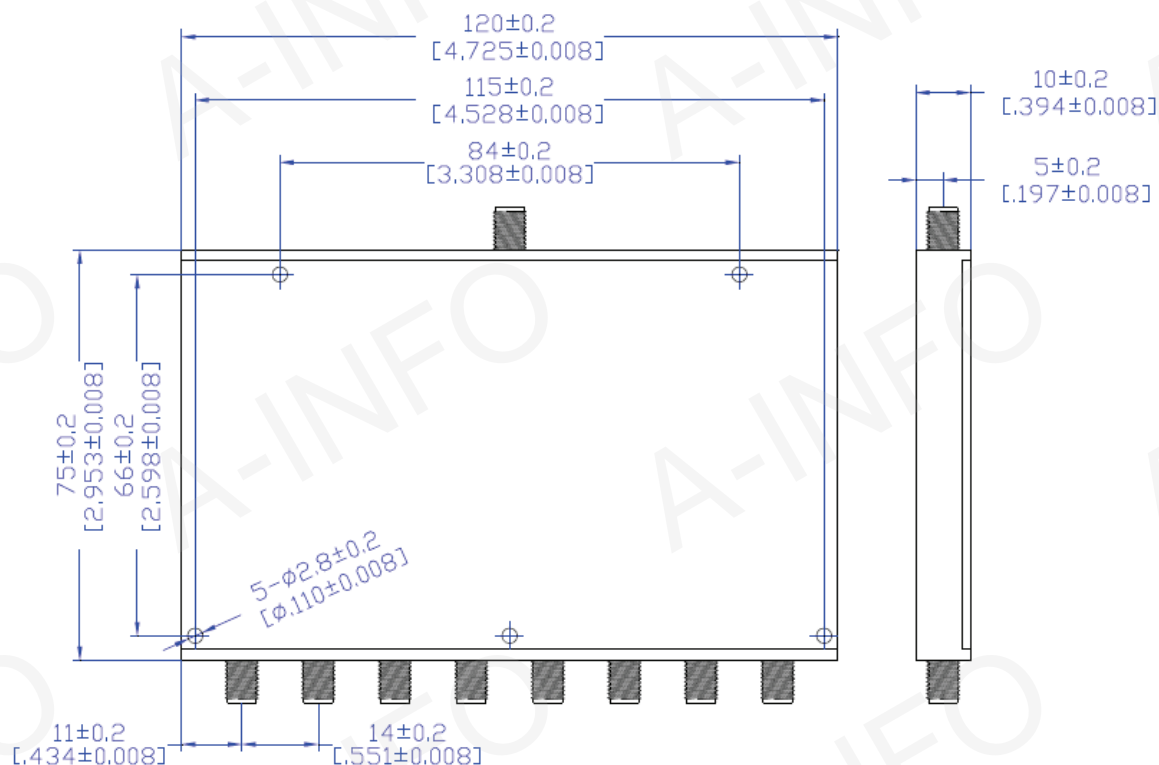

Test Result Table

Item	Technical Specification	Test Results
Frequency Range(GHz)	2 - 6	2-6
Insertion Loss(dB)	1.9 max	1.1 max
VSWR	1.45 max	1.41 max
Isolation(dB)	18 min	20 min
Amplitude Balance(dB)	±0.5 max	0.1 max
Phase Balance(°)	±8 max	±5.7 max
Power Forward(W)	10	10
Power Reverse(W)	2	2
Connectors	SMA-Female	SMA-Female
Operating Temperature(°C)	-40 ~ +70	-40 ~ +70
Storage Temperature(°C)	-55 ~ +85	-55 ~ +85