


## Outline Drawing (Size: mm)

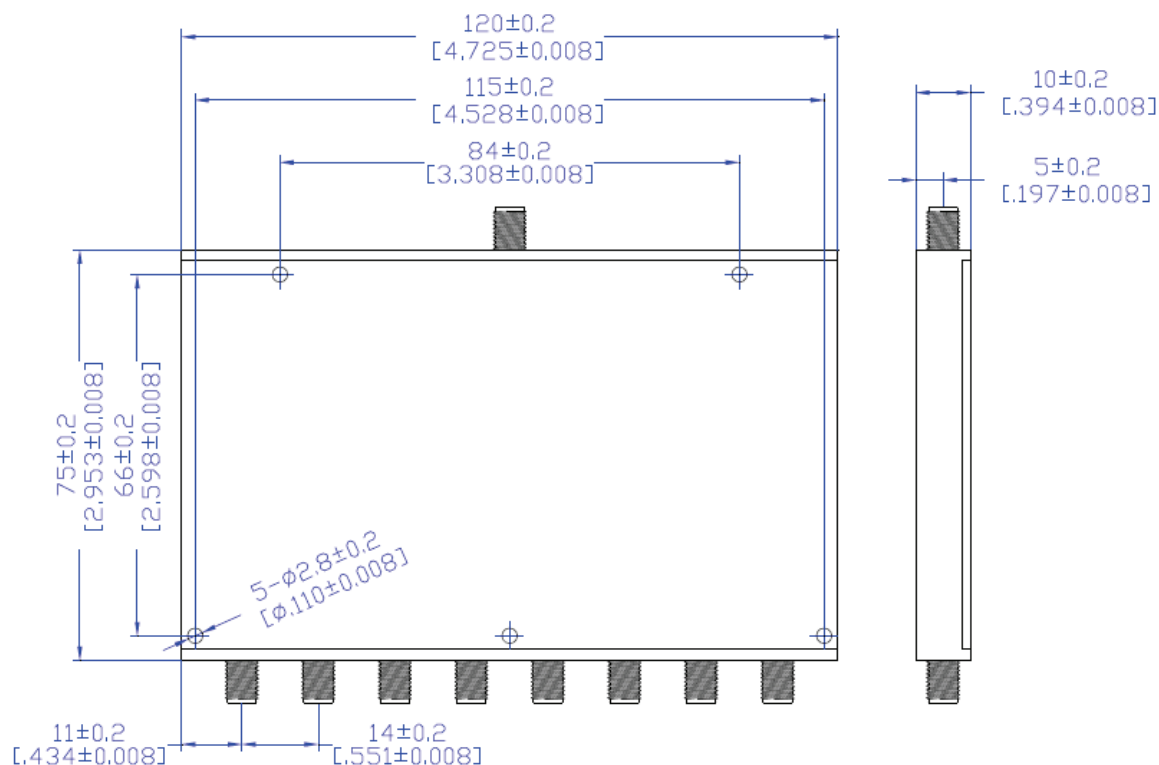

## Test Result Table

Item	Technical Specification	Test Results
Frequency Range(GHz)	2 - 6	2-6
Insertion Loss(dB)	1.9 max	1.1 max
VSWR	1.45 max	1.41 max
Isolation(dB)	18 min	20 min
Amplitude Balance(dB)	$\pm 0.5$ max	0.1 max
Phase Balance( $^{\circ}$ )	$\pm 8$ max	$\pm 5.7$ max
Power Forward(W)	10	10
Power Reverse(W)	2	2
Connectors	SMA-Female	SMA-Female
Operating Temperature( $^{\circ}$ C)	-40 ~ +70	-40 ~ +70
Storage Temperature( $^{\circ}$ C)	-55 ~ +85	-55 ~ +85