Test report is for reference only.

TEST REPORT

For

JXWBGF-T-8-400-3600

Technical Specification

Frequency Range(GHz)	0.4 – 3.6
Insertion Loss(dB)	3.0 max
Isolation(dB)	16 min
VSWR	1.6:1 max
Phase Unbalance(°)	±8 max
Amp. Unbalance(dB)	±0.5 max
Forward Power(W)	20 max
Reverse Power(W)	3 max
Connector	SMA-Female
Operation Temperature(°C)	-40 ~ +85
Net Weight(Kg)	0.33 Around

Outline Drawing (Size: mm)

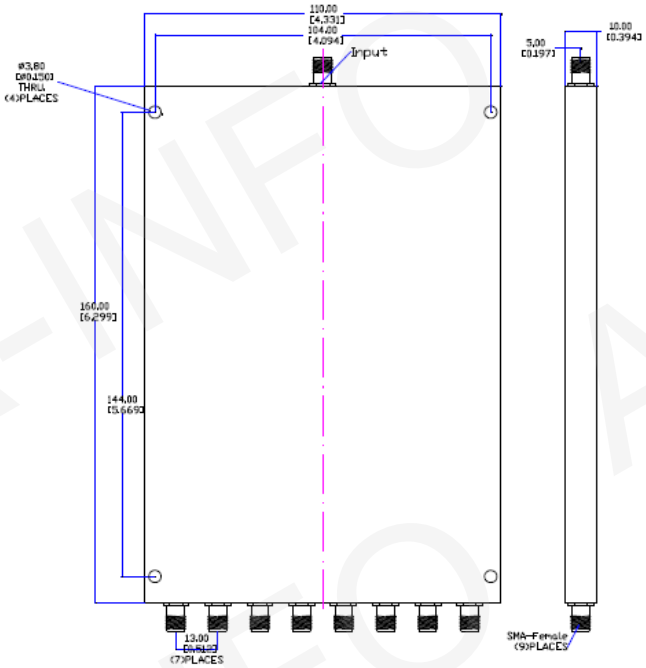

Test Results

Insertion Loss (dB)	Isolation (dB) min	VSWR	Phase Unbalance (º)	Amplitude Unbalance (dB)
2.30	19.8	1.48	±2.0	±0.20