



Test report is for reference only.


TEST REPORT
For
JXWBGF-T-8-6000-18000



Technical Specification

Frequency Range(GHz)	6-18
Isolation(dB)	18 min
Insertion Loss (dB)	2.2 max
Input VSWR	1.8 max
Output VSWR	1.6 max
Phase Unbalance(°)	±10 max
Amplitude Unbalance(dB)	±0.8 max
Forward Power(W)	20CW
Reverse Power(W)	2 CW
Impedance(ohm)	50
Connectors	SMA-Female
Operating Temperature(°C)	-40 ~+70°C
Net Weight(Kg)	0.16 Around

Outline Drawing (Size: mm)

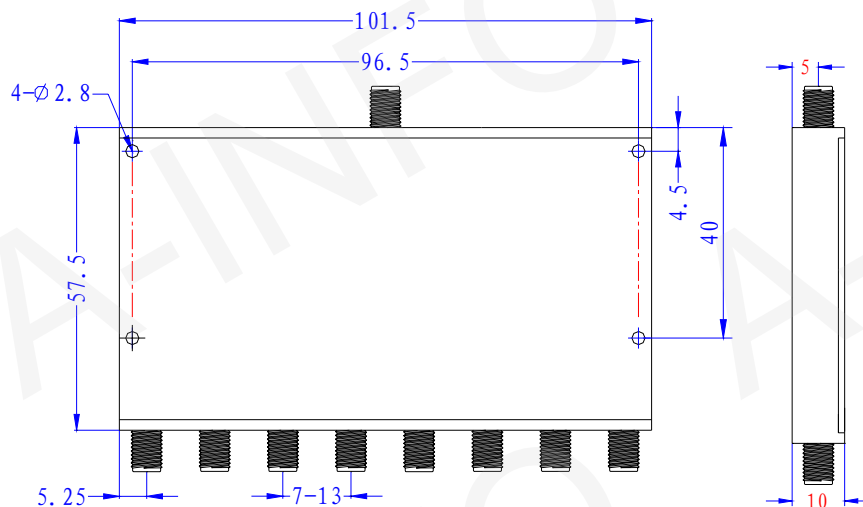

Test Results

Insertion Loss (dB)	Isolation (dB)	VSWR (Input)	VSWR (Output)	Phase Unbalance (°)	Amplitude Unbalance (dB)
1.75	19	1.58	1.36	±5	±0.52