



Test report is for reference only.


TEST REPORT
For
JXWBHC-T-4-800-2000



Technical Specification

Frequency Range(MHz)	800 -2000
Insertion Loss(dB)	0.8 max
VSWR	1.4:1 max
Isolation(dB)	20 min
Amplitude Balance(dB)	0.4 max
Phase Balance(°)	6 max
Impedance(Ohms)	50
Connectors	SMA-Female
Power Handling(W)	10 CW (output VSWR <1.5)
Operating Temperature(°C)	-55 ~ +85
Storage Temperature(°C)	-60 ~ +90
Relative Humidity	0~90%
Net Weight(Kg)	0.09 Around

Outline Drawing (Size: mm)

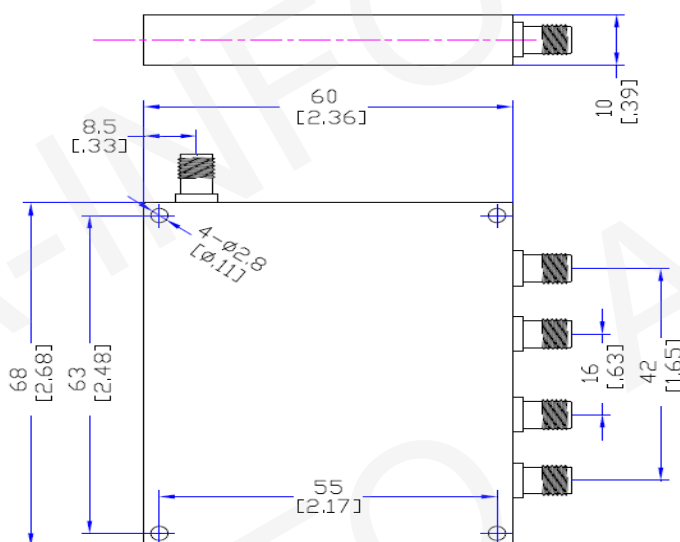

Test Results

Temperature	Insertion Loss (dB)	VSWR	Isolation (dB)	Amplitude Unbalance (dB)	Phase Unbalance (°)
Normal Temperature	0.47	1.20	22.3	0.05	1.20
Low Temperature	0.46	1.19	22.4	0.04	1.18
High Temperature	0.51	1.21	22.1	0.08	1.35