






For reference only. See data sheet for the detailed specifications.

Technical Specification

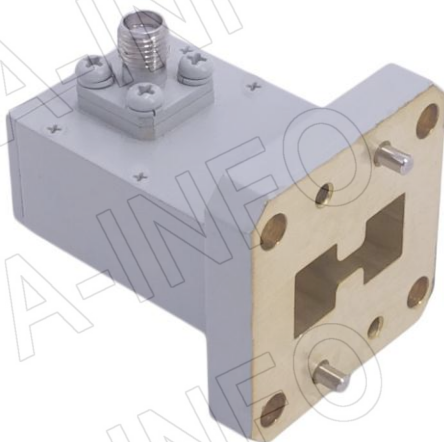

EIA WRD	WRD580
Frequency Range(GHz)	5.8 – 16.0
Insertion Loss(dB)	0.35 Max.
VSWR	1.30:1 Max.
Flange	FPWRD580D28
Connector	SMA-Female
Average Power(W CW)	50 Max.
Peak Power(KW)	1
Material	Cu
Size(mm)	42.7 x 35 x 36.9
Net Weight(Kg)	0.15 Around


Outline Drawing (Size: mm)

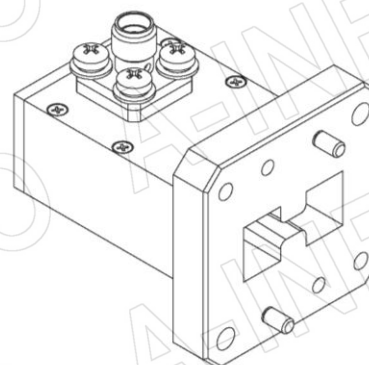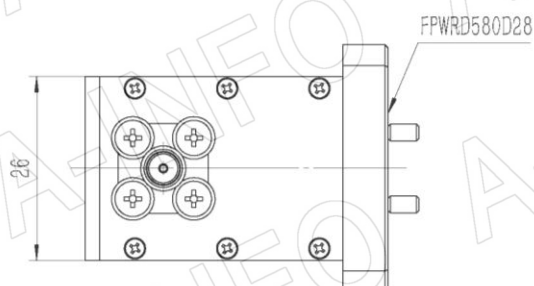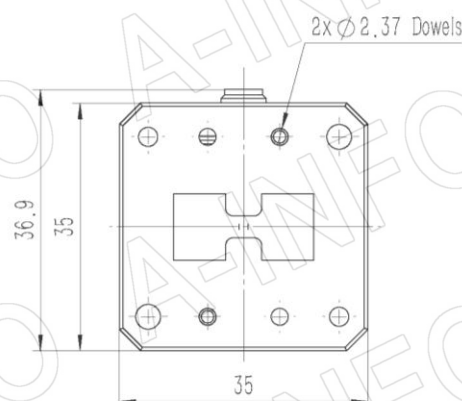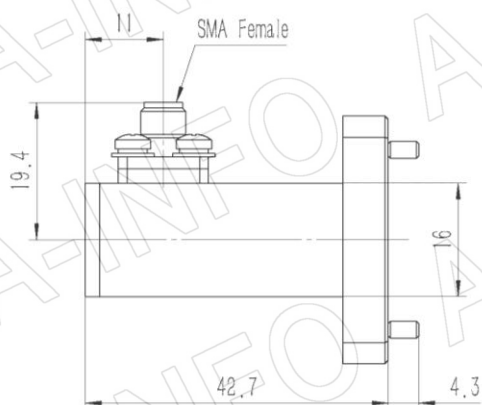

Flange Drawing (Size: mm)


FPWRD580D28

(With two through mounting holes
and two screws holes)

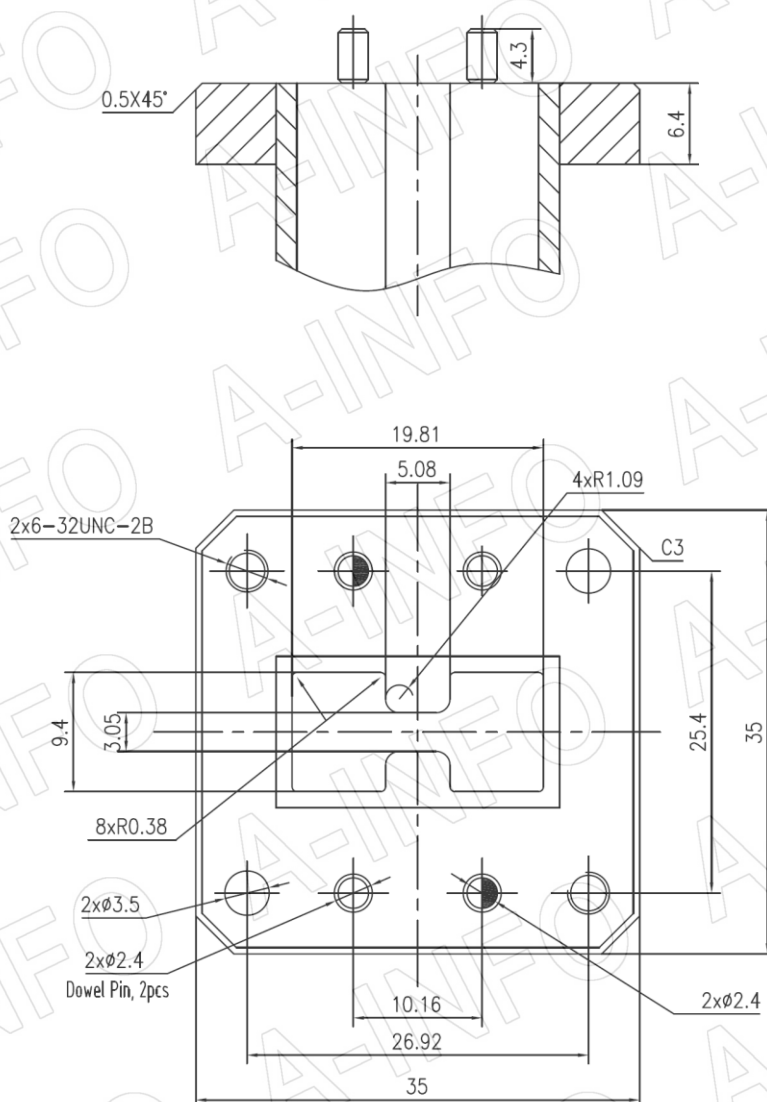

Test Results

I.L. (Test with two adapters back to back)

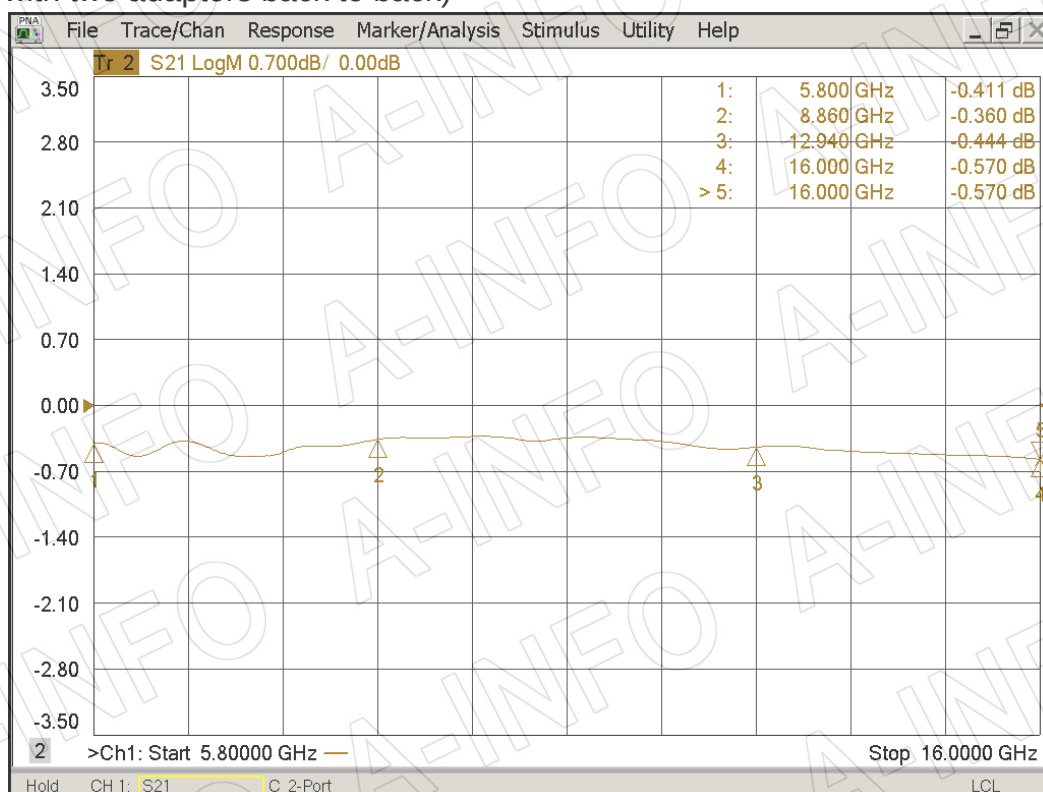

VSWR

