

For reference only. See data sheet for the detailed specifications.

Technical Specification




Waveguide	WR34
Frequency Range(GHz)	22.0 – 24.5
Circular WG Dia.(mm)	10.06
Length (mm/inch)	50.8/2
Insertion Loss(dB)	0.1 Max.
VSWR	1.10:1 Max.
Circular Waveguide Flange	UG595/U-M
Rectangular Waveguide Flange	FBP260(UBR260)
Material	Cu
Size(mm)	50.8 x 22.2 x 22.2
Net Weight(Kg)	0.06 Around

PATENT ID (China)

ZL202020594307.X

Outline Drawing (Size: mm)

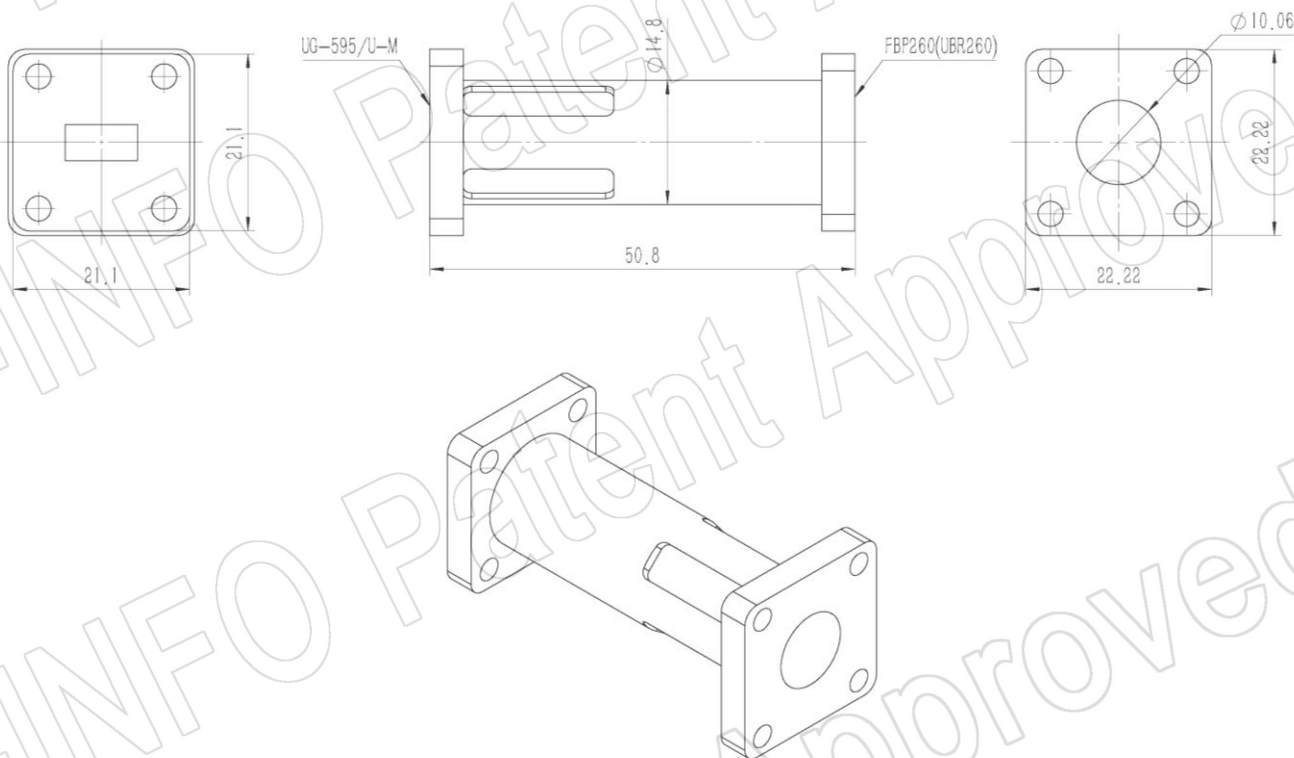

AINFO Inc.

China(Beijing):
China(Chengdu):
USA :


Tel: (+86) 10-6266-7326,
Tel: (+86) 28-8519-2786,
Tel: (+1) 949-639-9688,

(+86) 10-6266-7327
(+86) 28-8519-3044
(+1) 949-639-9608


Fax: (+86) 10-6266-7379
Fax: (+86) 28-8519-3068
Fax: (+1) 949-639-9670

Website: www.ainfoinc.com
Email: sales@ainfoinc.com

Flange Outline Drawing (Size: mm)

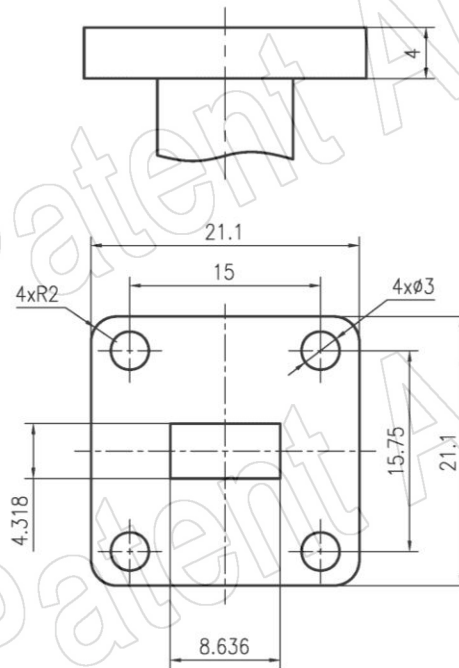

FBP260

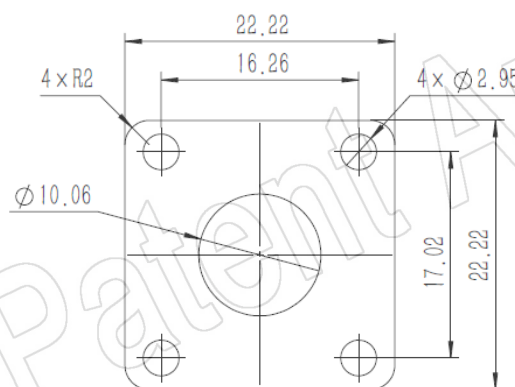

UG-595/U-M

AINFO Inc.

China(Beijing): Tel: (+86) 10-6266-7326,
China(Chengdu): Tel: (+86) 28-8519-2786,
USA : Tel: (+1) 949-639-9688,


Page 2 of 3

(+86) 10-6266-7327 Fax: (+86) 10-6266-7379
(+86) 28-8519-3044 Fax: (+86) 28-8519-3068
(+1) 949-639-9608 Fax: (+1) 949-639-9670

Website: www.ainfoinc.com
Email: sales@ainfoinc.com

Test Result

I.L. (Test with two transitions back to back)

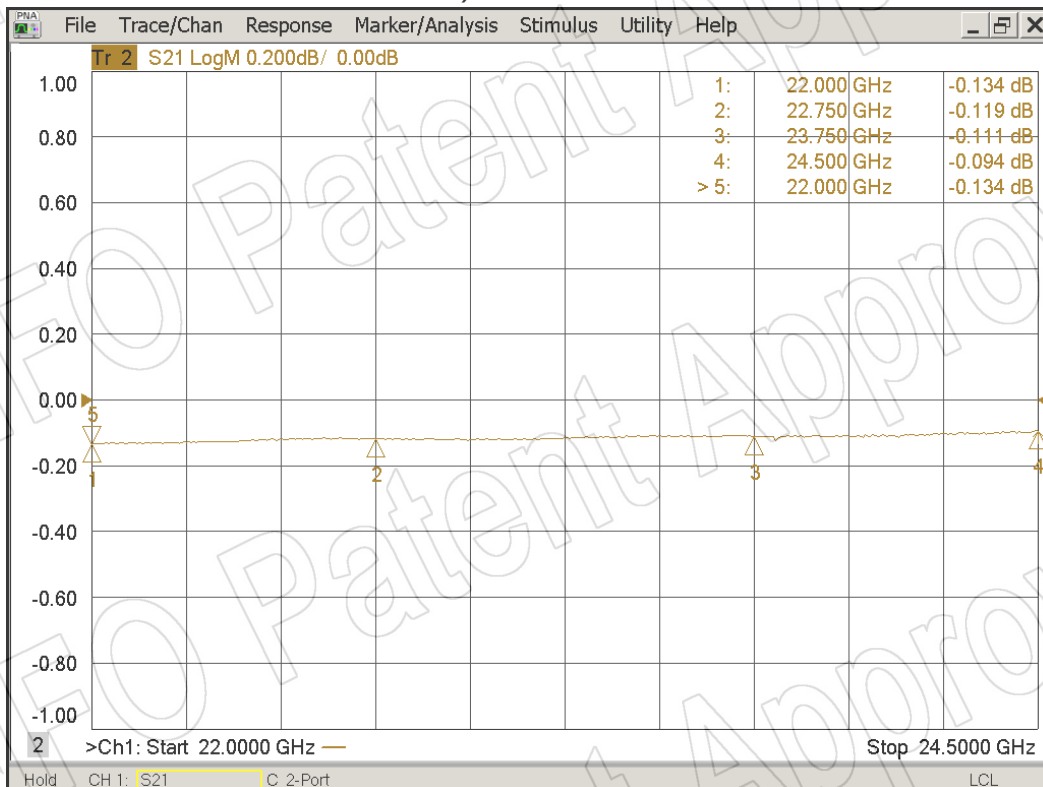

VSWR

