



For reference only. See data sheet for the detailed specifications.

Technical Specification



EIA WR	WR90
Frequency Range(GHz)	8.2 – 12.4
Attenuation(dB/m)	0.45 Max.
VSWR	1.15:1 Max.
Average Power(KW)	0.96
Max. Twist(deg/m)	308
Min. E-Bend Radius(mm)	66
Min. H-Bend Radius(mm)	132
Flange	FBP100-M(UBR100-M)
Jacket	Rubber
Operating Temp.(°C)	-55 ~ +85
Material	Cu
Length(mm)	540
Net Weight(Kg)	0.34 Around

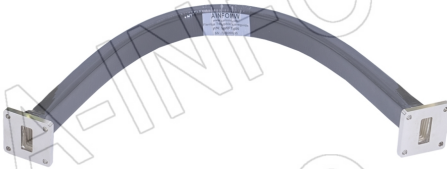

Outline Drawing (Size: mm)

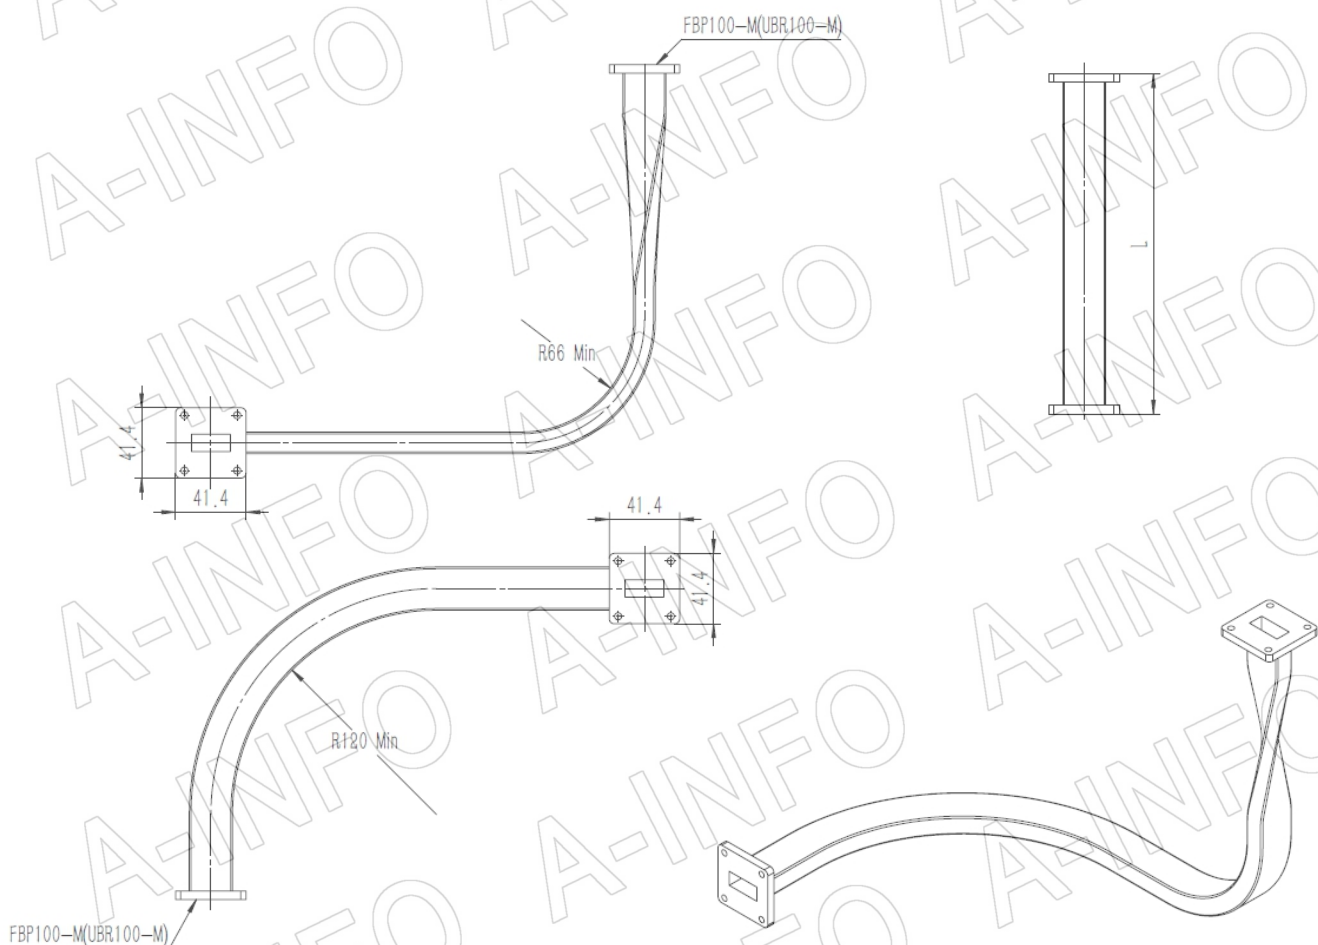


Flange Drawing (Size: mm)

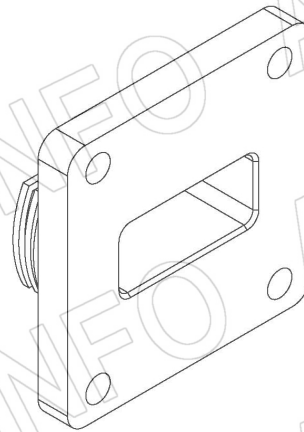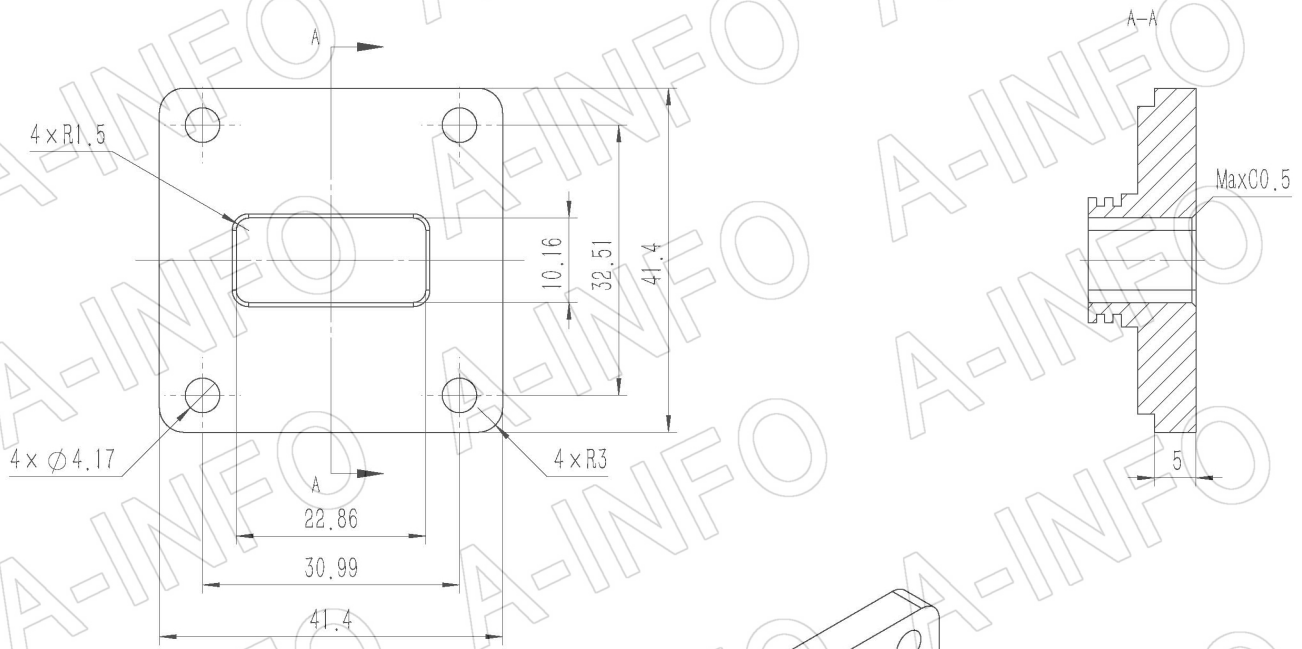

FBP100-M

Test Results

Attenuation(I.L.: 0.2685dB/m Max.)

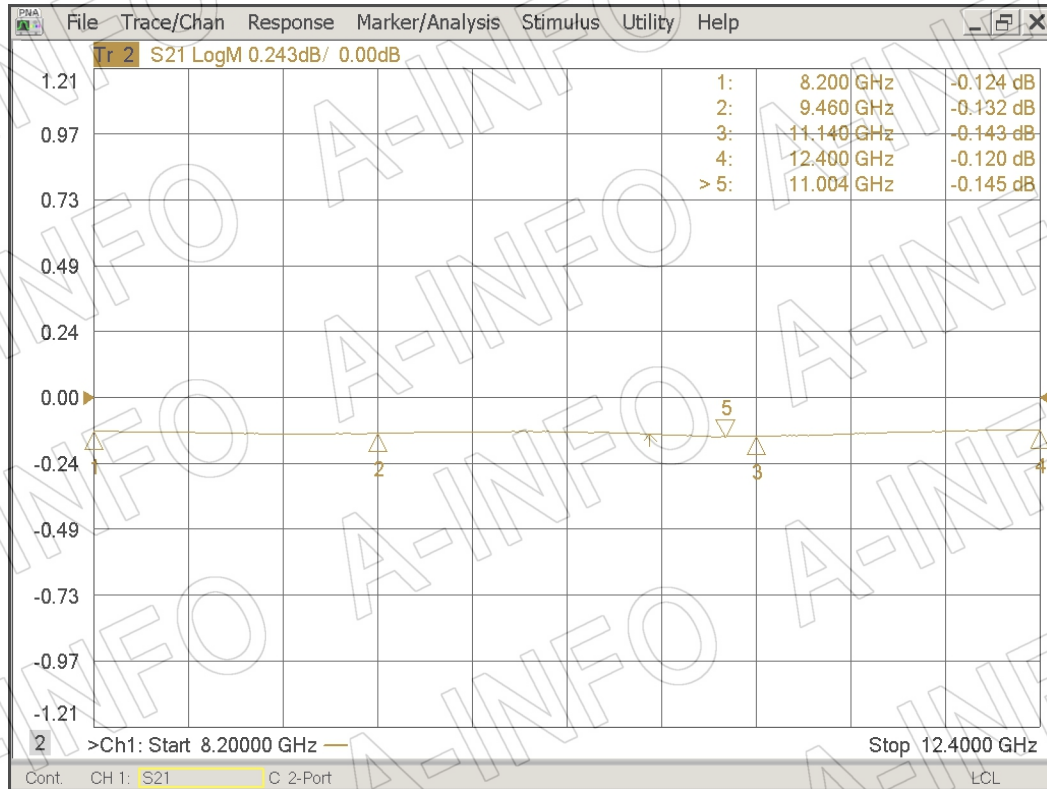

VSWR

