






For reference only. See data sheet for the detailed specifications.

Technical Specification

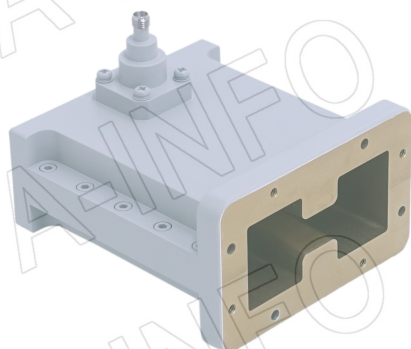

EIA WRD	WRD200
Frequency Range(GHz)	2.0 - 4.8
Insertion Loss(dB)	0.3 Max.
VSWR	1.30:1 Max.
Flange	FPWRD200D24
Connector	SMA-Female
Average Power(W CW)	50 Max.
Peak Power(KW)	3
Material	Al
Finish	Chemical Conversion Coating, Gray Paint
Size(mm)	97 x 90.2 x 76.8
Net Weight(Kg)	0.44 Around

Outline Drawing (Size: mm)

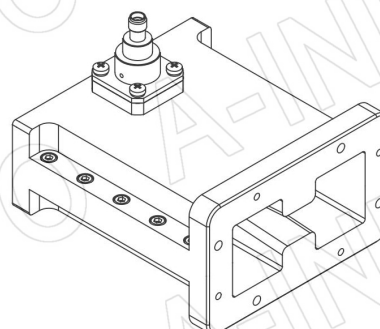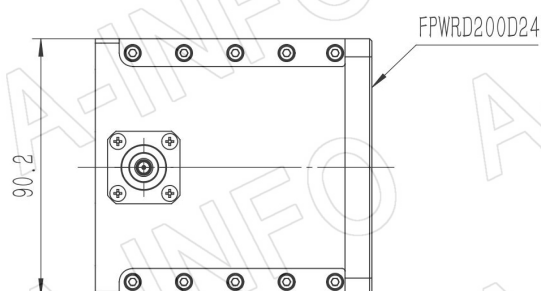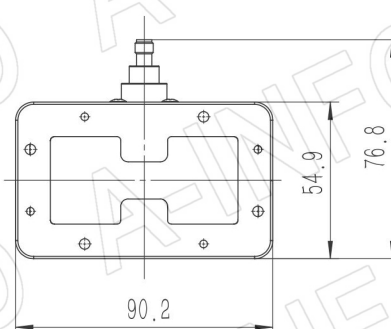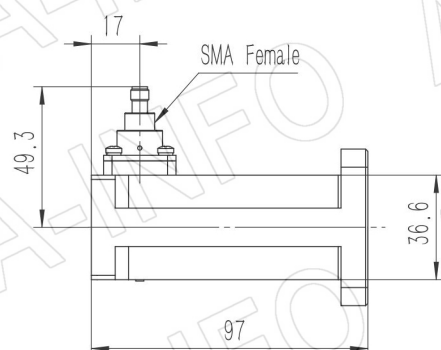

AINFO Inc.

Page 1 of 3

China(Beijing): Tel: (+86) 10-6266-7326,
China(Chengdu): Tel: (+86) 28-8519-2786,
USA : Tel: (+1) 949-639-9688,

(+86) 10-6266-7327
(+86) 28-8519-3044
(+1) 949-639-9608


Fax: (+86) 10-6266-7379
Fax: (+86) 28-8519-3068
Fax: (+1) 949-639-9670

Website: www.ainfoinc.com
Email: sales@ainfoinc.com

Flange Drawing (Size: mm)


FPWRD200D24

(With four through mounting holes
and four screws holes)

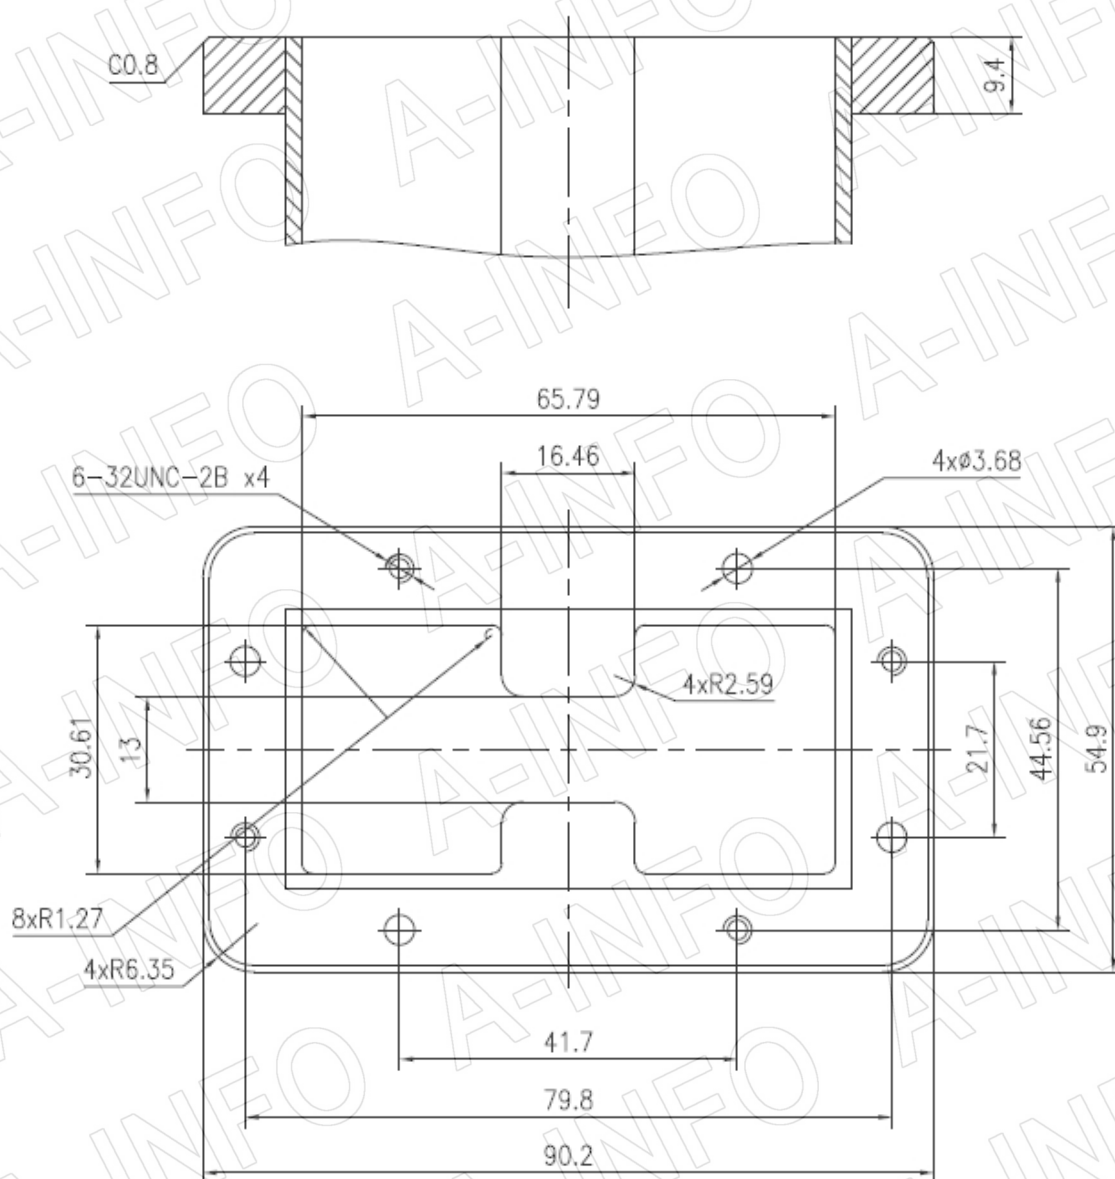

Test Results

I. L. (Test with two adapters back to back)

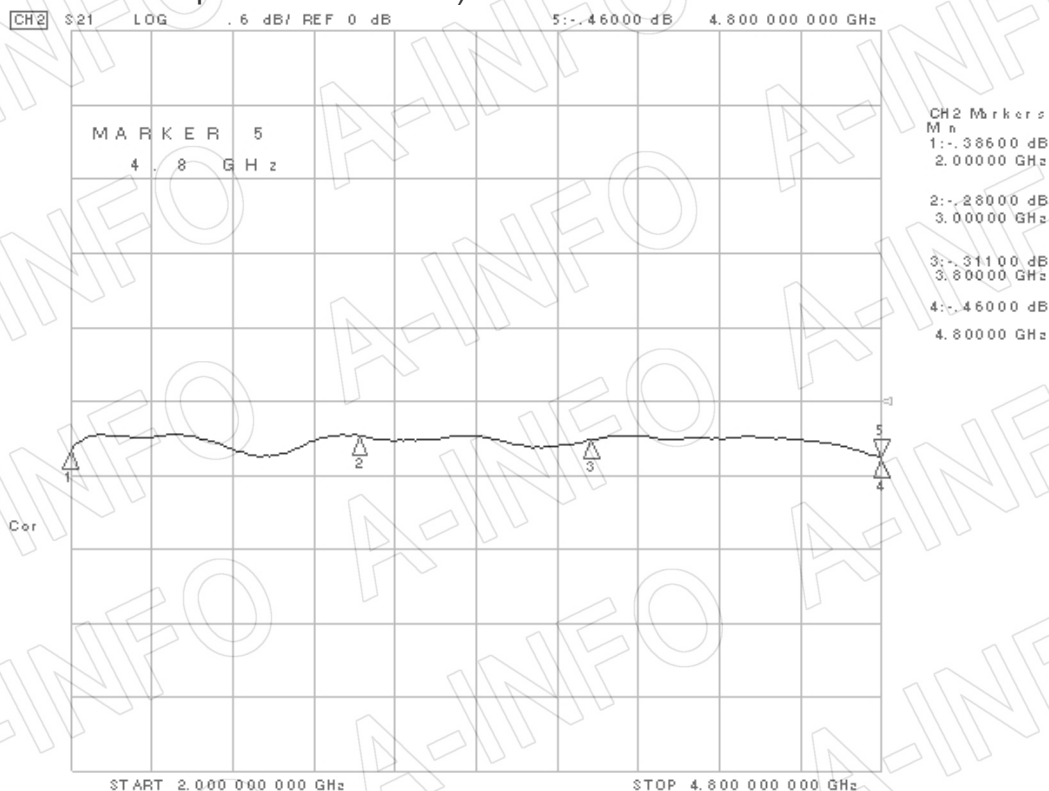

VSWR

