





For reference only. See data sheet for the detailed specifications.

Technical Specification

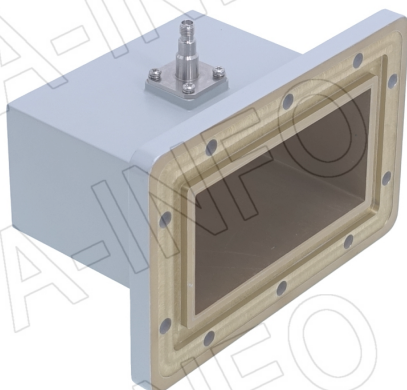

EIA WR	WR430
Frequency Range(GHz)	1.7 – 2.6
Insertion Loss(dB)	0.13 Max.
VSWR	1.25:1 Max.
Flange	FDM22(PDR22)
Connector	SMA-Female
Average Power(W CW)	50 Max.
Peak Power(KW)	3
Material	Al
Finish	Chemical Conversion Coating, Gray Paint
Size(mm)	100 x 161.1 x 113.4
Net Weight(Kg)	0.60 Around

Outline Drawing (Size: mm)

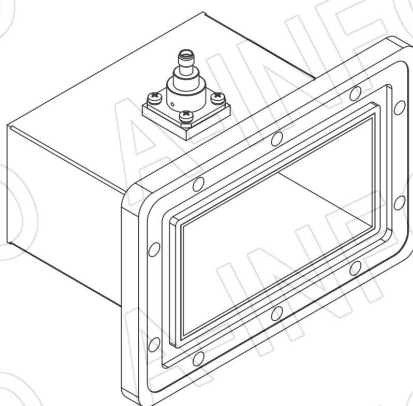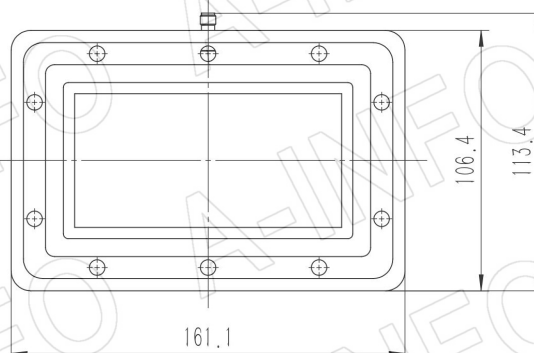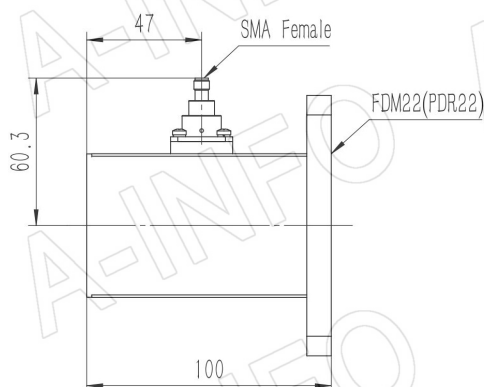

AINFO Inc.


China(Beijing): Tel: (+86) 10-6266-7326,
China(Chengdu): Tel: (+86) 28-8519-2786,
USA : Tel: (+1) 949-639-9688,

Page 1 of 3

(+86) 10-6266-7327 Fax: (+86) 10-6266-7379
(+86) 28-8519-3044 Fax: (+86) 28-8519-3068
(+1) 949-639-9608 Fax: (+1) 949-639-9670

Website: www.ainfoinc.com
Email: sales@ainfoinc.com


Flange Drawing (Size: mm)

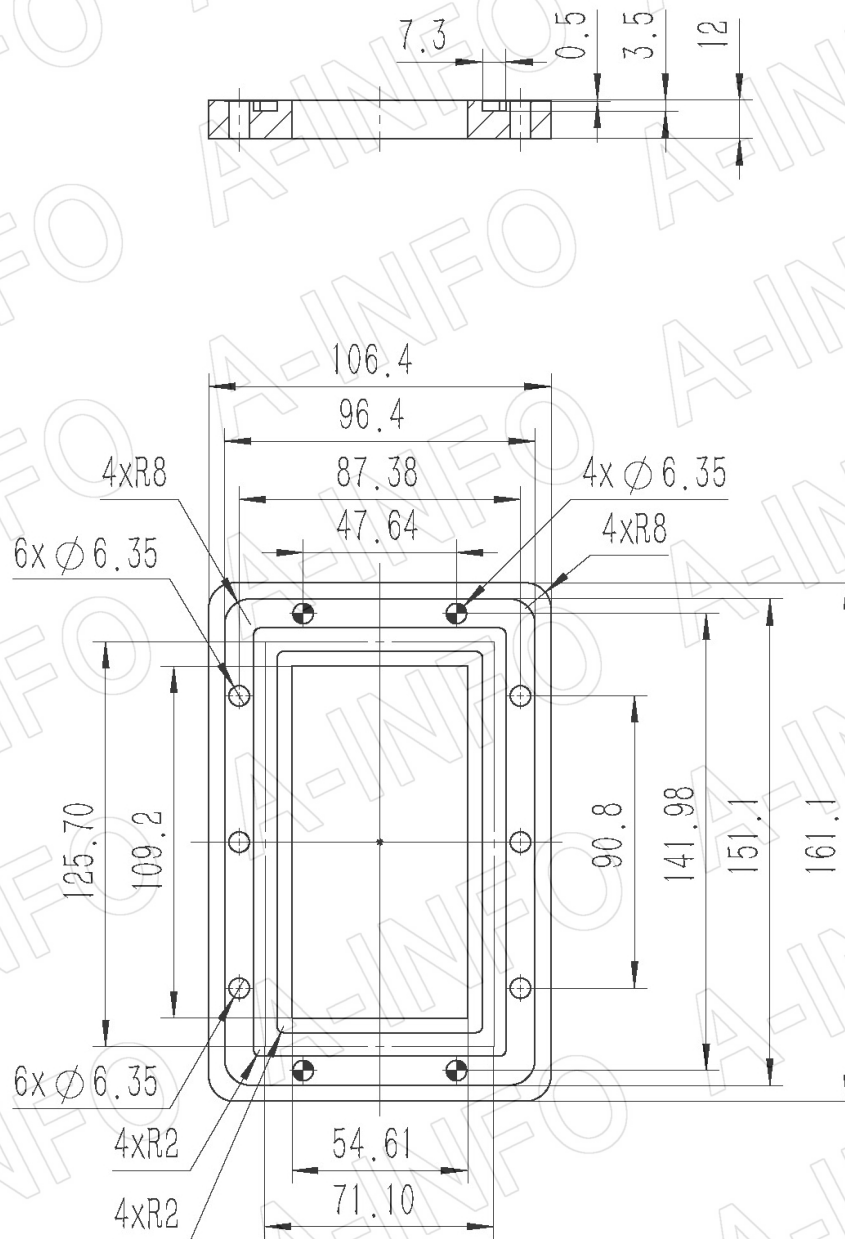

FDM22

Test Results

Insertion Loss (Test with two adapters back to back)

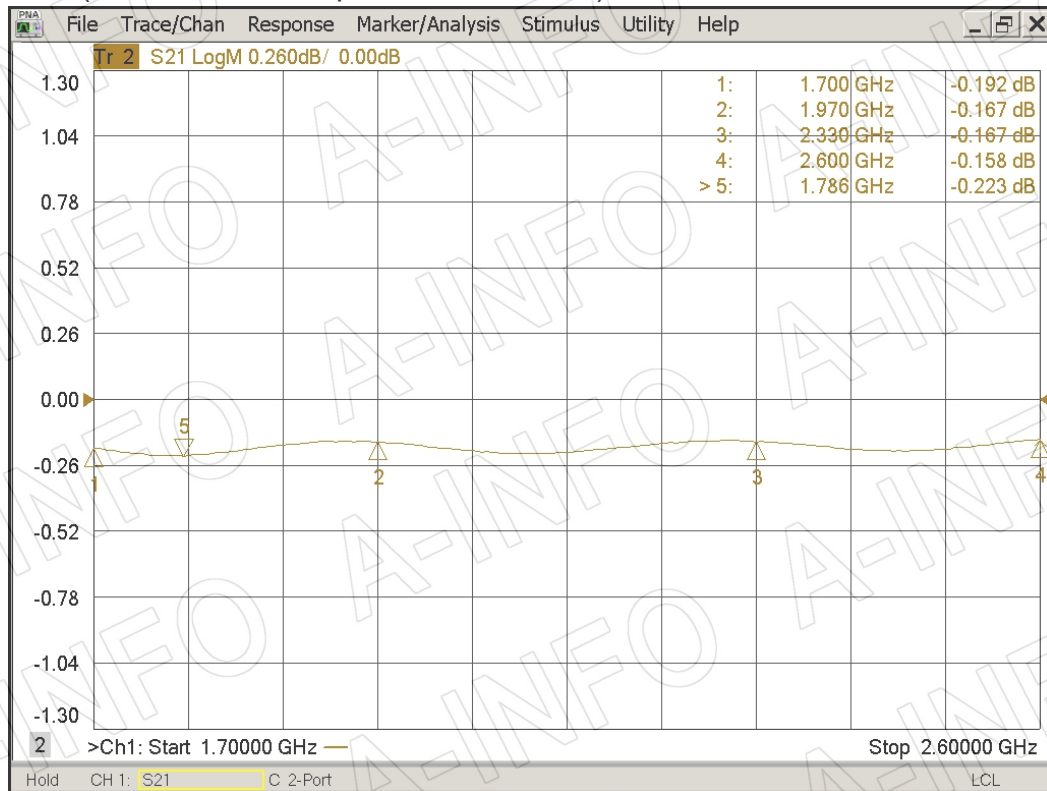

VSWR

