


For reference only. See data sheet for the detailed specifications.

Technical Specification

EIA WR	WR90
Frequency Range(GHz)	8.2 – 12.4
Coupling(dB)	60
Coupling Accuracy(dB)	±1.0 Max.
Frequency Sensitivity(dB)	±0.7 Max.
Directivity(dB)	30 Min.
Insertion Loss(dB)	0.2 Max. (Not including the theoretical loss 4.34×10^{-6} dB)
Mainline VSWR	1.05:1 Max.
Secondline VSWR	1.25:1 Max.
Flange	FBP100(UBR100)
Coupling Port	N-Female or N-Male
Material	Al
Finish	Chemical Conversion Coating, Gray Paint
Size(mm)	423.68 x 41.4 x 61
Net Weight(Kg)	0.74 Around

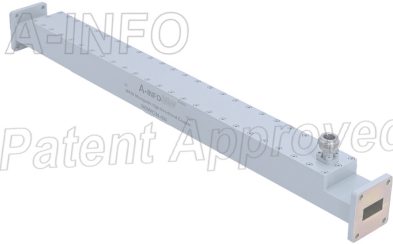


PATENT ID (China)

ZL201830355381.4

Outline Drawing (Size: mm)

Coupling Port: N-Female

For N-Male connector Coupling Port outline drawing, please contact A-INFO.

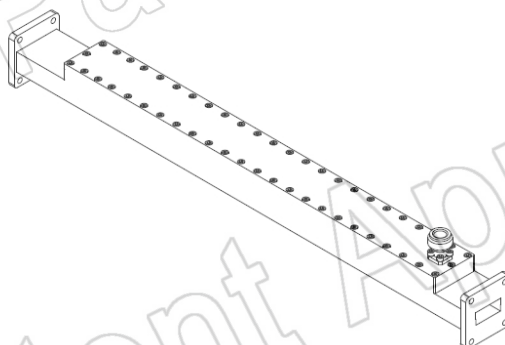

AINFO Inc.

China(Beijing):
China(Chengdu):
USA :


Tel: (+86) 10-6266-7326,
Tel: (+86) 28-8519-2786,
Tel: (+1) 949-639-9688,

(+86) 10-6266-7327
(+86) 28-8519-3044
(+1) 949-639-9608

Fax: (+86) 10-6266-7379
Fax: (+86) 28-8519-3068
Fax: (+1) 949-639-9670

Website: www.ainfoinc.com
Email: sales@ainfoinc.com

Flange Drawing (Size: mm)

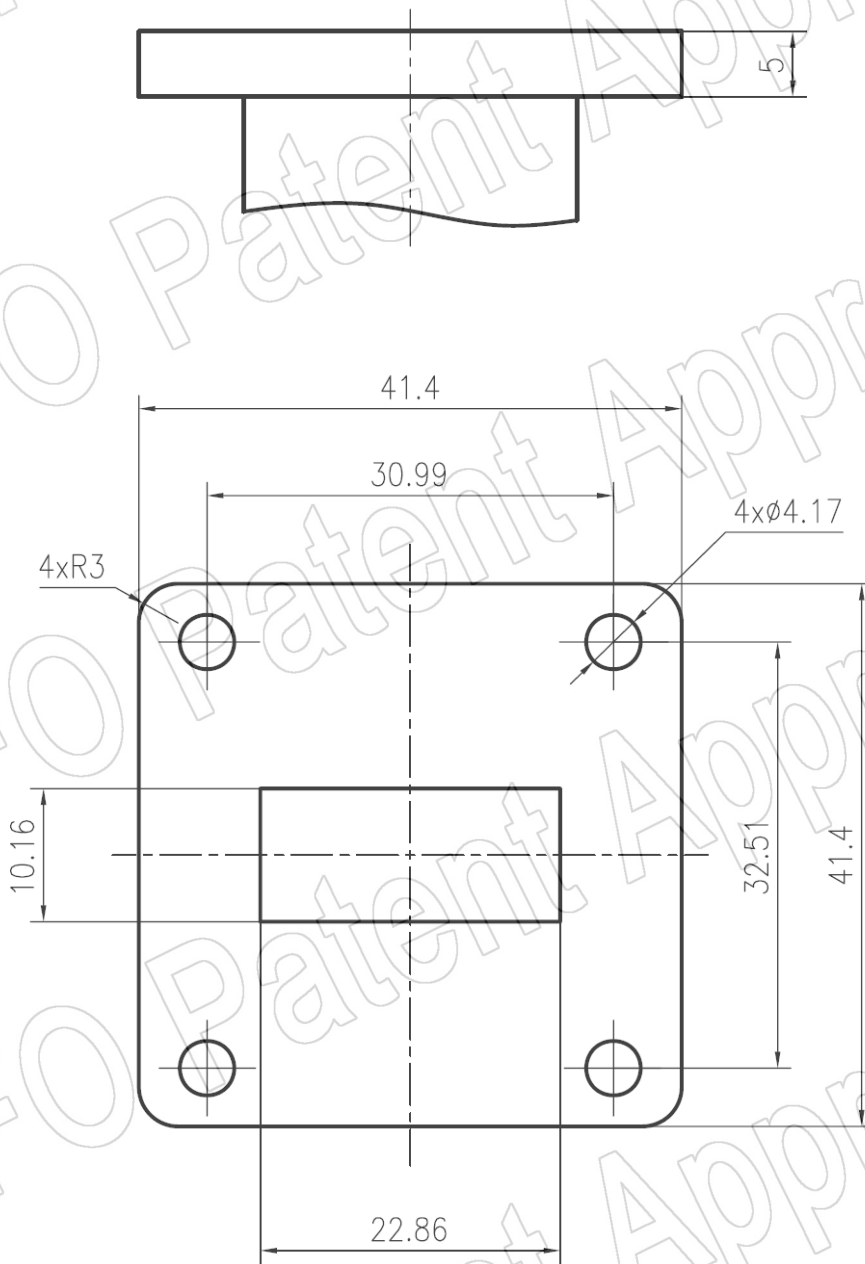

FBP100

AINFO Inc.

China(Beijing):
China(Chengdu):
USA :

Tel: (+86) 10-6266-7326,
Tel: (+86) 28-8519-2786,
Tel: (+1) 949-639-9688,


(+86) 10-6266-7327
(+86) 28-8519-3044
(+1) 949-639-9608

Fax: (+86) 10-6266-7379
Fax: (+86) 28-8519-3068
Fax: (+1) 949-639-9670


Website: www.ainfoinc.com
Email: sales@ainfoinc.com

Test Results


Coupling

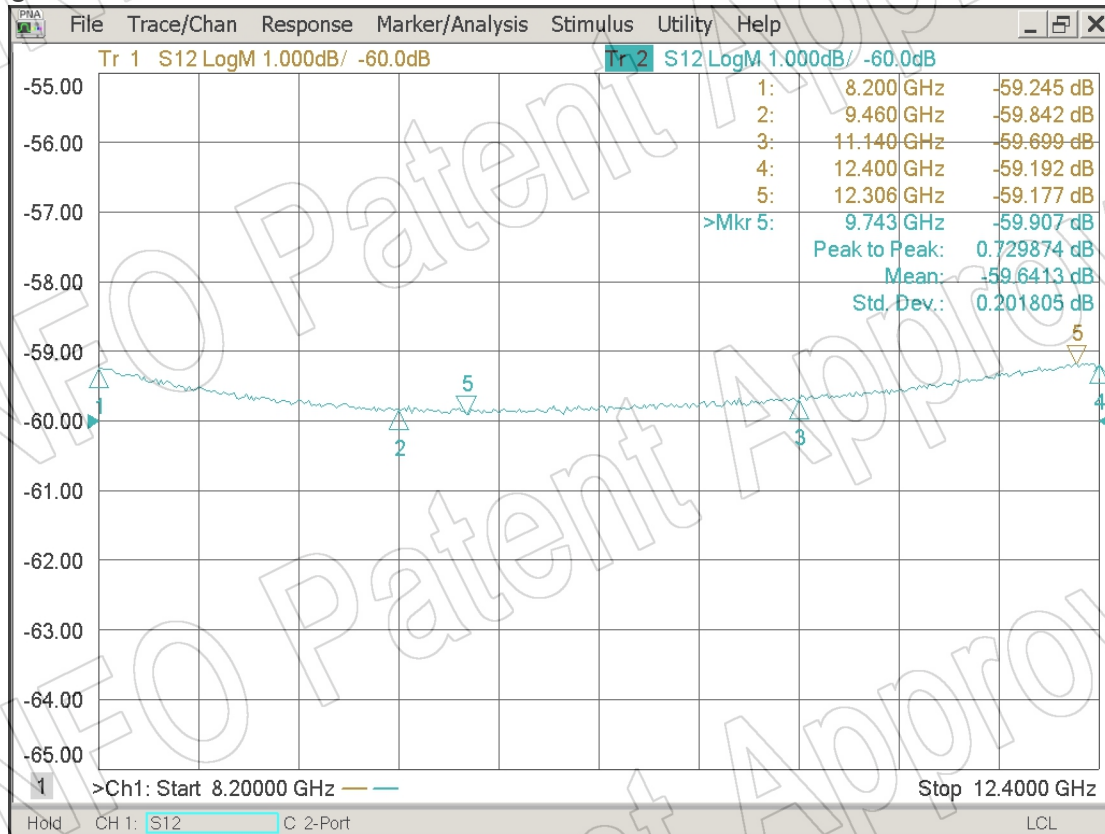


Directivity

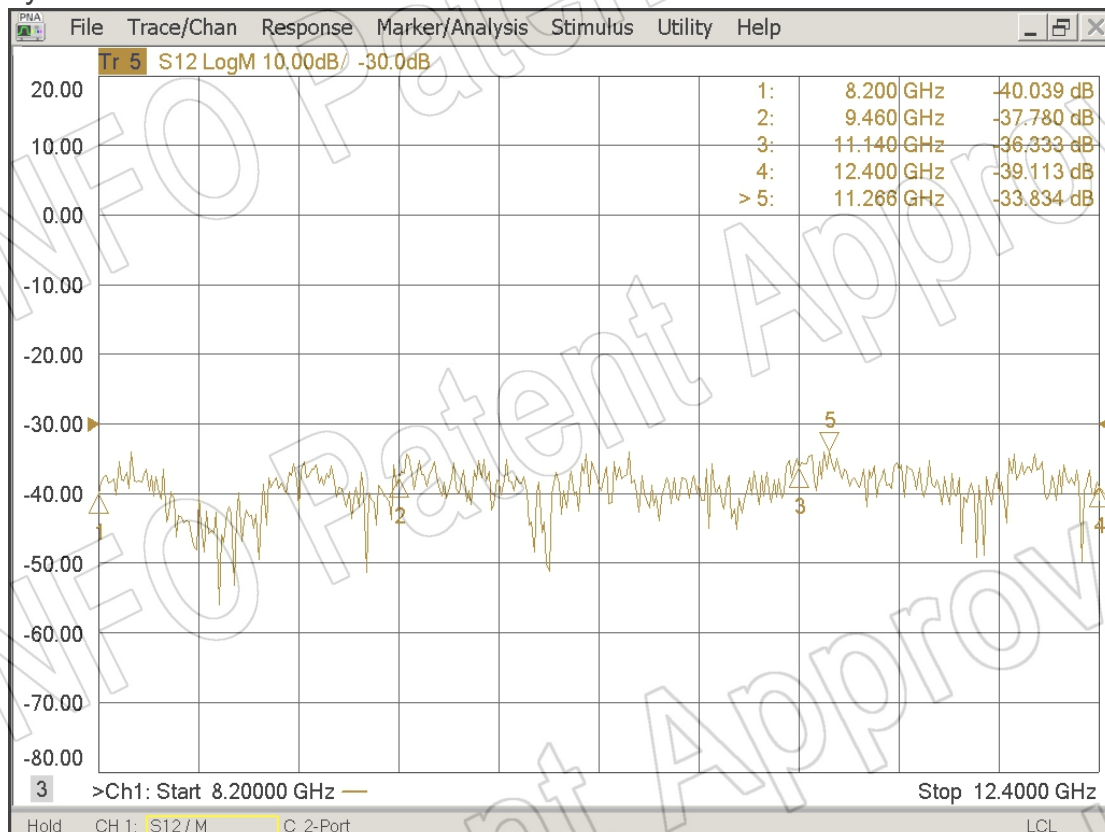

I.L.(Including the theoretical loss 4.34×10^{-6} dB)

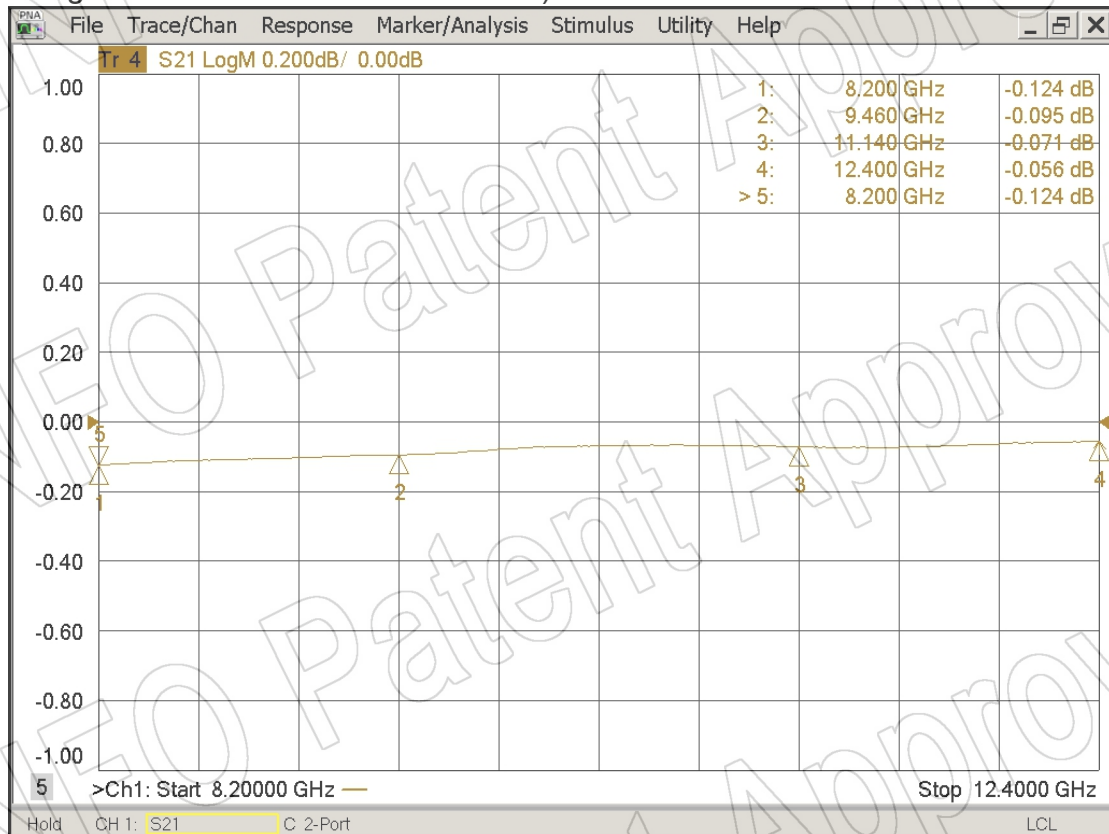

Mainline VSWR

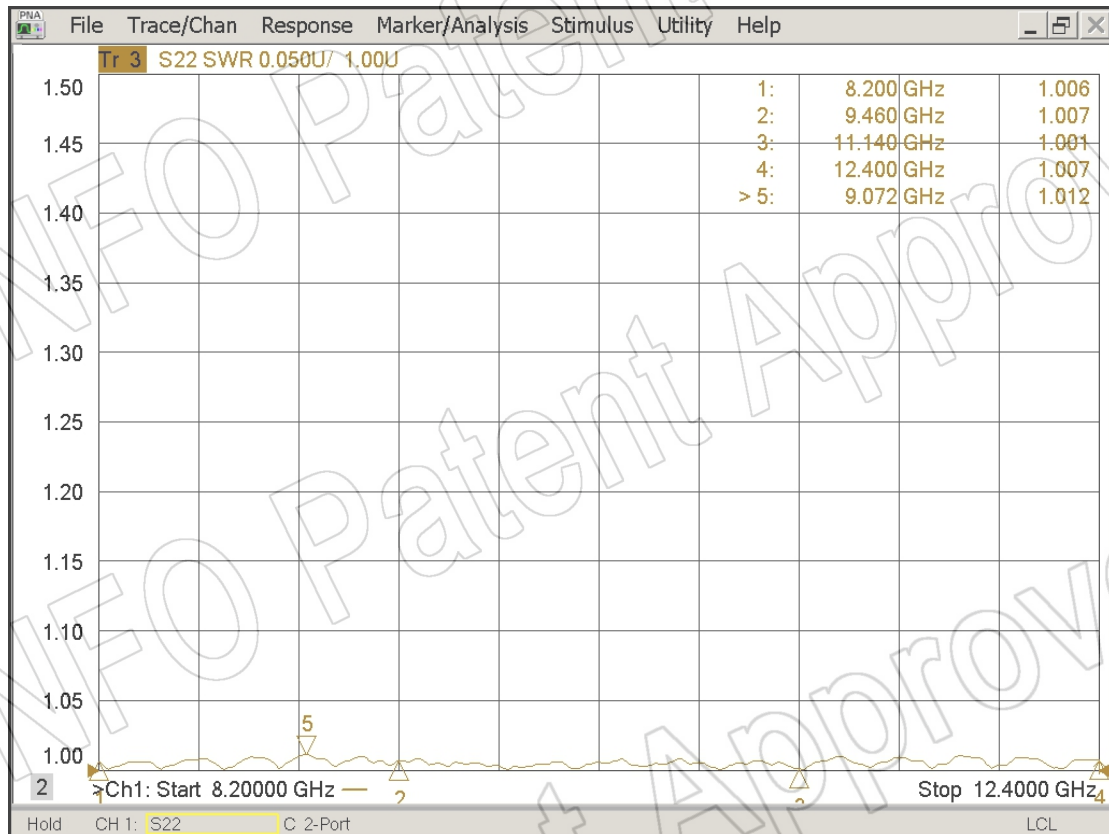

Secondline VSWR

