


For reference only. See data sheet for the detailed specifications.

Technical Specification



EIA WRD	WRD580
Frequency Range(GHz)	5.8 – 16.0
Insertion Loss(dB)	0.35 Max.
VSWR	1.30:1 Max.
Flange	FPWRD580D28
Connector	N-Female
Average Power(W CW)	150 Max.
Peak Power(KW)	3
Material	Cu
Finish	Passivation, Gray Paint
Size(mm)	42.7 x 35 x 51.5
Net Weight(Kg)	0.16 Around

Outline Drawing (Size: mm)

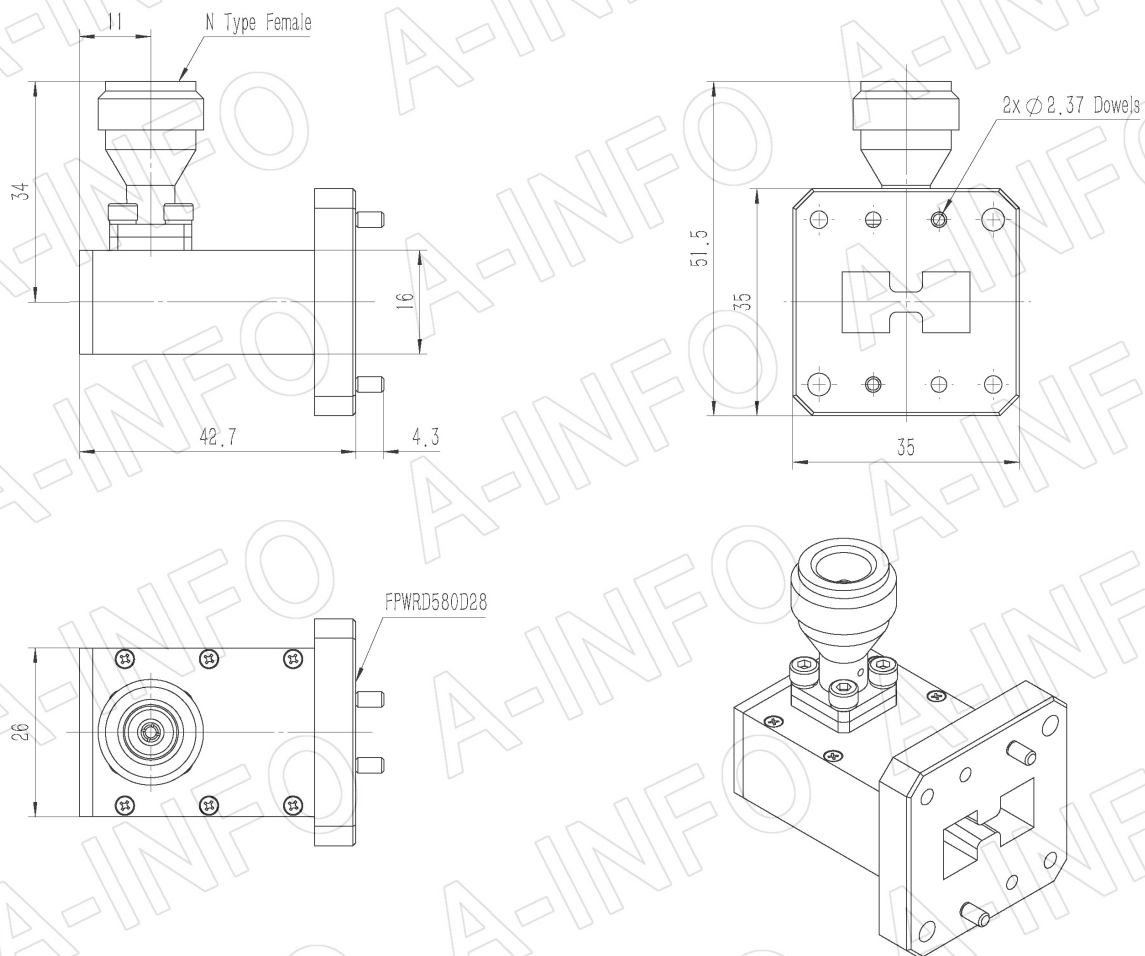

AINFO Inc.

Page 1 of 3

China(Beijing): Tel: (+86) 10-6266-7326,
China(Chengdu): Tel: (+86) 28-8519-2786,
USA : Tel: (+1) 949-639-9688,

(+86) 10-6266-7327
(+86) 28-8519-3044
(+1) 949-639-9608


Fax: (+86) 10-6266-7379
Fax: (+86) 28-8519-3068
Fax: (+1) 949-639-9670

Website: www.ainfoinc.com
Email: sales@ainfoinc.com

Flange Drawing (Size: mm)

FPWRD580D28

(With two through mounting holes
and two screws holes)

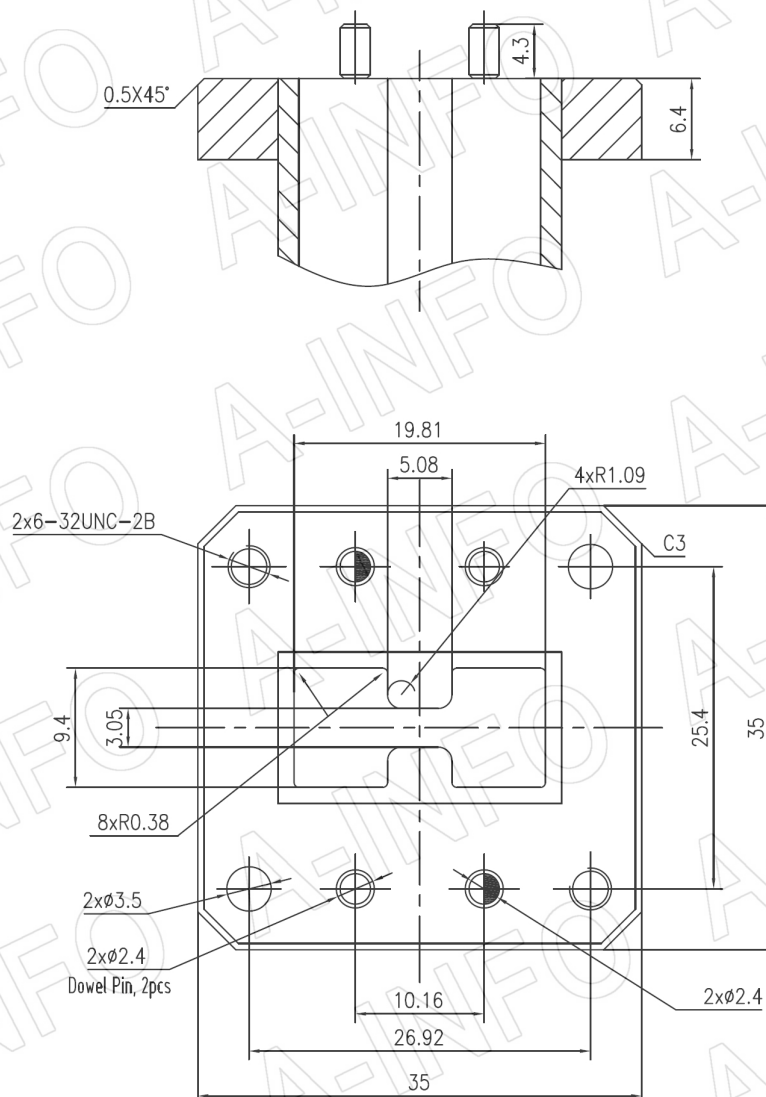

AINFO Inc.

Page 2 of 3

China(Beijing): Tel: (+86) 10-6266-7326,
China(Chengdu): Tel: (+86) 28-8519-2786,
USA : Tel: (+1) 949-639-9688.


(+86) 10-6266-7327
(+86) 28-8519-3044
(+1) 949-639-9608

Fax: (+86) 10-6266-7379
Fax: (+86) 28-8519-3068
Fax: (+1) 949-639-9670

Website: www.ainfoinc.com
Email: sales@ainfoinc.com

Test Results

I.L. (Test with two adapters back to back)

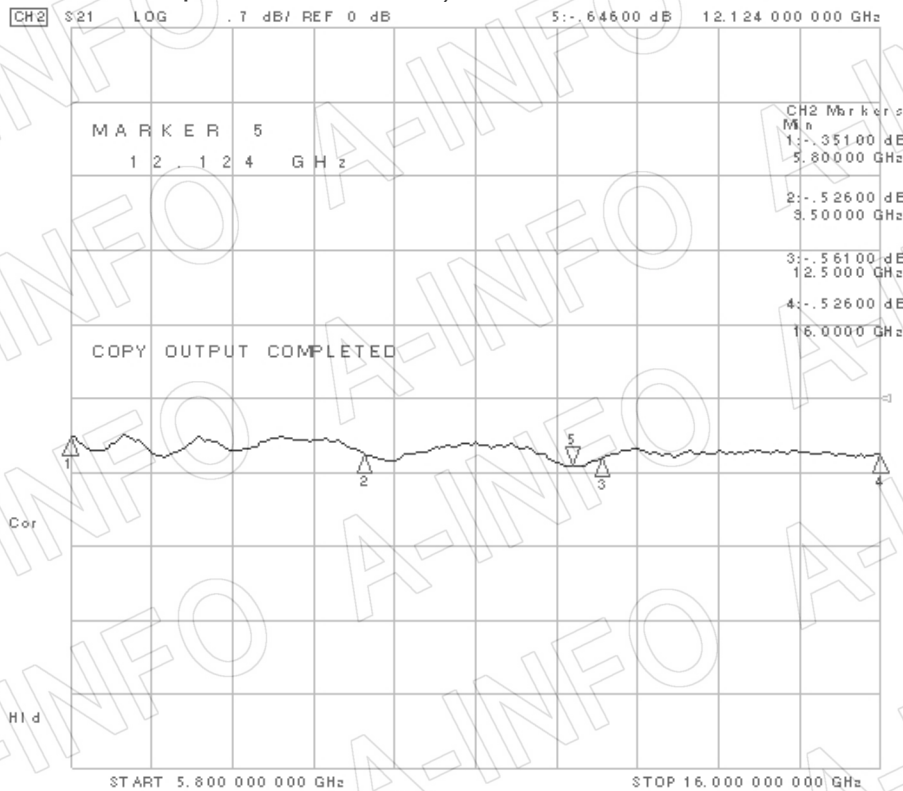

VSWR

