




For reference only. See data sheet for the detailed specifications.

## Technical Specification

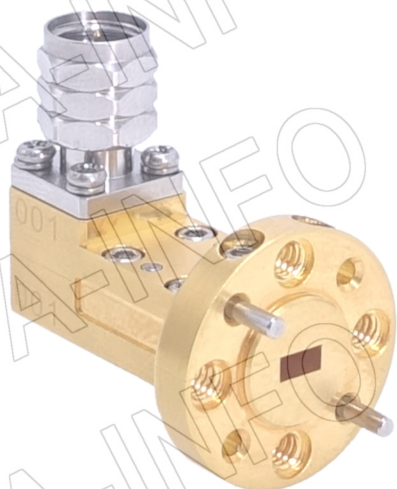

|                      |                   |
|----------------------|-------------------|
| EIA WR               | WR15              |
| Frequency Range(GHz) | 50.0 – 65.0       |
| Insertion Loss(dB)   | 0.8 Max.          |
| VSWR                 | 1.80:1 Max.       |
| Flange               | FUGP620(UG-385/U) |
| Connector            | 1.85mm-Male       |
| Average Power(W CW)  | 5 Max.            |
| Peak Power(KW)       | 0.01              |
| Material             | Cu                |
| Finish               | Gold Plated       |
| Size(mm)             | 28 x 19.1 x 28.1  |
| Net Weight(Kg)       | 0.03 Around       |

## Outline Drawing (Size: mm)

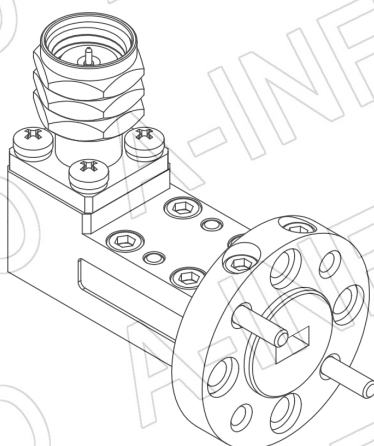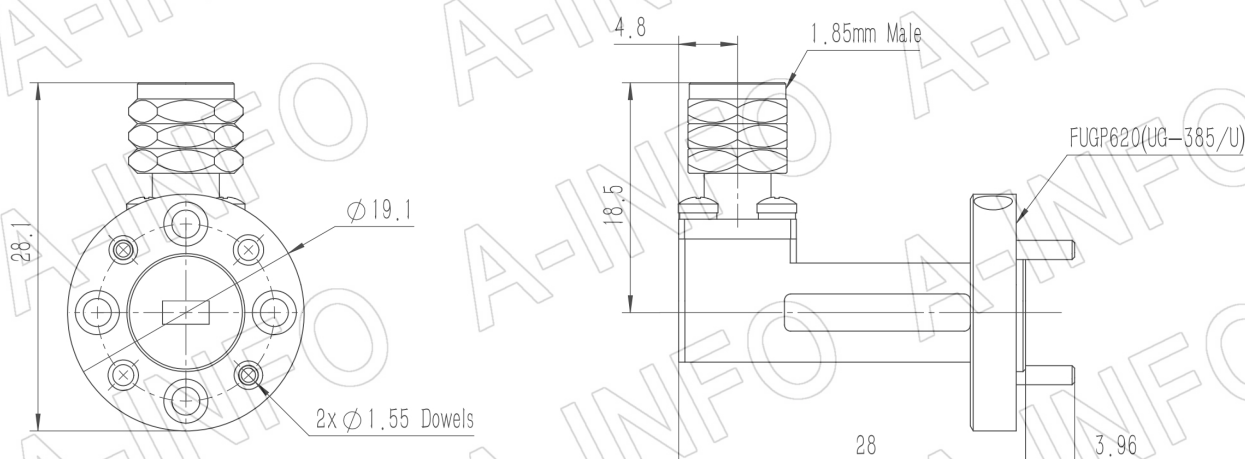

AINFO Inc.

Page 1 of 3


China(Beijing): Tel: (+86) 10-6266-7326,  
China(Chengdu): Tel: (+86) 28-8519-2786,  
USA : Tel: (+1) 949-639-9688,

(+86) 10-6266-7327  
(+86) 28-8519-3044  
(+1) 949-639-9608

Fax: (+86) 10-6266-7379  
Fax: (+86) 28-8519-3068  
Fax: (+1) 949-639-9670

Website: [www.ainfoinc.com](http://www.ainfoinc.com)  
Email: [sales@ainfoinc.com](mailto:sales@ainfoinc.com)


## Flange Drawing (Size: mm)

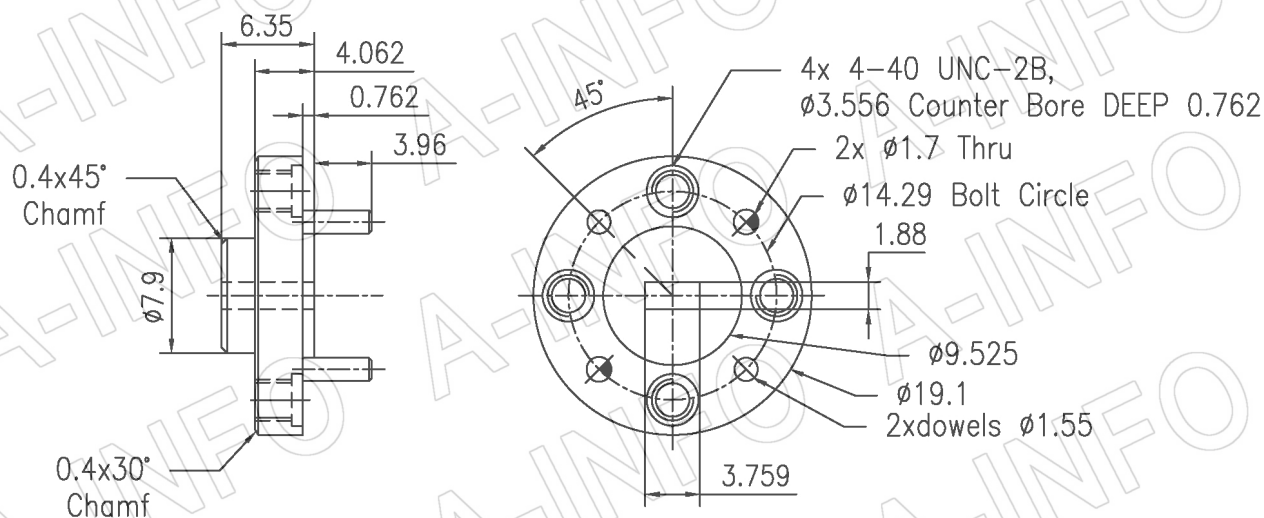

FUGP620  
(equivalent to UG-385/U)

## Test results

I.L. (Test with two adapters back to back)

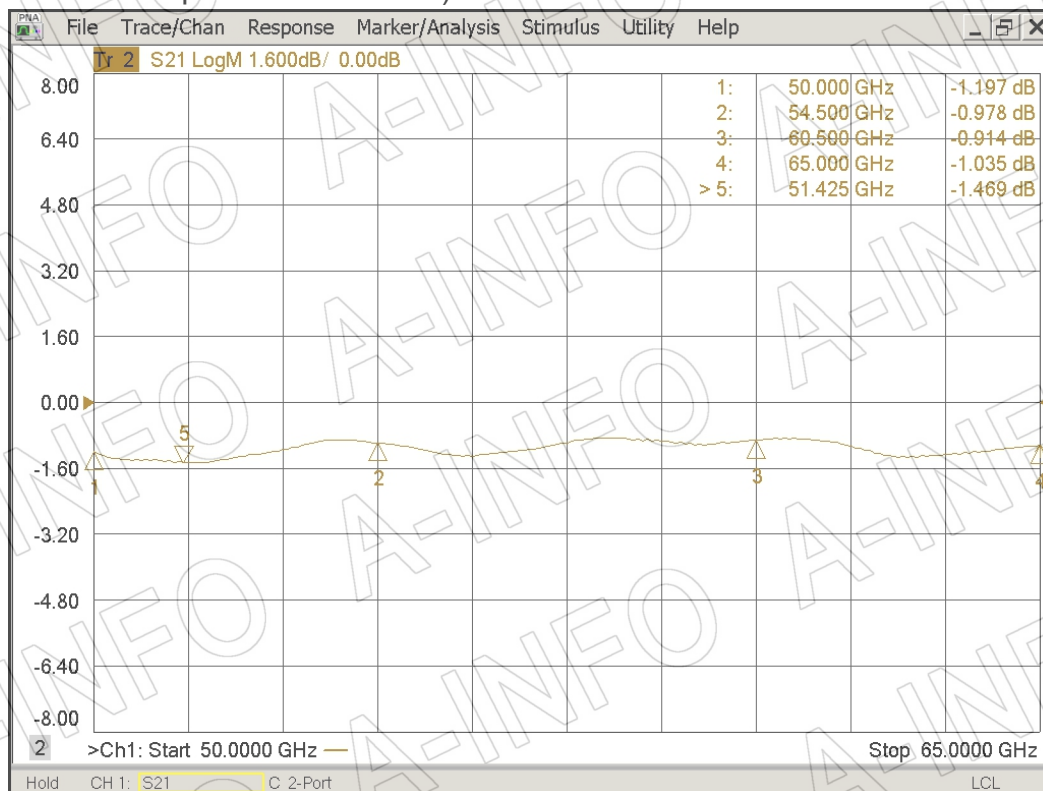

## VSWR

