

For reference only. See data sheet for the detailed specifications.



Technical Specification



Frequency Range(GHz)	18.0 – 40.0
Gain(dBi)	26 Typ.
Polarization	Linear
3dB Beamwidth(deg)	E Plane: 7 Typ.
	H Plane: 9 Typ.
Cross Pol. Isolation(dB)	40 Typ.
VSWR	A Type: 1.8:1 Max.
	C Type: 2.0:1 Max.
Output	A Type: FPWRD180C24
	C Type: 2.92mm-Female or 2.4mm-Female or 2.92mm-Male
Material	Al
Finish	Gold Plated, Silver Plated and Chemical Conversion Coating, Gray Paint
Size(mm)	A Type: 100 x 100 x 204.2
	C Type: 100 x 100 x 230.2
Net Weight(Kg)	A Type: 0.53 Around
	C Type: 0.58 Around

Outline Drawing (Size: mm)

FPWRD180C24 Output (P/N: LB-CL-180400-20-A)

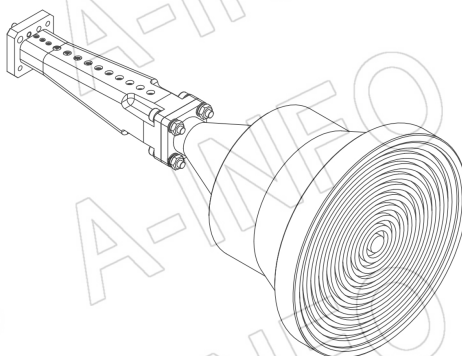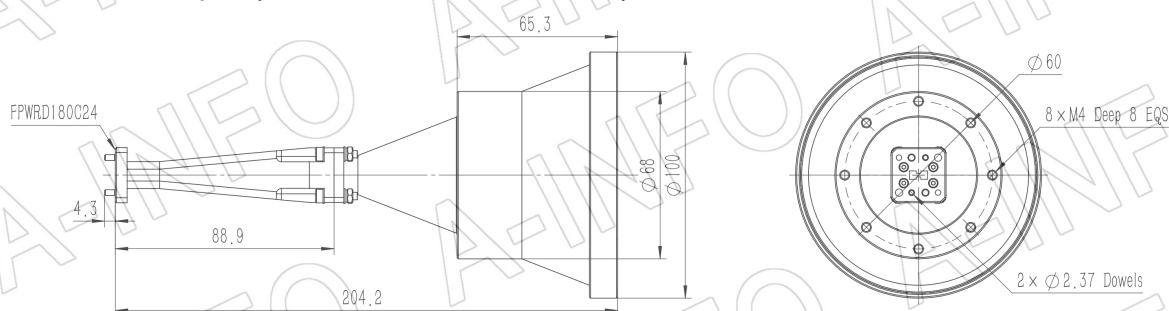

AINFO Inc.

China(Beijing): Tel: (+86) 10-6266-7326,
China(Chengdu): Tel: (+86) 28-8519-2786,
USA: Tel: (+1) 949-639-9688,



Page 1 of 14

(+86) 10-6266-7327 Fax: (+86) 10-6266-7379
(+86) 28-8519-3044 Fax: (+86) 28-8519-3068
(+1) 949-639-9608 Fax: (+1) 949-639-9670

Website: www.ainfoinc.com
Email: sales@ainfoinc.com


2.92mm-Female Output (P/N: LB-CL-180400-20-C-KF)

For 2.4mm-Female or 2.92mm-Male output outline drawing, please contact A-INFO.

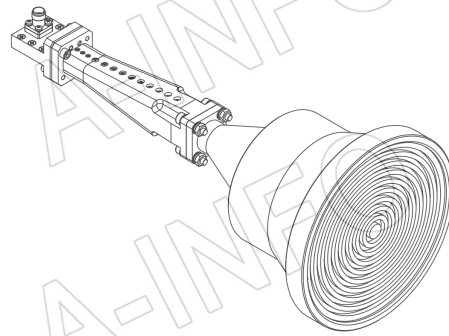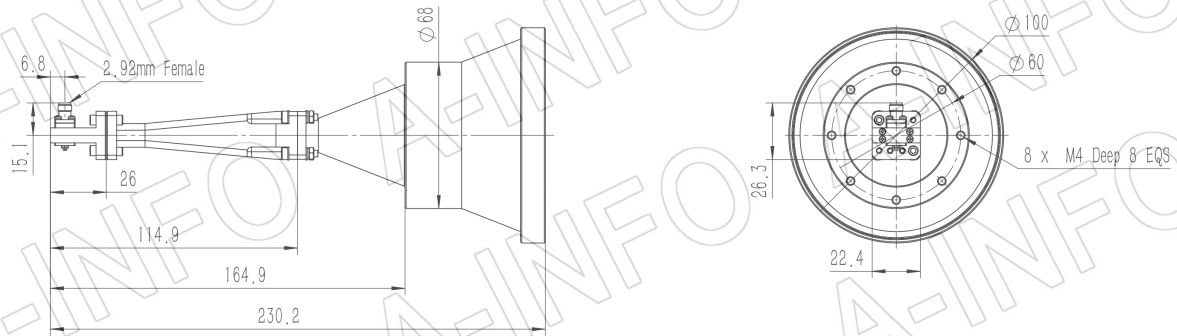


2.92mm-Female Output with L Type Mounting Bracket (Option, P/N: LB-CL-12-18-L)

For 2.4mm-Female or 2.92mm-Male output outline drawing, please contact A-INFO.

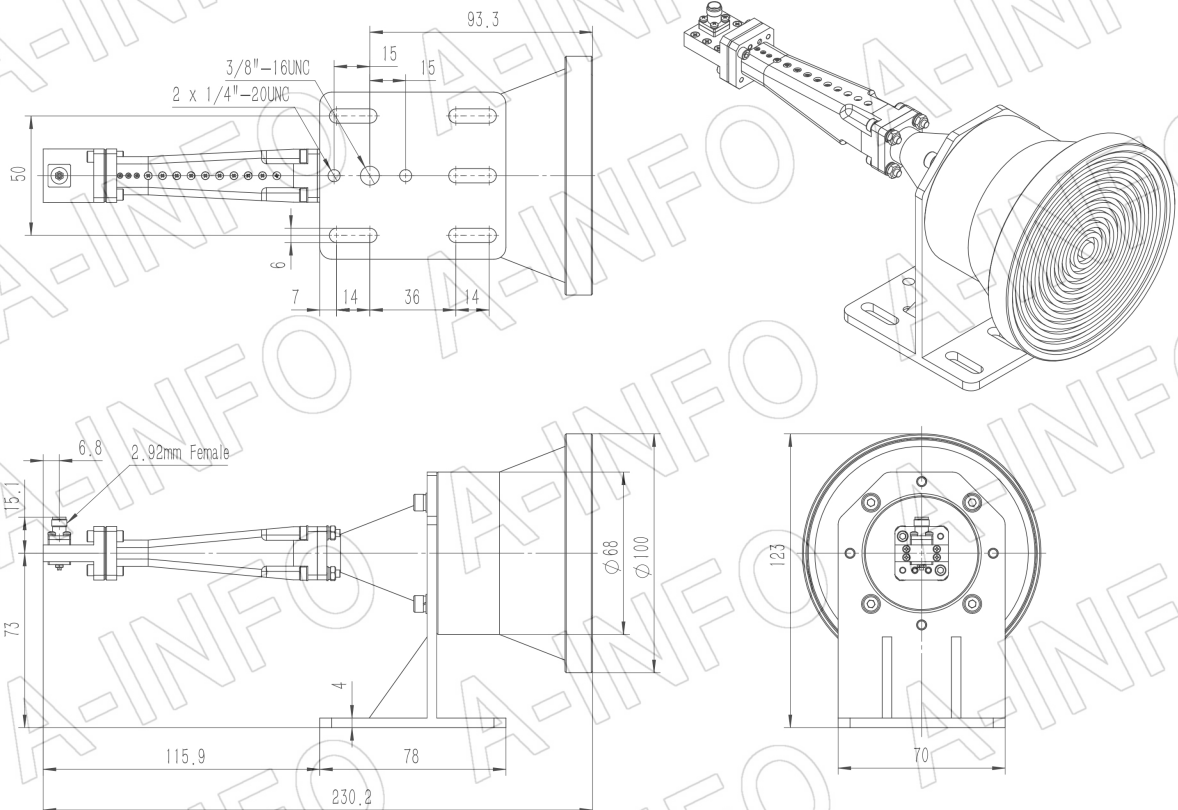



Flange Drawing (Size: mm)

FPWRD180C24

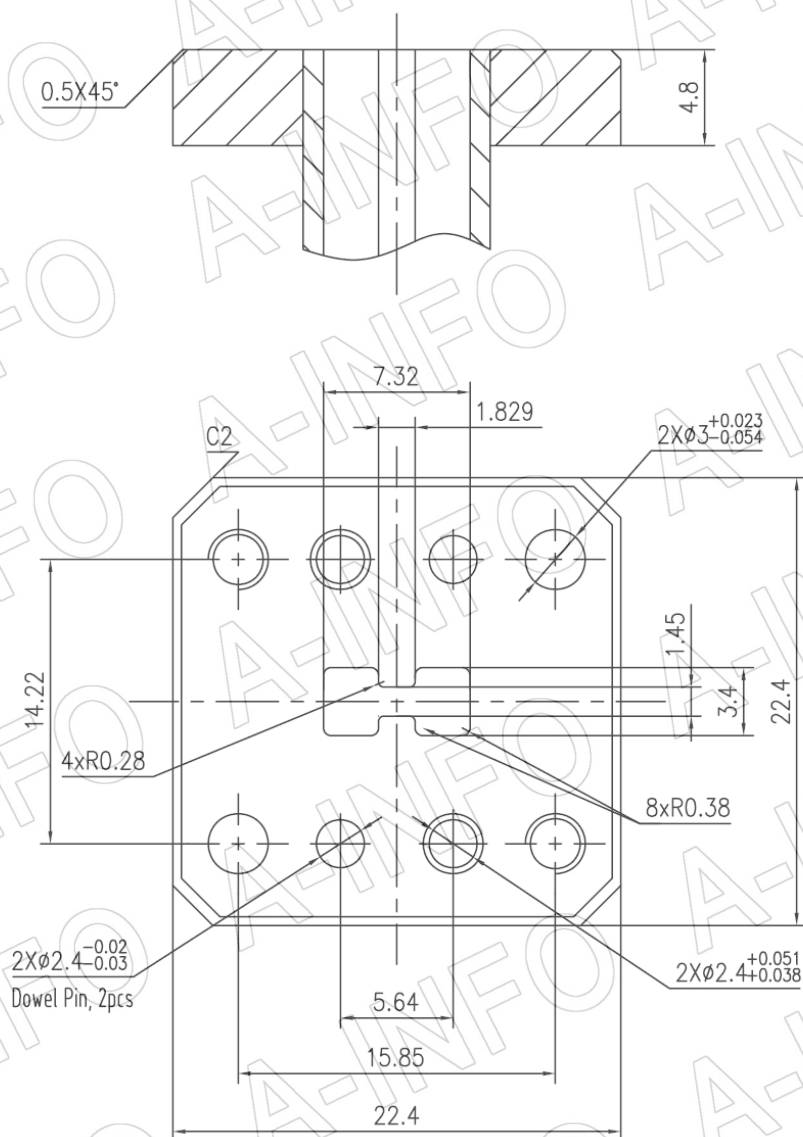
(With two through mounting holes
and two screws holes)

Test Results


1. Gain & Antenna Factor

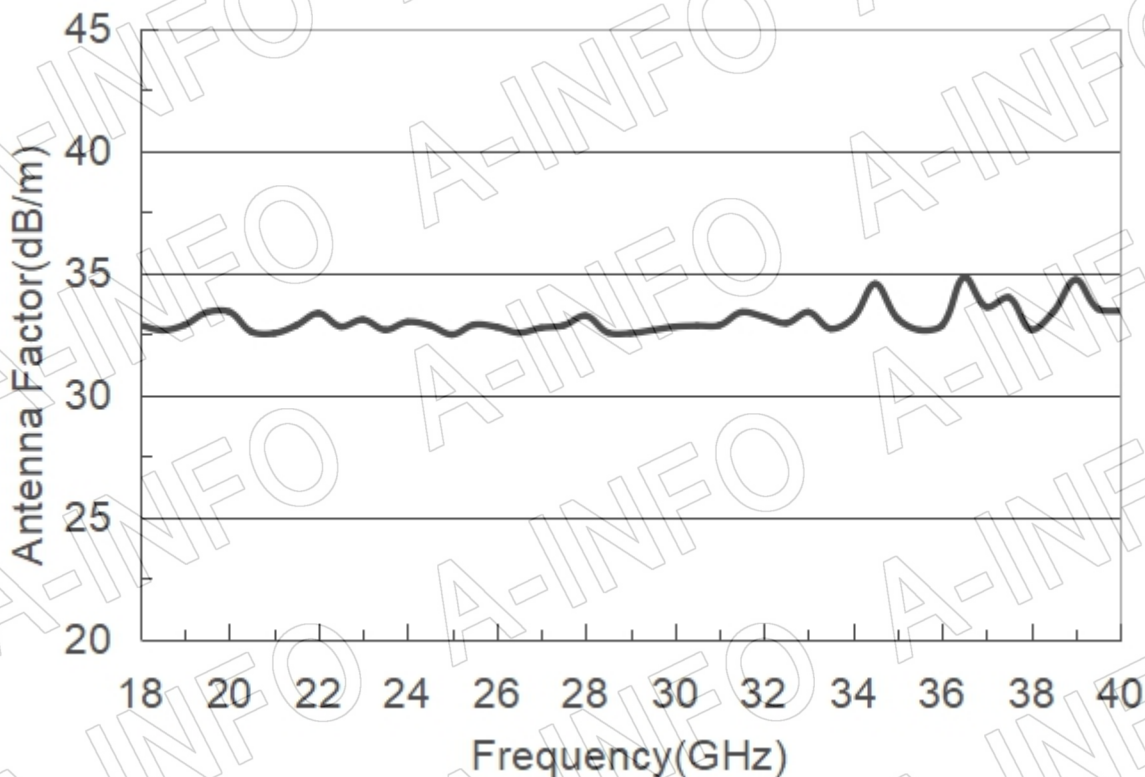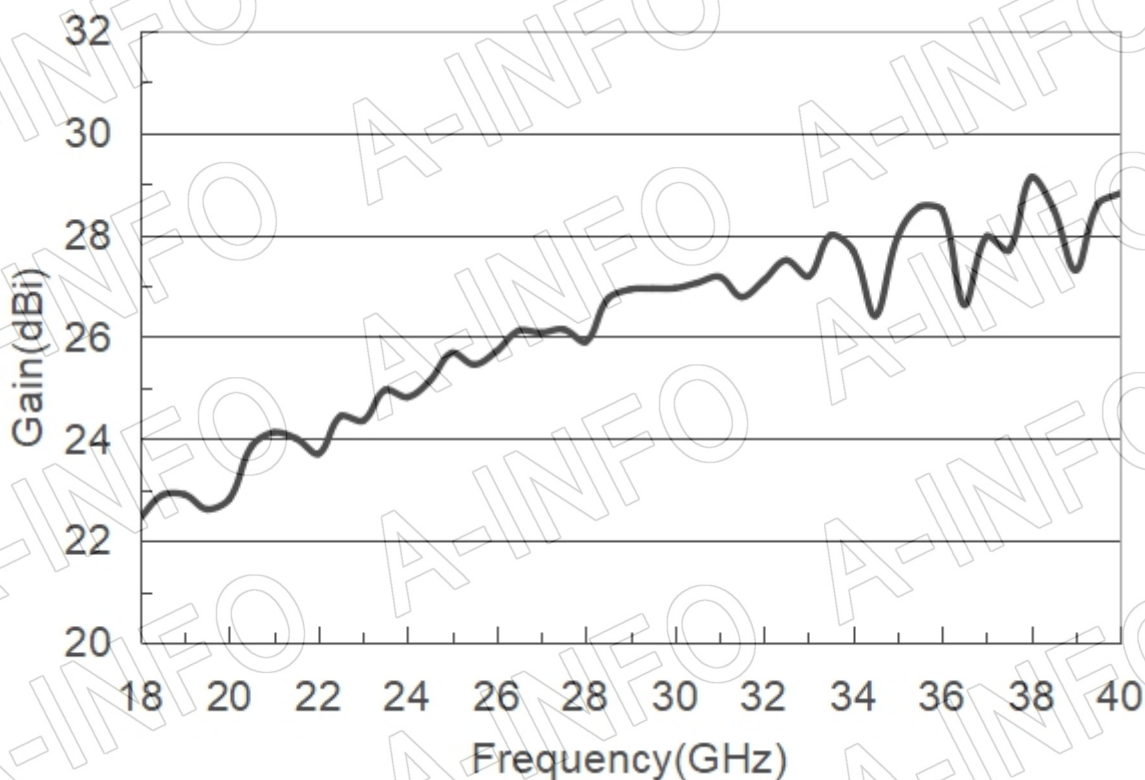


2. Cross Polarization Isolation

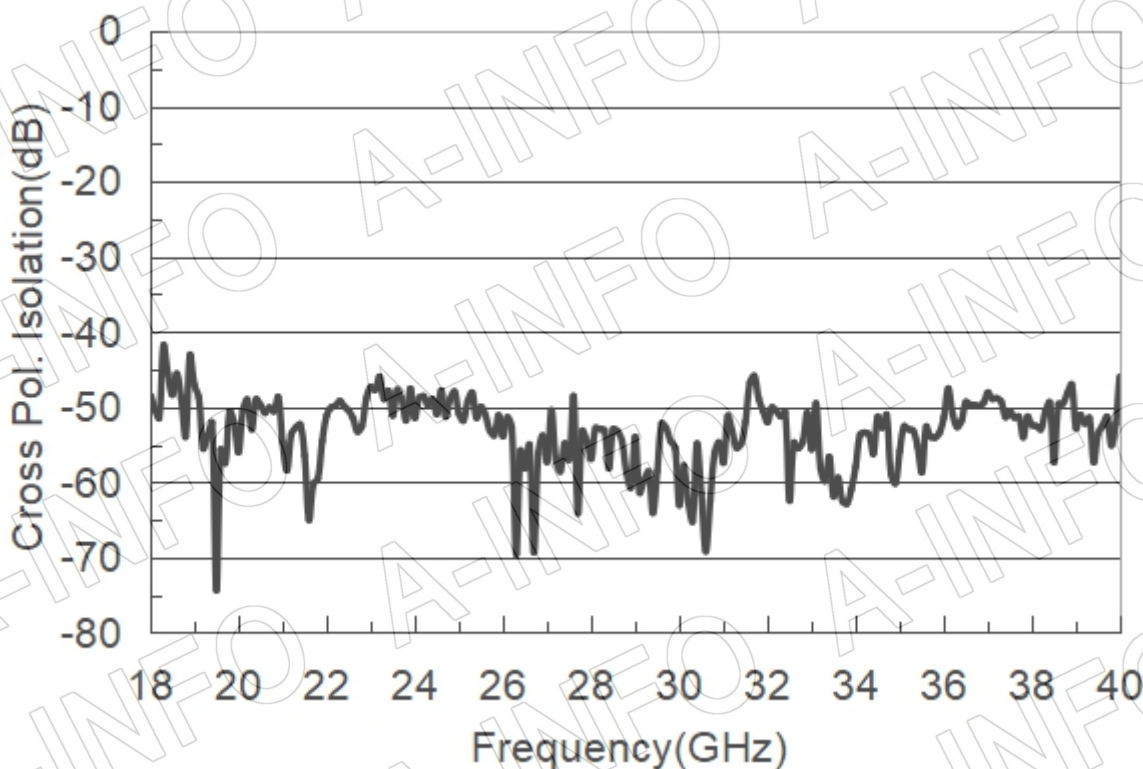


3. VSWR_A Type

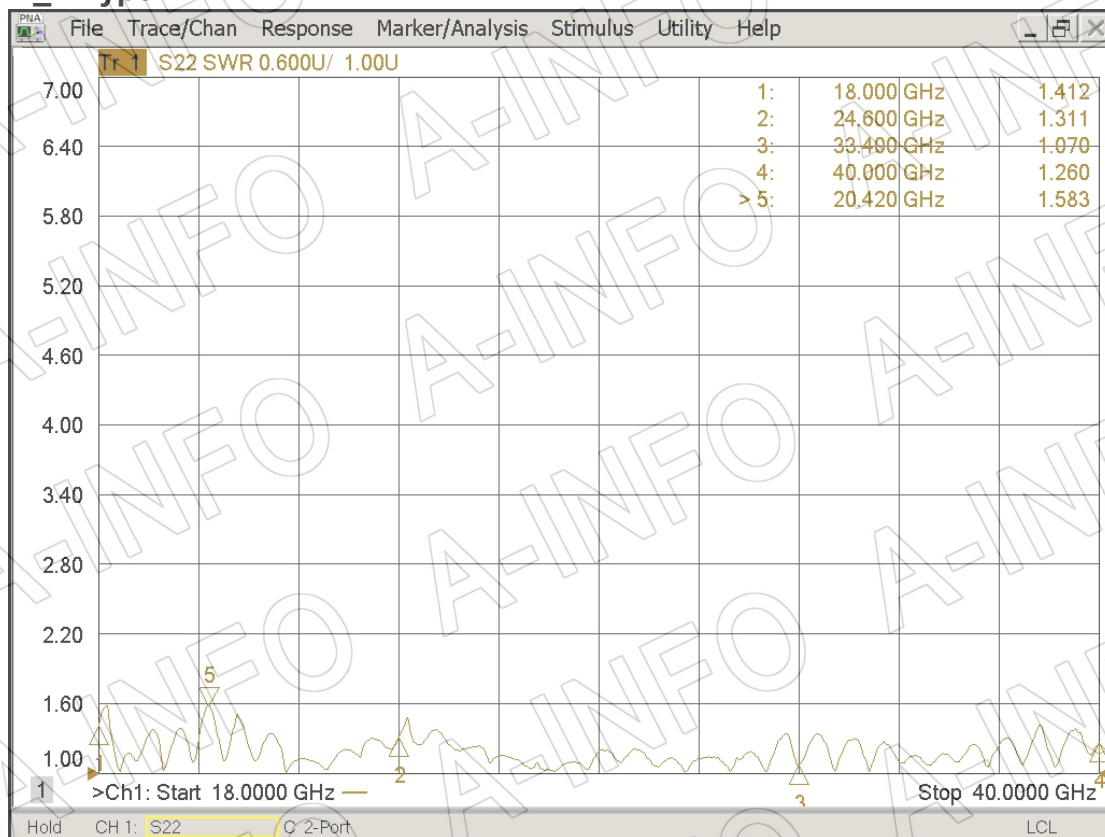

VSWR_C Type

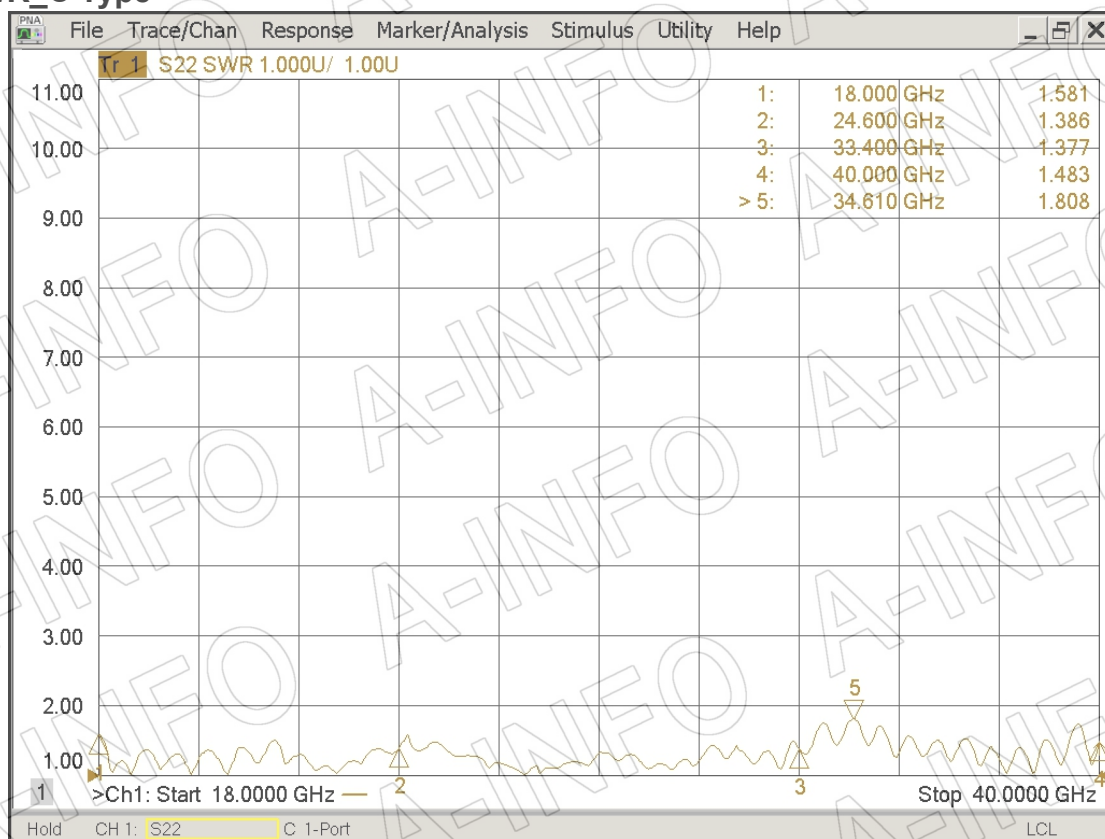

4. Pattern

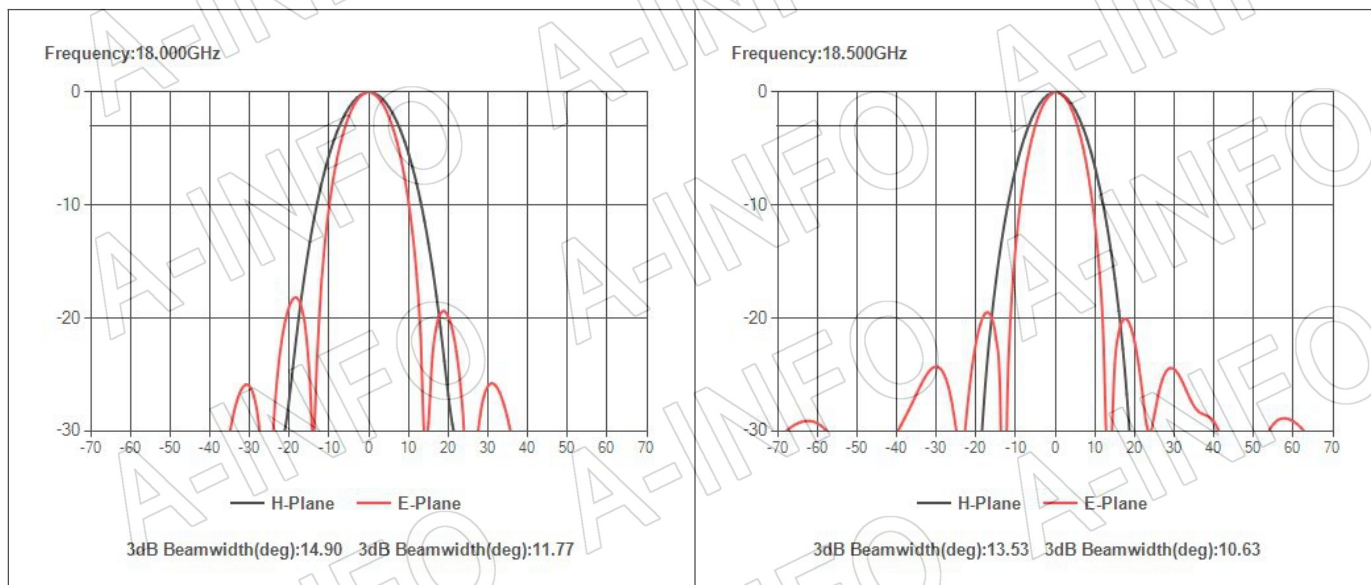

AINFO Inc.

China(Beijing): Tel: (+86) 10-6266-7326,
China(Chengdu): Tel: (+86) 28-8519-2786,
USA: Tel: (+1) 949-639-9688,

Page 6 of 14

(+86) 10-6266-7327 Fax: (+86) 10-6266-7379
(+86) 28-8519-3044 Fax: (+86) 28-8519-3068
(+1) 949-639-9608 Fax: (+1) 949-639-9670

Website: www.ainfoinc.com
Email: sales@ainfoinc.com

