
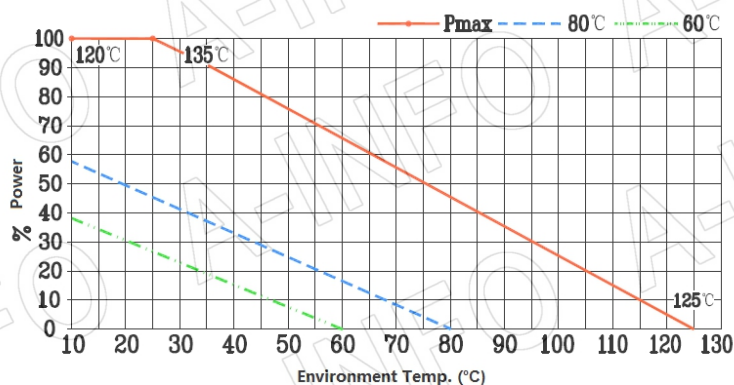


Outline Drawing (Size: mm)

Tolerance: $\pm 1\text{mm}$

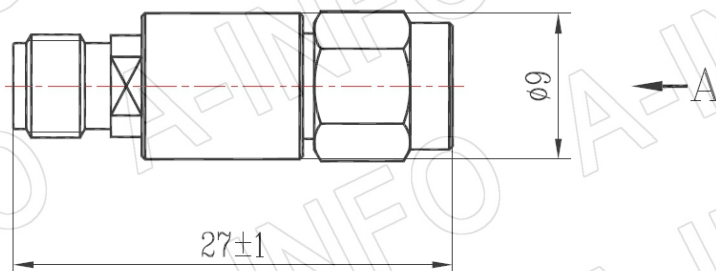

Technical Specification

Power	2W CW Max. @ +25°C
Peak Power	0.2KW Max. (Pulse Width: 5μs Max. ; Duty Cycle: 0.5% Max.)
Attenuation	15dB
Accuracy	$\pm 0.8\text{dB}$
Freq. Range	DC-18GHz
VSWR	1.30 Max.
Impedance	50ohm
Connectors	SMA-Male/SMA-Female
Operating Temp.	-55°C~+125°C

Test Results Table

S/N	VSWR	Attenuation (dB)
002455	1.19	14.86