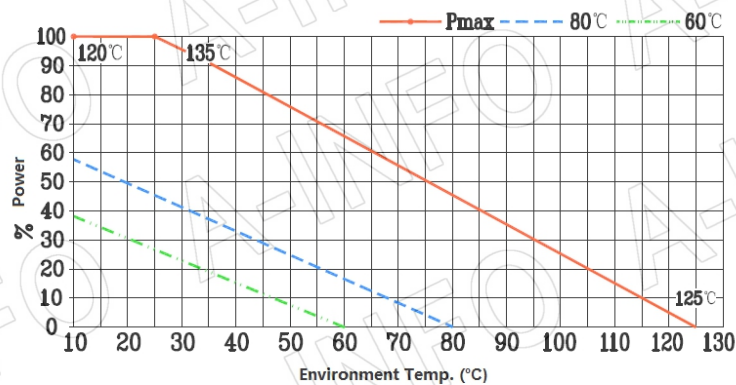
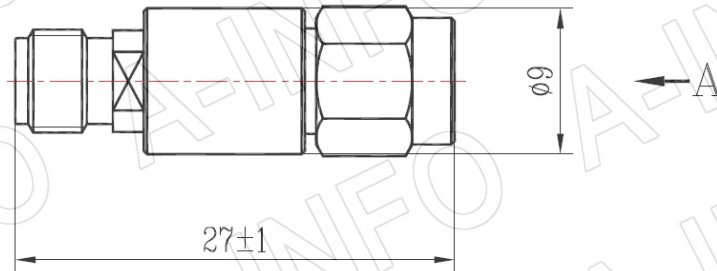


Outline Drawing (Size: mm)

Tolerance: $\pm 1\text{mm}$ 

Technical Specification

Freq. Range	DC-18GHz
Attenuation	3dB
Accuracy	$\pm 0.6\text{dB}$
VSWR	1.3 Max.
Average Power	2W CW Max. @ +25°C
Peak Power	0.2KW Max. (Pulse Width: 5 μs Max.; Duty Cycle: 0.5% Max.)
Impedance	50ohm
Connectors	SMA-Male/SMA-Female
Operating Temp.	-55°C~+125°C

Test Results Table

S/N	VSWR	Attenuation(dB)
002446	1.14	2.96