


Technical Specification


Freq. Range	DC-18GHz
VSWR	1.20:1 Typ. ; 1.30:1 Max.
Insertion Loss	3.76dB Typ. ; 4.14dB Max.
Phase Stability	±7deg
Amplitude Stability	±0.25dB
Impedance	50Ohm
Connector	N-Male/N-Male
Connector Body Material	Passivated Stainless Steel
Operating Temp.	-40~+85°C
Storage Temp.	-40~+85°C
Length	2000mm Approx.
Outer Diameter	3.6mm
Minimum Bending Radius	36mm

Test Results


Phase Stability & Amplitude Stability

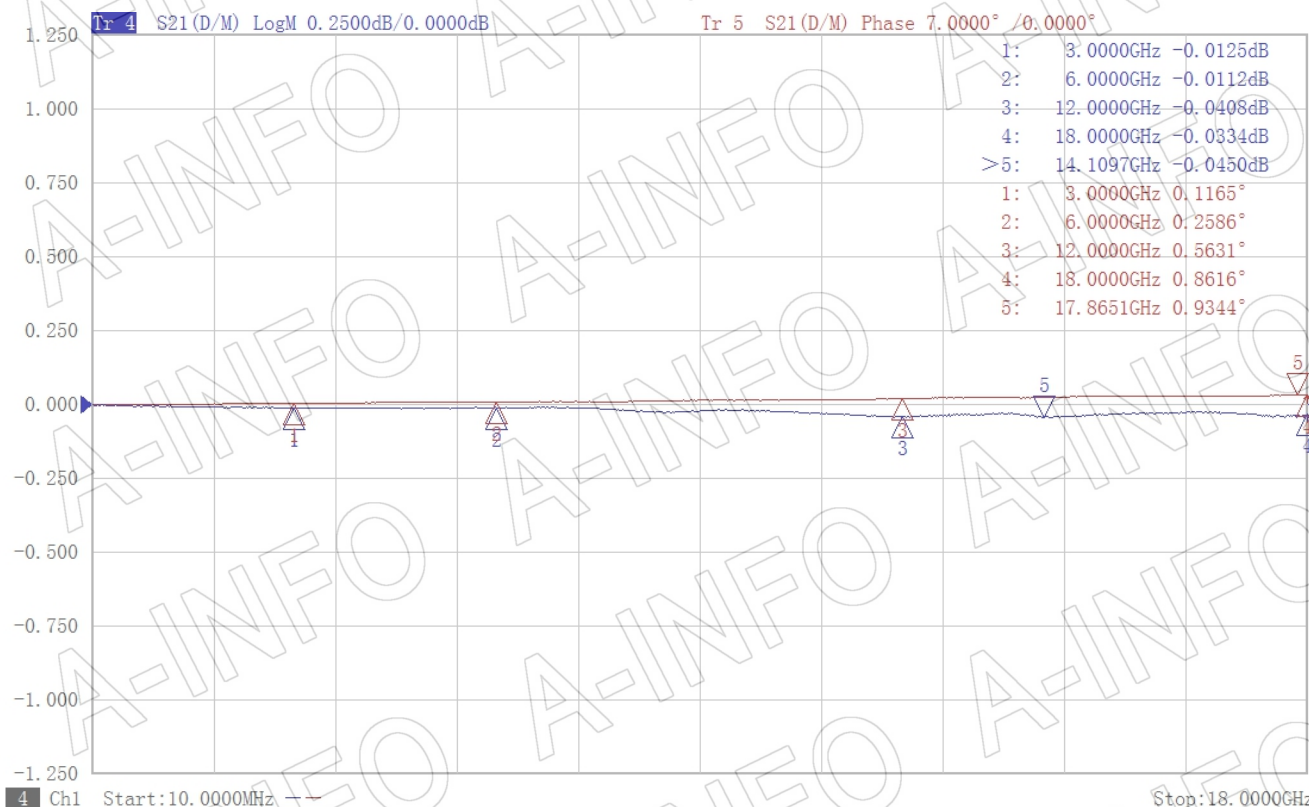

Insertion Loss

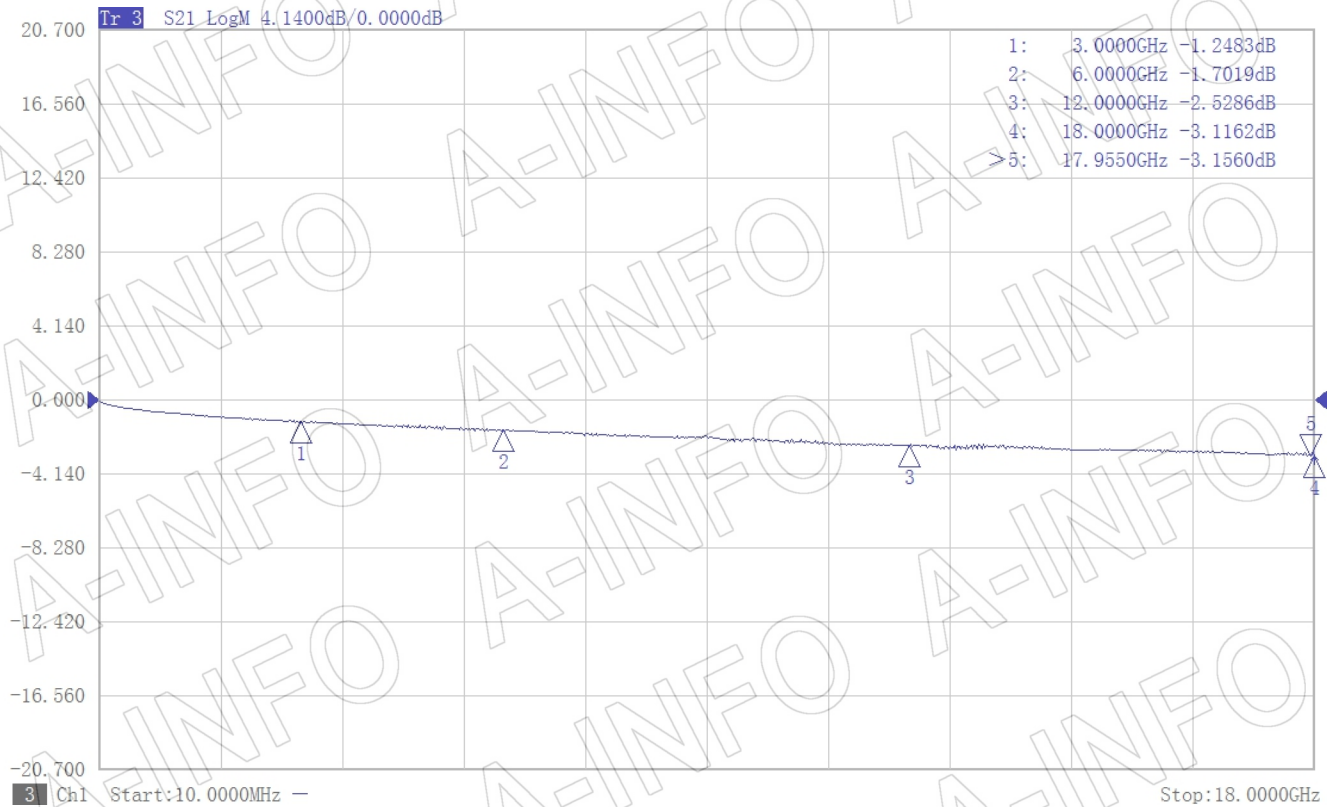

VSWR1

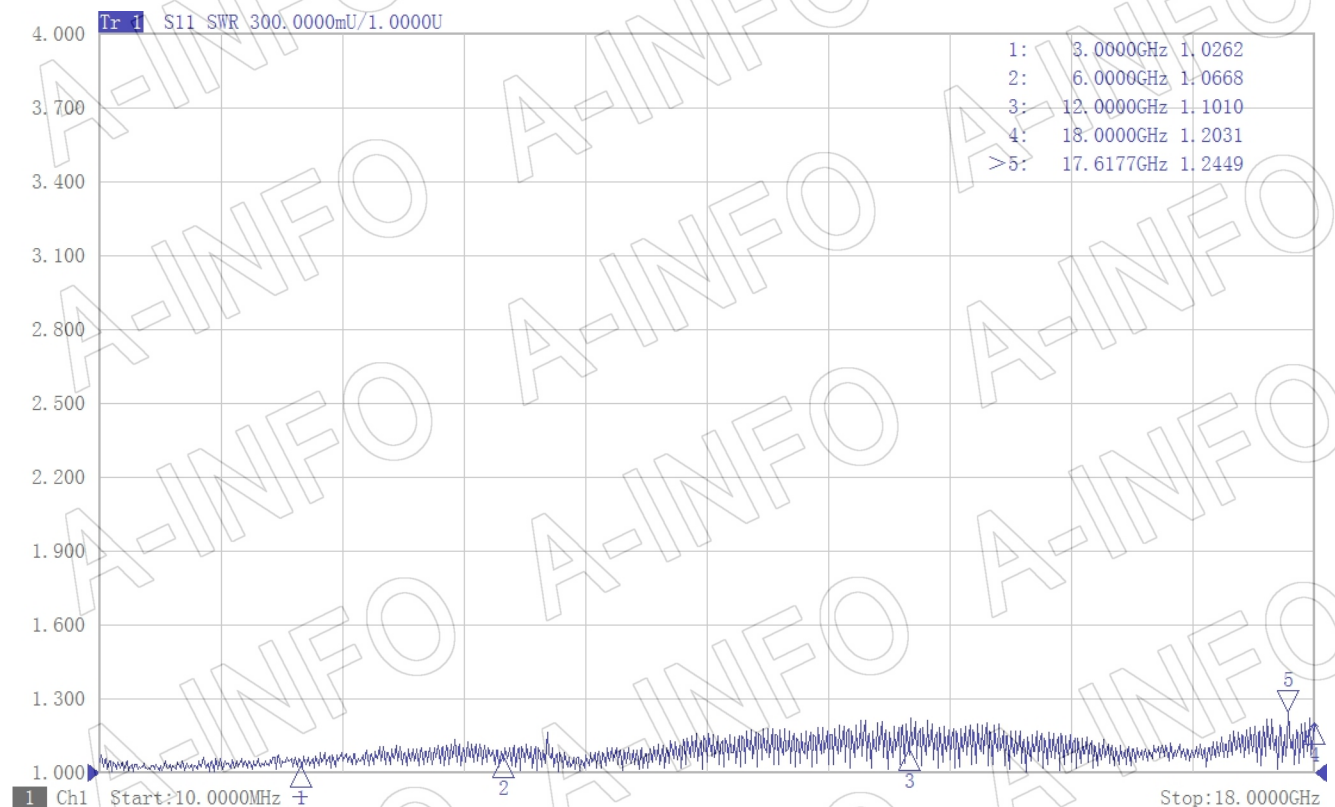

VSWR2

