



For reference only. See data sheet for the detailed specifications.

Technical Specification

229EWGEN



229EWGEN-A1






Frequency Range(GHz)	3.3 - 4.9
Waveguide	WR229
Gain(dBi)	5 Typ.
Polarization	Linear
3dB Beamwidth(deg)	E Plane: 91 Typ.
	H Plane: 63 Typ.
Cross Pol. Isolation(dB)	30 Typ.
VSWR	2.0:1 Typ.
Output	Endlaunch N-Female or Endlaunch SMA-Female
Material	Al
Finish	Chemical Conversion Coating, Gray Paint
Size(mm)	229EWGEx: 134.9 x 134.9 x 411.5
	229EWGEx-A1: 480 x 480 x 411.5
Net Weight(Kg)	229EWGEx: 0.70 Around
	229EWGEx-A1: 2.80 Around

Outline Drawing (Size: mm)


Endlaunch N-Female Output (P/N: 229EWGEN)

For Endlaunch SMA-Female output outline drawing, please contact A-INFO.

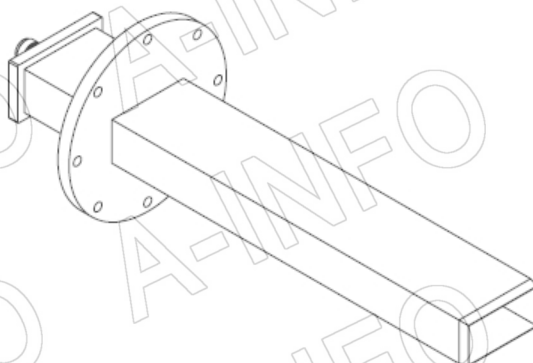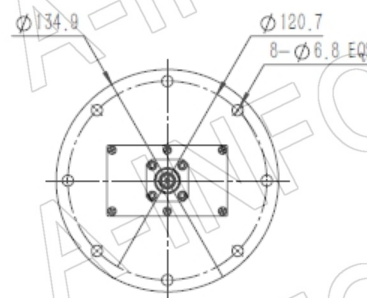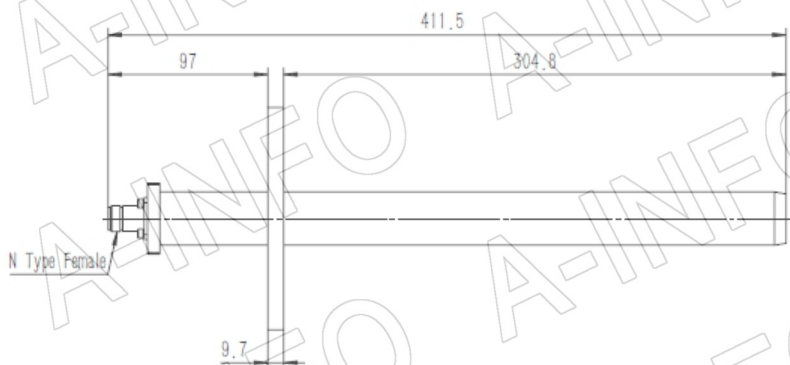


Endlaunch N-Female Output with Round Mounting Bracket & (Option, P/N: EWG-MB20)

For Endlaunch SMA-Female output outline drawing, please contact A-INFO.

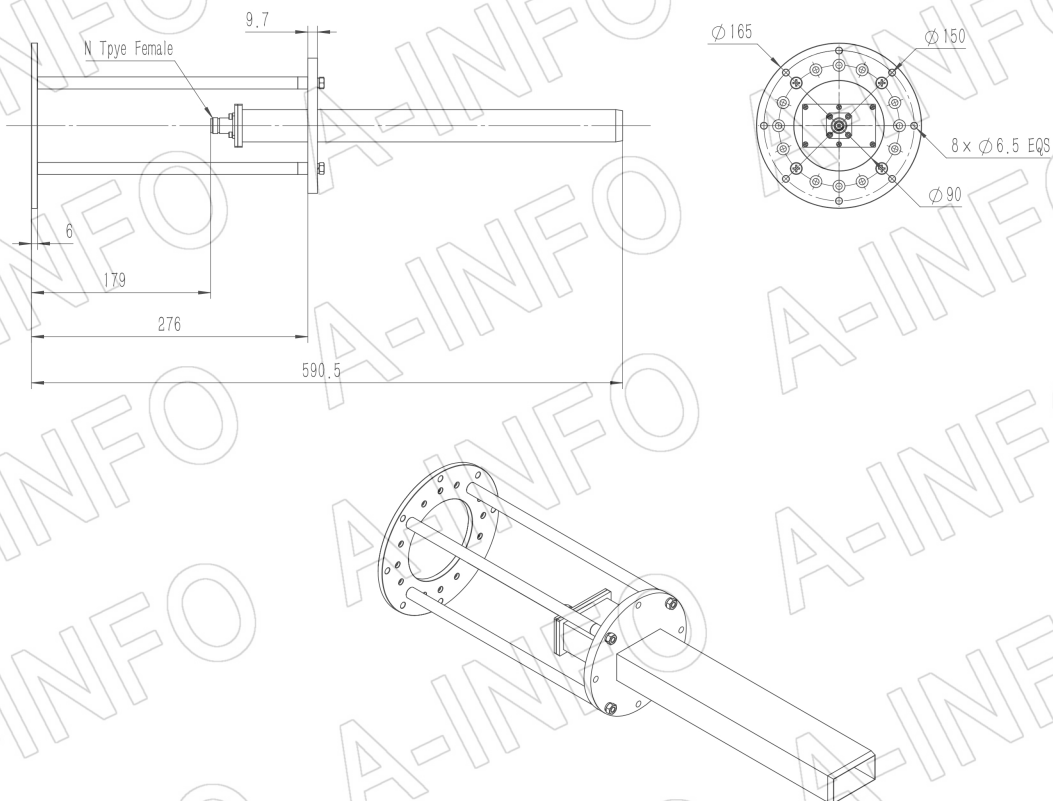


Endlaunch N-Female Output, Equipped with Absorber (Option, P/N: 229EWGEN-A1)

For Endlaunch SMA-Female output outline drawing, please contact A-INFO.

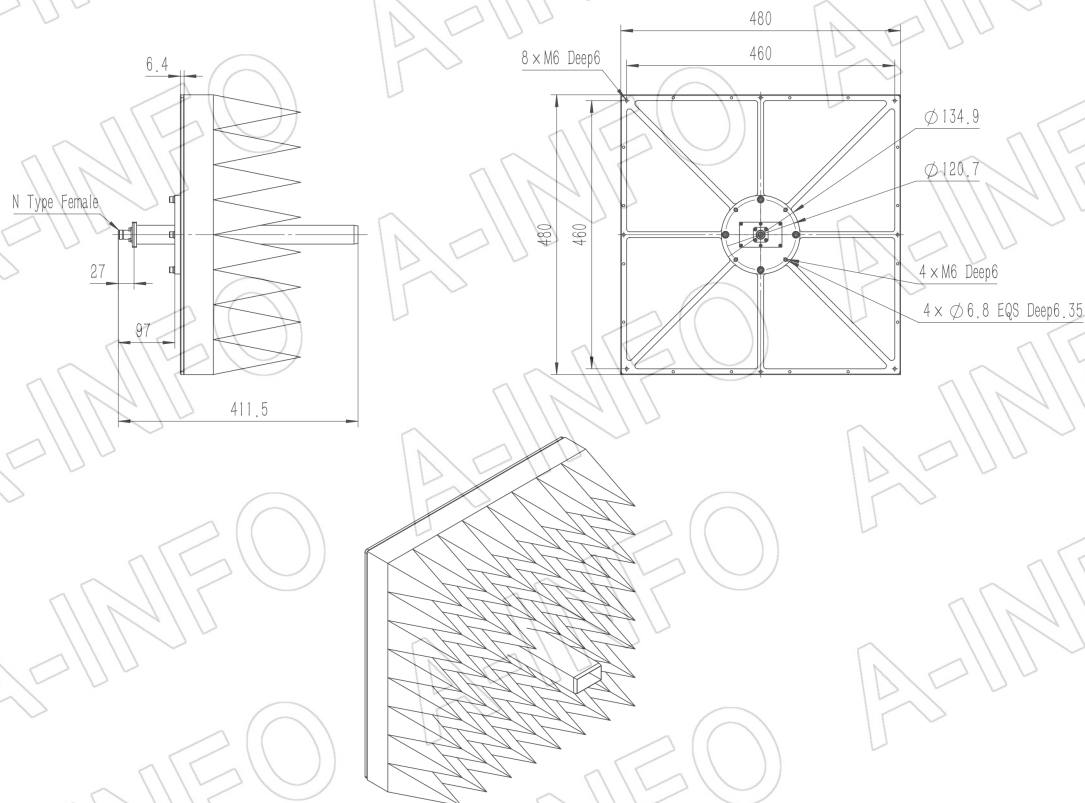

Endlaunch N-Female Output with Round Mounting Bracket & Equipped with Absorber (Option, P/N: EWG-MB20 & 229EWGEN-A1)

For Endlaunch SMA-Female output outline drawing, please contact A-INFO.

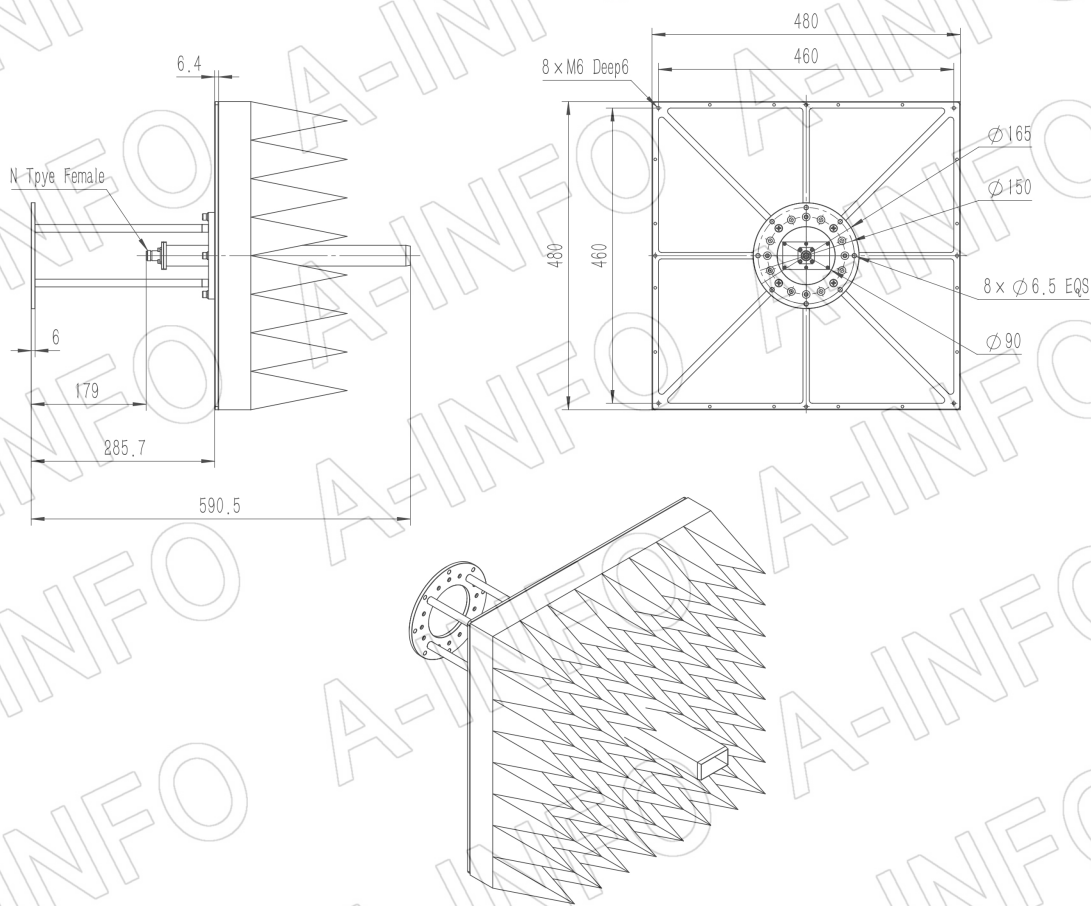

Test Results

VSWR

