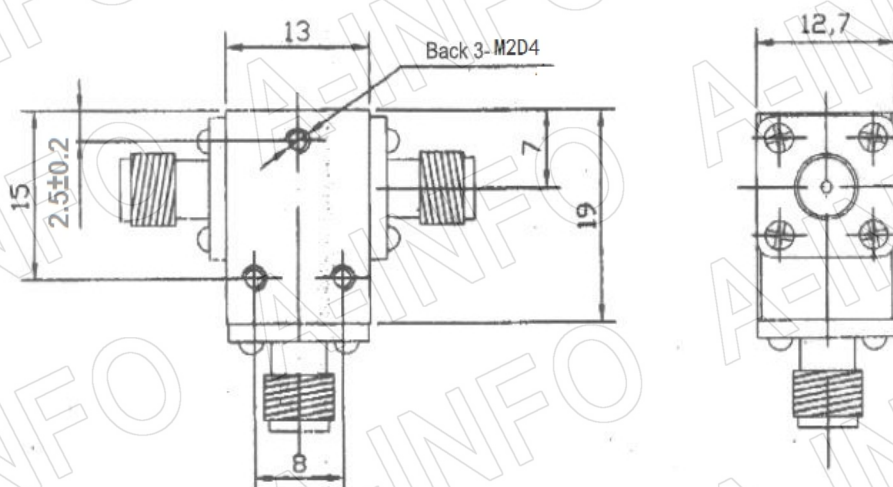


Outline Drawing (Size: mm)

Tolerance: $\pm 1\text{mm}$ 

Technical Specification

Freq. Range	8.0 – 12.0GHz
VSWR	1.35 Max.
Insertion Loss	0.55dB Max.
Isolation	17dB Min.
Forward Power	20W
Reverse Power	10W
Connector	SMA-Female
Operating Temp.	+10°C~+60°C

Test Results

S/N	Insertion Loss(dB)			Isolation(dB)			VSWR		
	1-2	2-3	3-1	1-2	2-3	3-1	1-2	2-3	3-1
001337	0.37	0.29	0.38	21.68	23.15	23.60	1.23	1.21	1.22