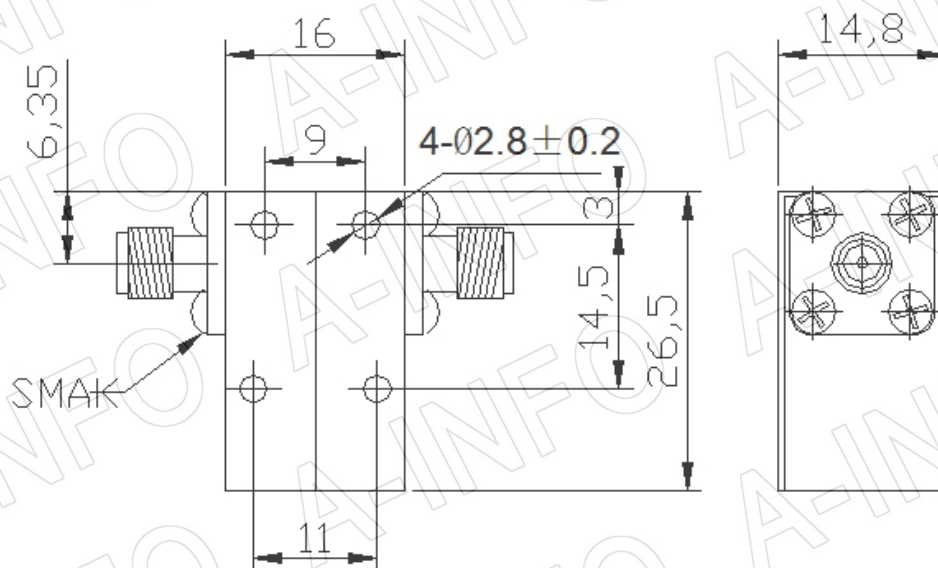


Outline Drawing (Size: mm)**Tolerance: $\pm 0.5\text{mm}$** **Technical Specification**

Freq. Range	3.4 – 4.2GHz
VSWR	1.25:1Max.
Insertion Loss	0.5B Max.
Isolation	20dB Min.
Forward Power	10W
Reverse Power	10W
Connector	SMA-Female
Operating Temp.	-40°C~+70°C
ROHS Compliance	Yes

Test Results Table

S/N	Insertion Loss(dB)	Isolation(dB)	VSWR
006814	0.49	26.86	1.20