


Technical Specification


Frequency Range	DC-18GHz
Insertion Loss	1.10dB Typ. ; 1.21dB Max.
VSWR	1.20:1 Typ. ; 1.30:1 Max.
Phase Stability	±12deg
Amplitude Stability	±0.150dB
Impedance	50Ohm
Connector	SMA-Male/SMA-Male
Connector Body Material	Passivated Stainless Steel
Operating Temp.	-40~+85°C
Storage Temp.	-40~+85°C
Length	1000mm Approx.
Outer Diameter	7.8mm
Minimum Bending Radius	80mm

Test Results


Phase Stability & Amplitude Stability

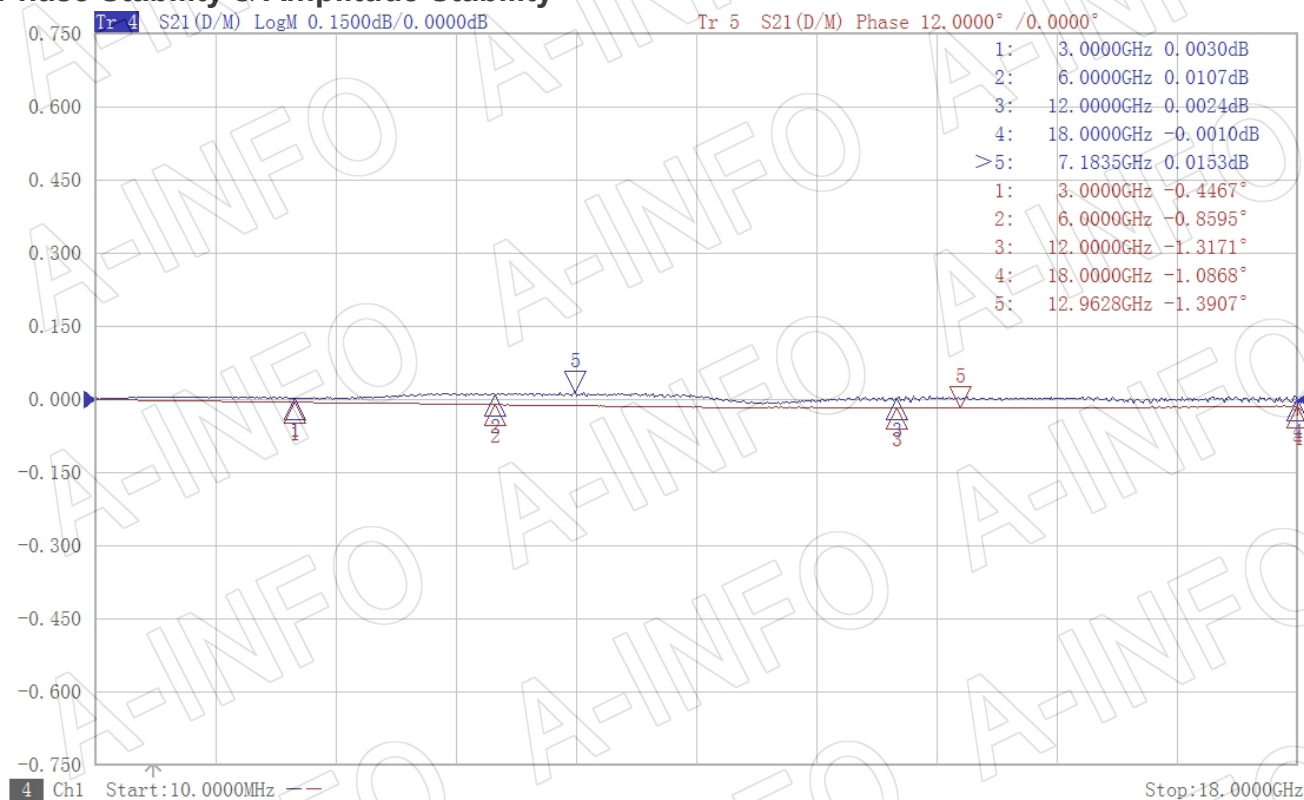

Insertion Loss

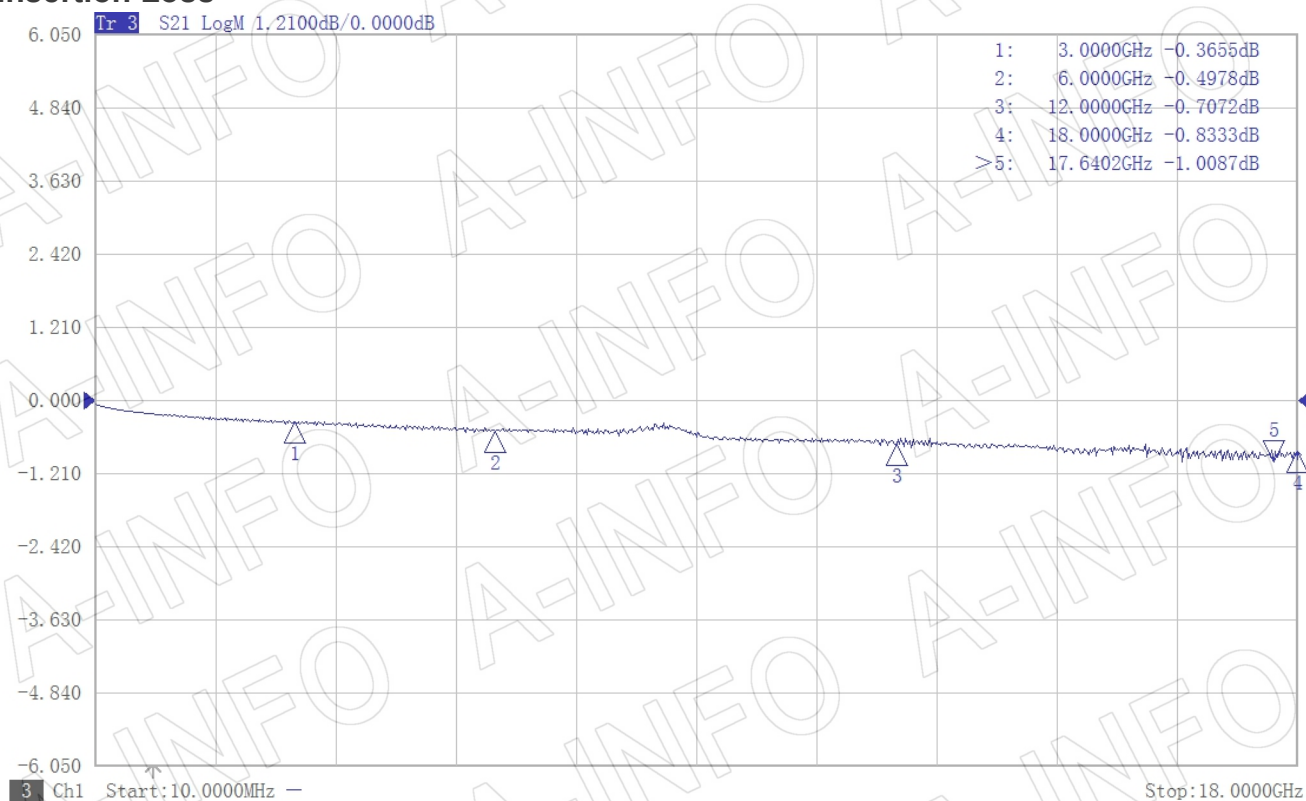

VSWR1

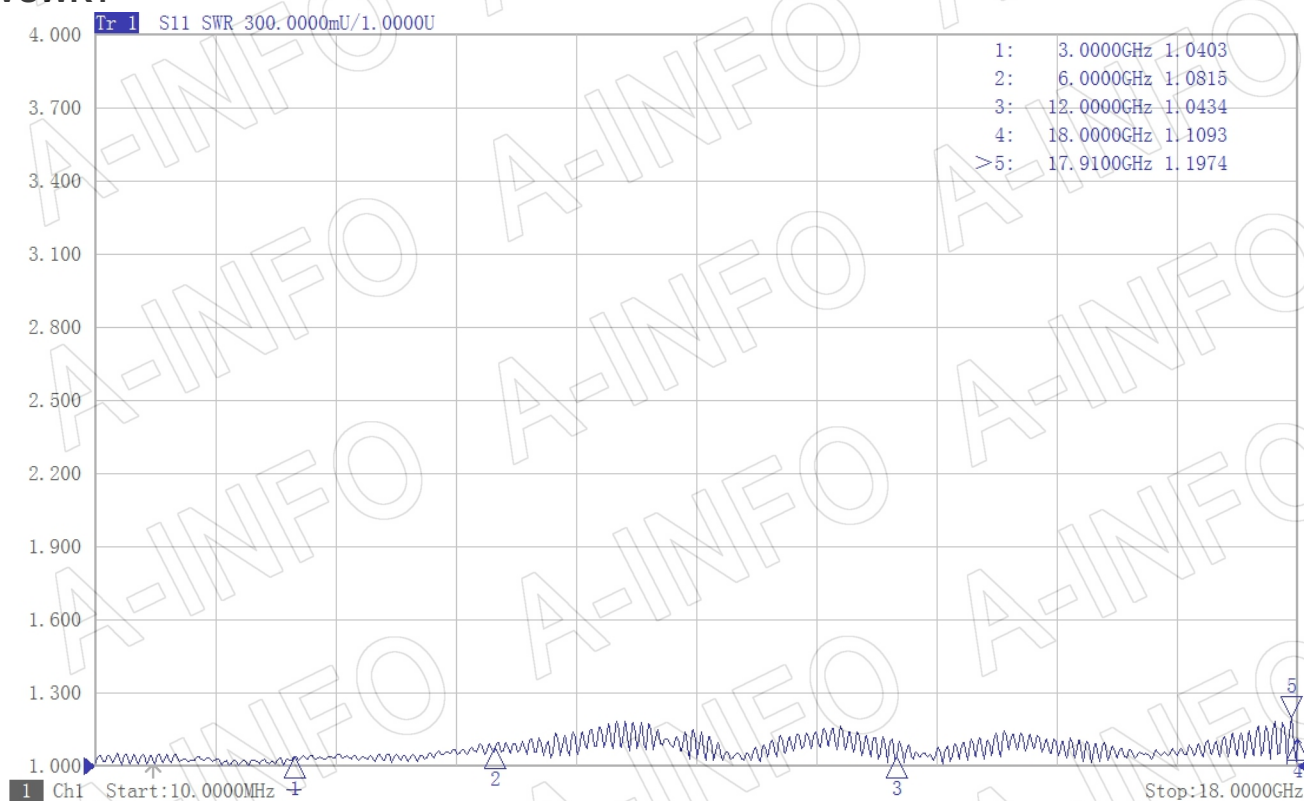

VSWR2

