
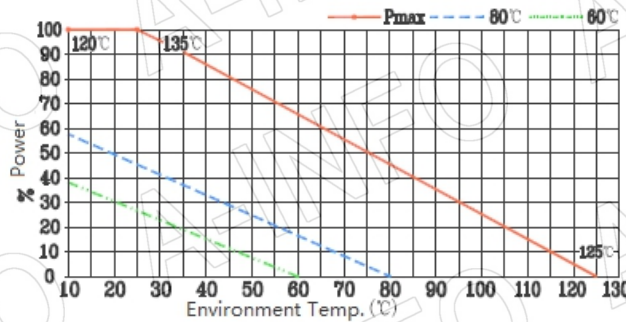


Outline Drawing (Size: mm)

Tolerance: $\pm 2\text{mm}$

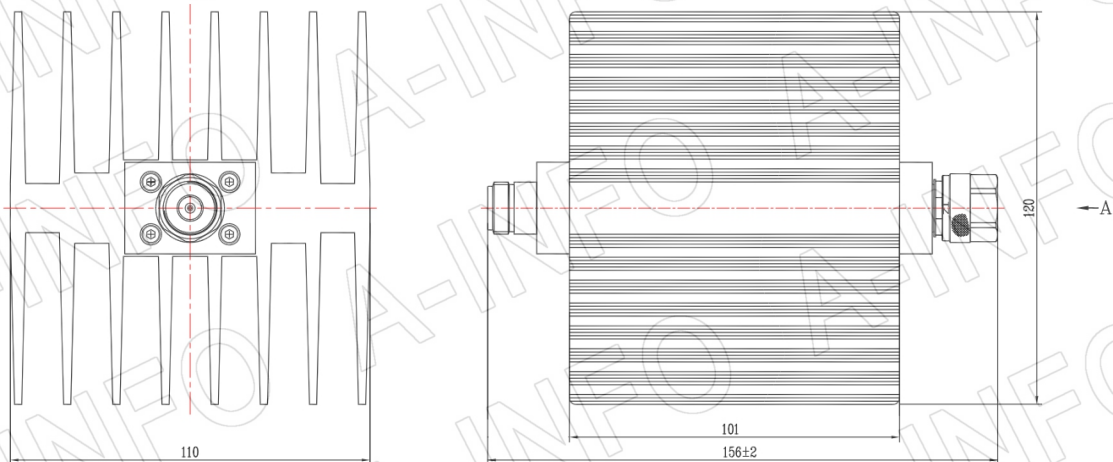

Technical Specification

Power	100W CW Max. @ +25°C
Peak Power	5KW Max. (Duty Cycle:1% Max.;Pulse Width:5μs Max.)
Attenuation	30dB
Accuracy	$\pm 0.9\text{dB}$
Freq. Range	DC-6GHz
Resistance	50ohm
VSWR	1.25 Max.
Connector	N-Male/N-Female
Note	Forced air cooling is required.

Test Results Table

S/N	VSWR	Attenuation(dB)
003090	1.09	29.69