




For reference only. See data sheet for the detailed specifications.

Technical Specification

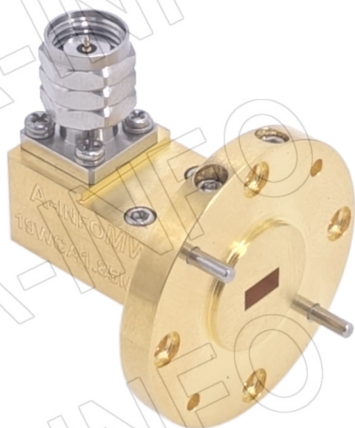


EIA WR	WR19
Frequency Range(GHz)	40.0 – 60.0
Insertion Loss(dB)	0.8 Max.
VSWR	1.50:1 Max.
Flange	FUGP500(UG-383/U-M)
Connector	1.85mm-Male
Average Power(W CW)	5 Max.
Peak Power(KW)	0.01
Material	Cu
Finish	Gold Plated
Size(mm)	26 x 28.6 x 32.7
Net Weight(Kg)	0.05 Around

Outline Drawing (Size: mm)

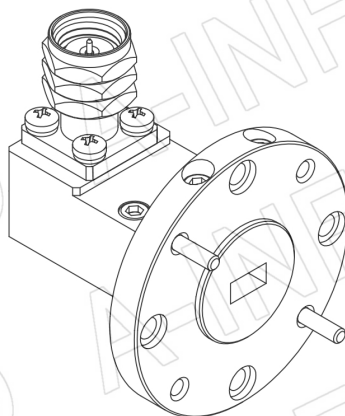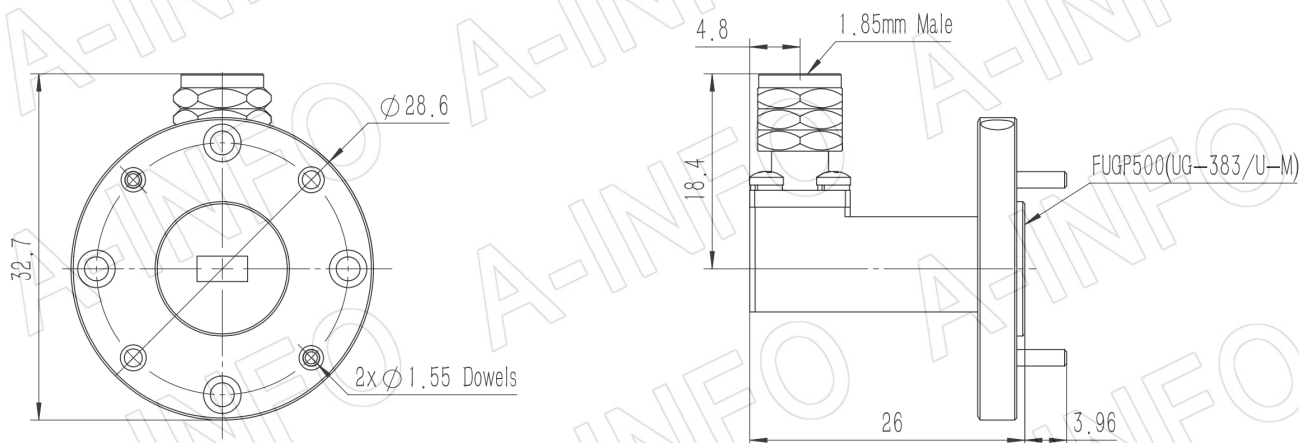


Flange Drawing (Size: mm)

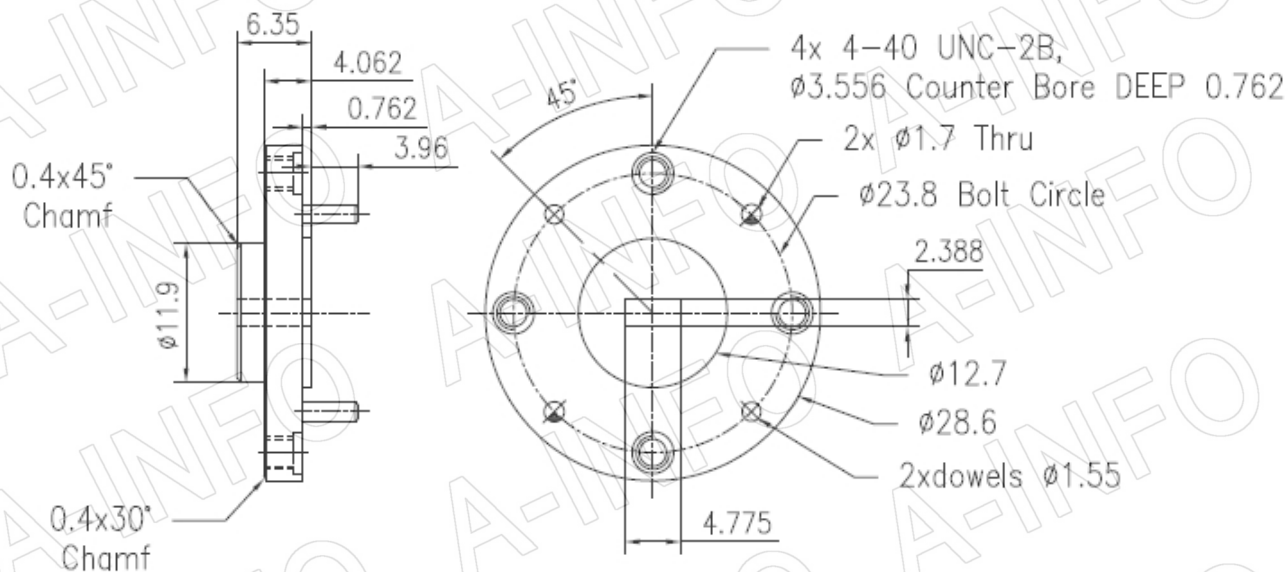

FUGP500
(equivalent to UG-383/U-M)

Test results

I.L. (Test with two adapters back to back)

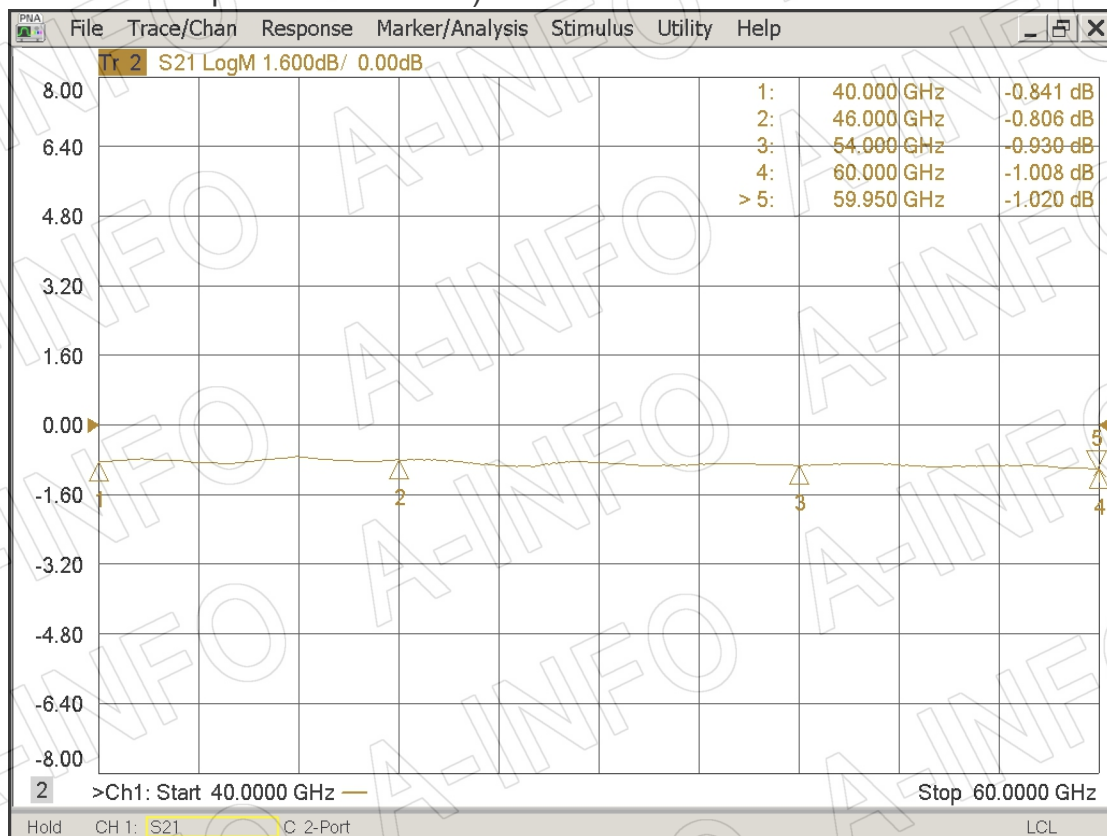

VSWR

