


Outline Drawing (Size: mm)

Tolerance: $\pm 0.5\text{mm}$

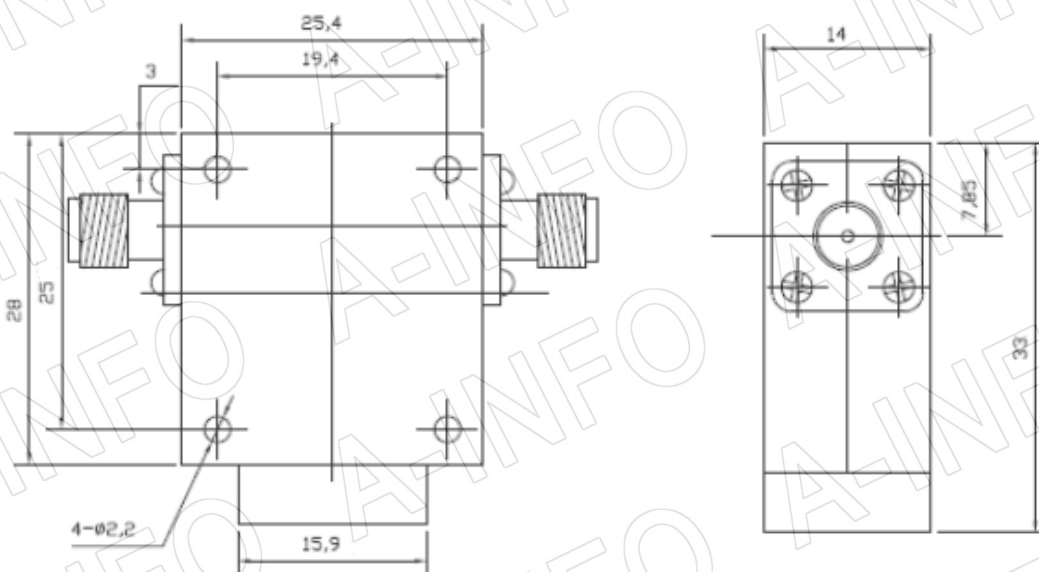

Technical Specification

Freq. Range	3-6GHz
Insertion Loss	0.6dB Max.
Isolation	18dB Min.
VSWR	1.35 Max.
Forward Power	100W Max.
Reverse Power	20W Max.
Connector	SMA-Female
Operating Temp.	+10°C~+45°C

Test Results Table

S/N	Insertion Loss(dB)	Isolation(dB)	VSWR
008714	0.24	18.59	1.16