






For reference only. See data sheet for the detailed specifications.

Technical Specification

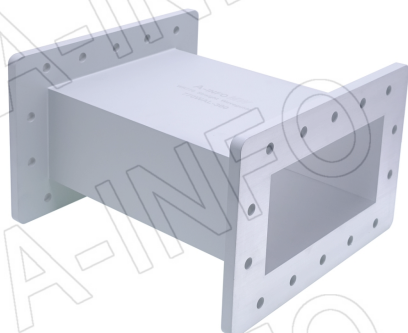

EIA WR	WR770
Frequency Range(GHz)	0.96 - 1.45
Length(mm)	300
Insertion Loss(dB)	0.1 Max.
VSWR	1.05:1 Max.
Flange	FDP12(UDR12)
Material	Al
Finish	Chemical Conversion Coating, Gray Paint
Size(mm)	300 x 285 x 187.4
Net Weight(Kg)	3.50 Around

Outline Drawing (Size: mm)

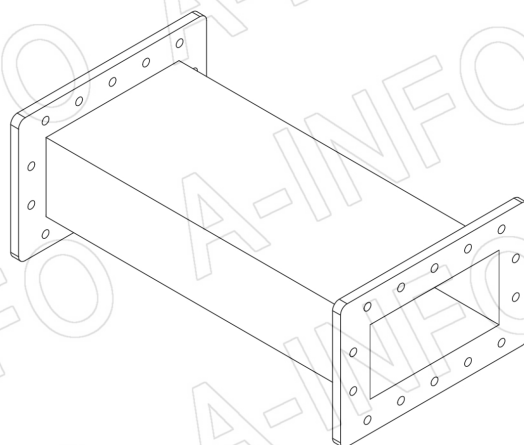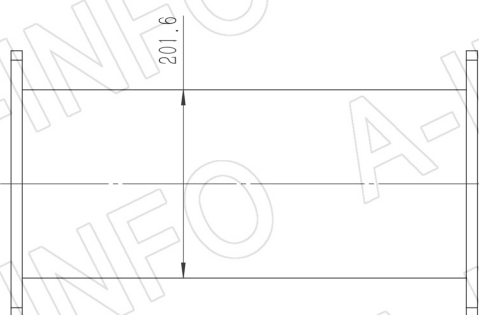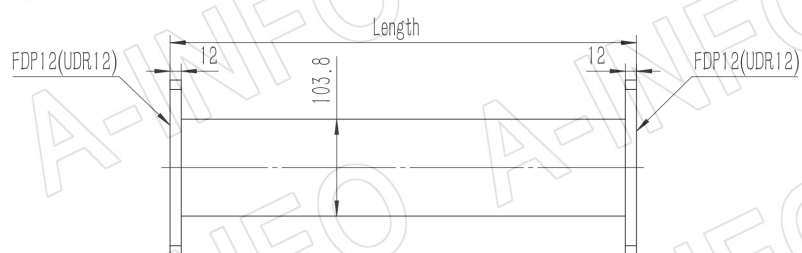

Technical drawing of a mechanical part, showing a side view and a top view.

Side View (Top):

- Flange thickness: 12
- Central hole diameter: 12


Top View (Bottom):

- Overall width: 187.4
- Overall height: 123.19
- Distance between hole columns: 97.79
- Distance between first and last hole in each column: 101.6
- Distance between first and second hole in each column: 50.8
- Distance from center to first hole in each column: 74.3
- Distance from center to last hole in each column: 25.4
- Hole diameter: 14x $\varnothing 10.4$

Data subject to change without notice. For current data sheets, please contact: Sales@ainfoinc.com

Test Results

I.L.

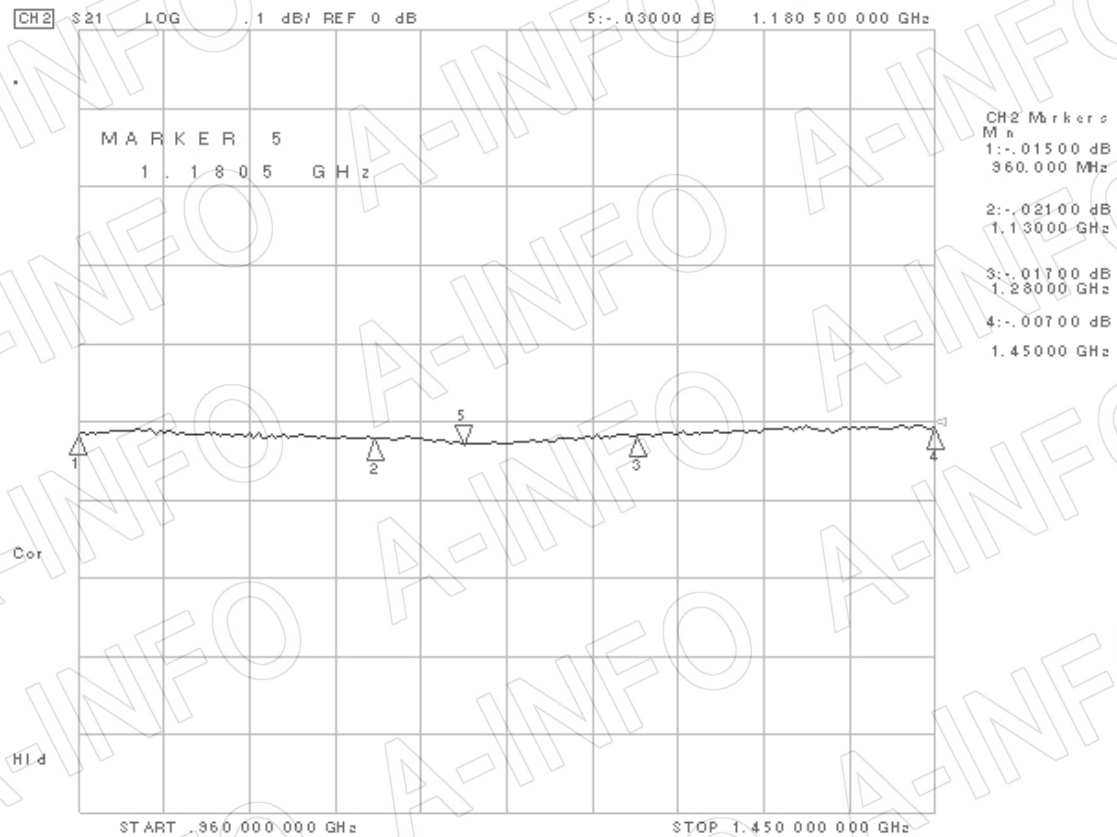

VSWR

