


For reference only. See data sheet for the detailed specifications.

Technical Specification


Freq. Range	DC-18GHz
Insertion Loss	13.85dB Typ. ; 14.35dB Max.
VSWR	1.25:1 Typ. ; 1.35:1 Max.
Phase Stability	±12deg
Amplitude Stability	±0.15dB
Impedance	50Ohm
Connector	N-Male/N-Male
Connector Body Material	Passivated Stainless Steel
Operating Temp.	-40~+85°C
Storage Temp.	-40~+85°C
Length	20000mm approx.
Outer Diameter	7.8mm
Minimum Bending Radius	80mm

Test Results


Phase Stability & Amplitude Stability

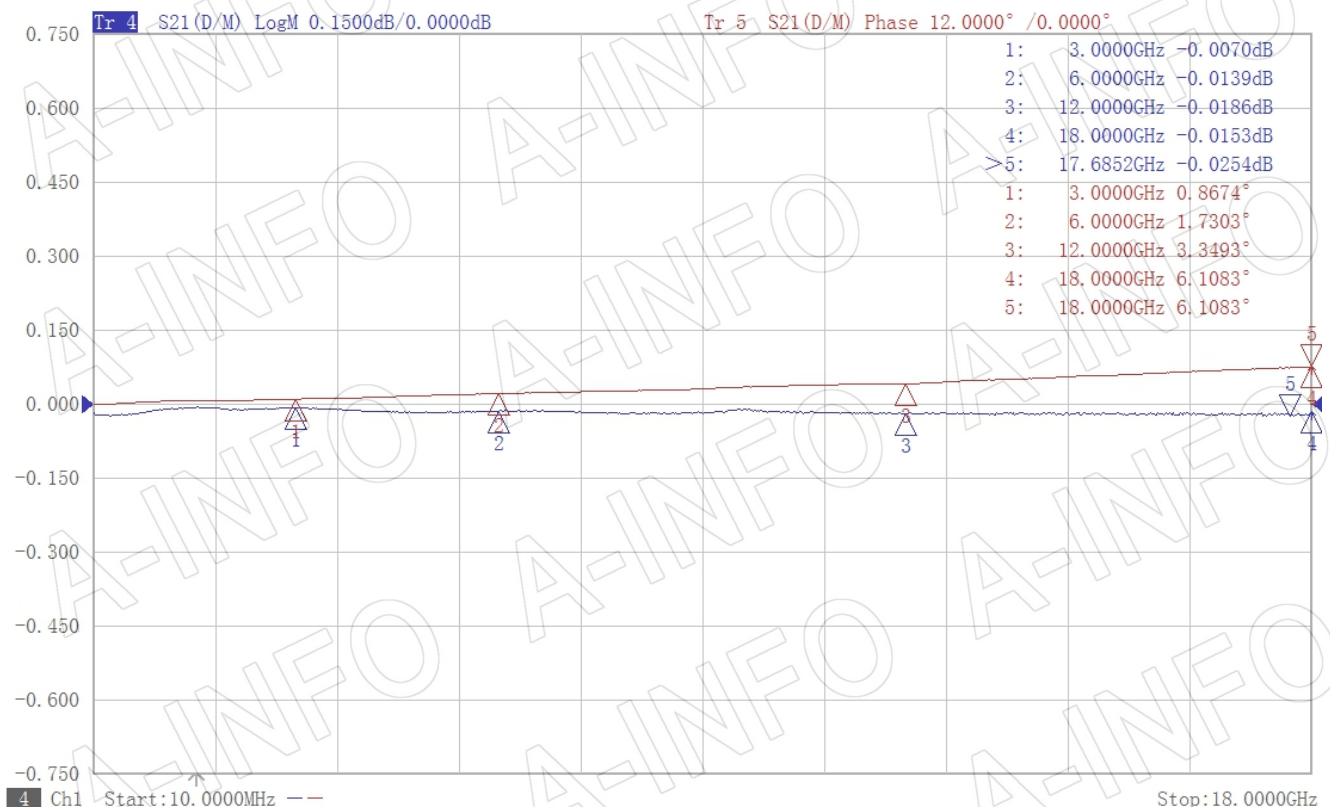

Insertion Loss

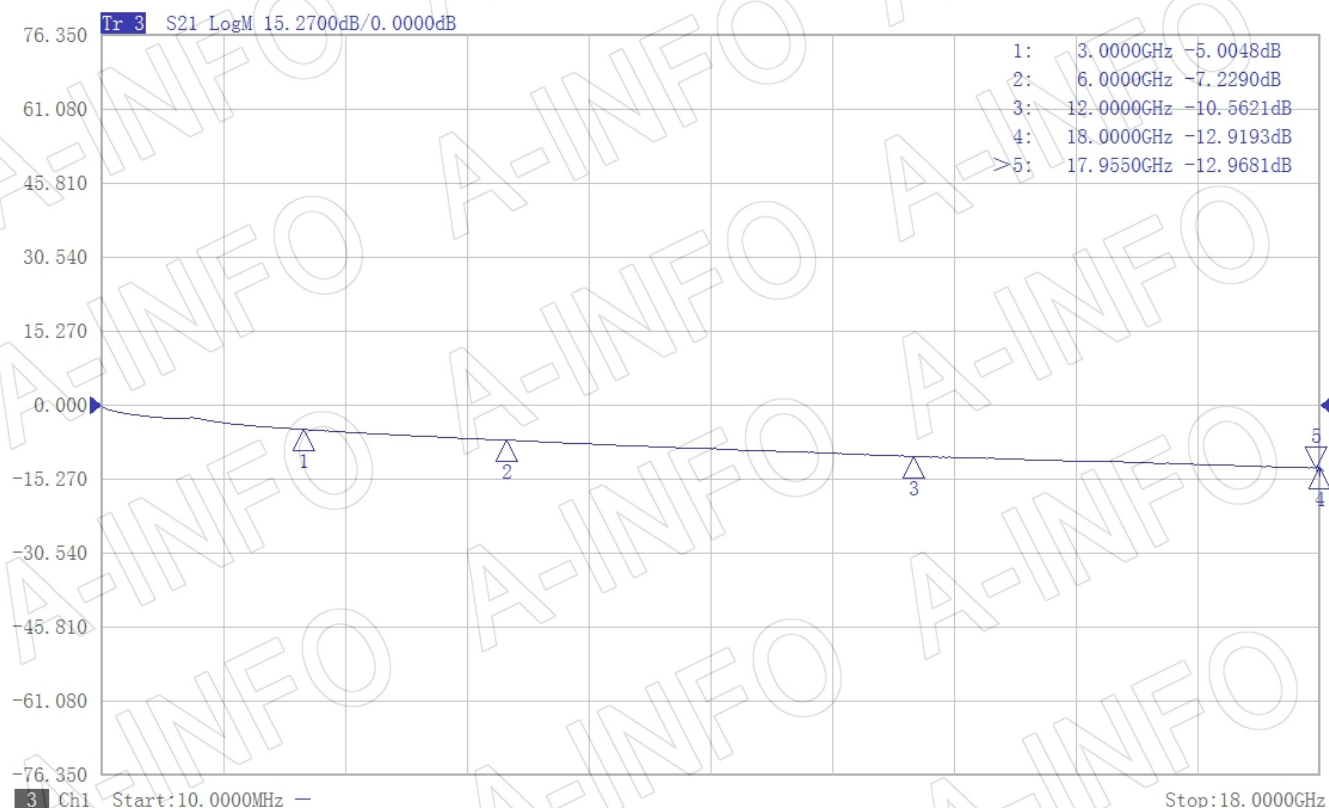

VSWR1

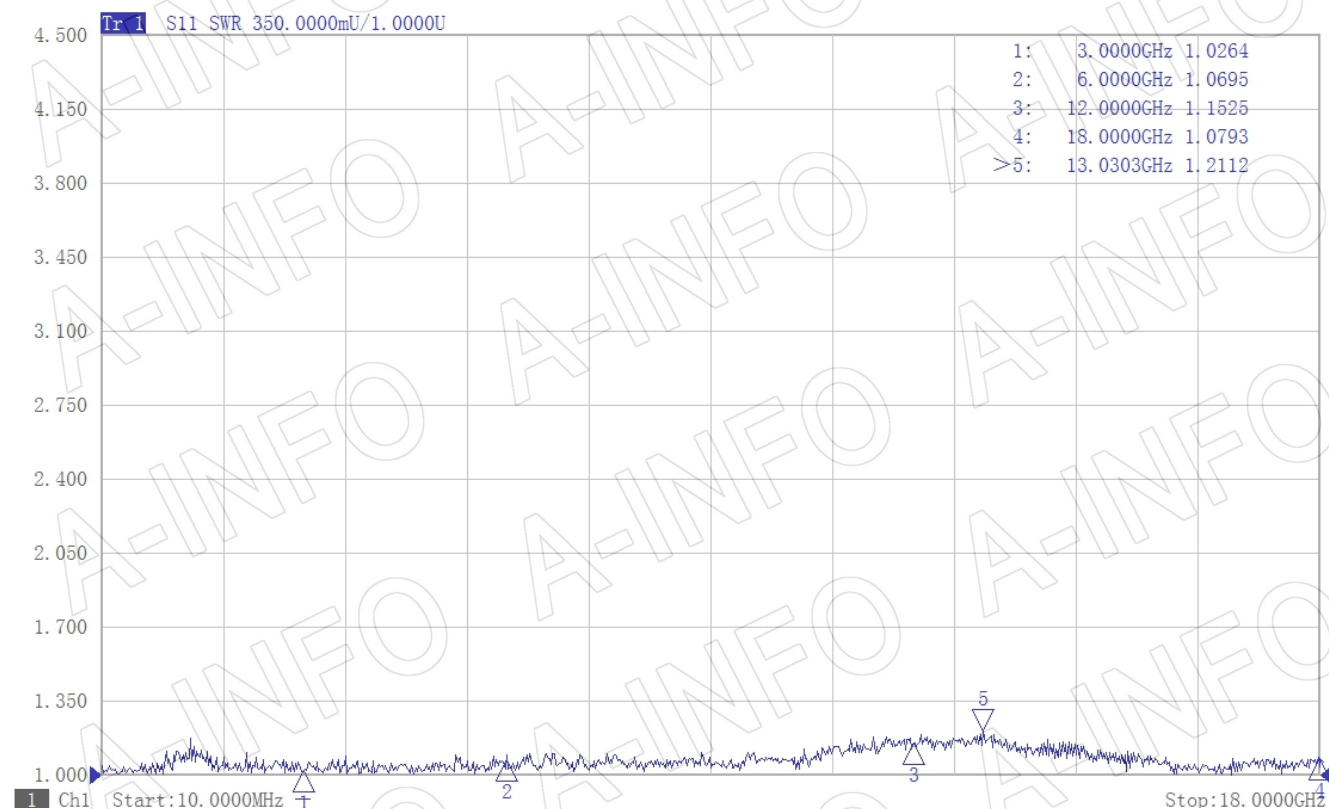

VSWR2

