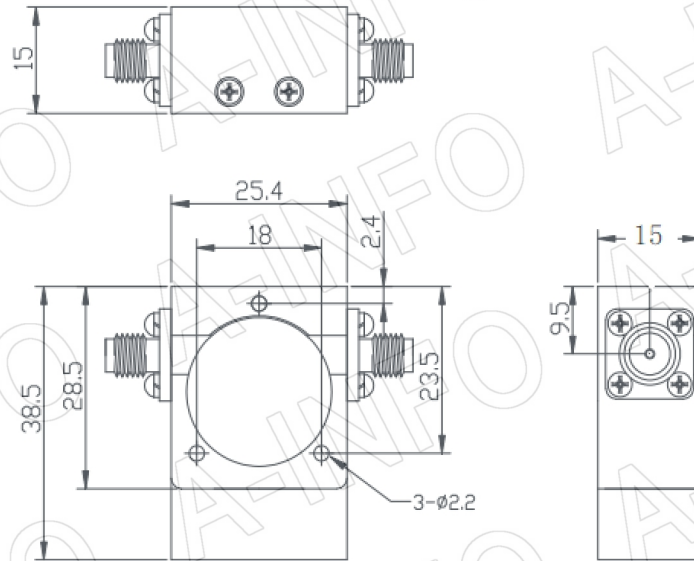


Outline Drawing (Size: mm)**Others tolerance: $\pm 0.3\text{mm}$** **Technical Specification**

Freq. Range	2-2.3GHz
VSWR	1.2 Max.
Insertion Loss	0.4dB Max.
Isolation	23dB Min.
Forward Power	100W
Reverse Power	50W
Direction	Clockwise
Connector	SMA-Female
Operating Temp.	-10°C~+70°C

Test Results Table

S/N	Insertion Loss(dB)	Isolation(dB)	VSWR
008738	0.32	27.58	1.08