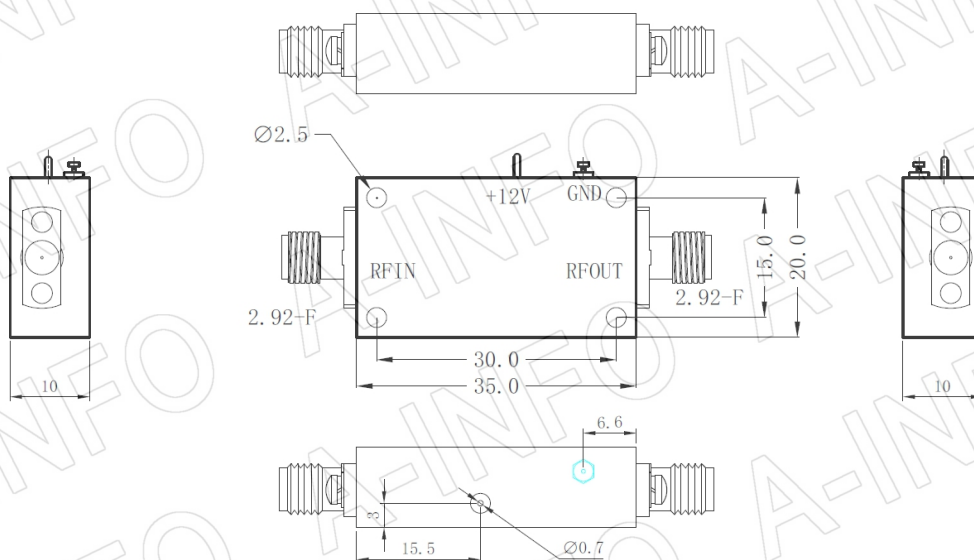


Outline Drawing (Size: mm)

Tolerance: $\pm 1\text{mm}$ 

Technical Specification

Freq. Range	18-26.5GHz
Gain	25dB Min. ; 34dB Max.
Noise Figure	3dB Max.
Pout@1dB	+10dBm Min.
Flatness	$\pm 2.5\text{dB}$ Max.
VSWR	2:1 Max.
Voltage	DC12V
Connector	2.92mm-Female
Operating Temp.	-40°C~+70°C

Test Results

S/N	Gain(dB)		Flatness (dB)	VSWR	Noise Figure (dB)	Pout@1dB
	Min.	Max.				
000743	25.97	26.74	± 0.77	1.66	2.8	13