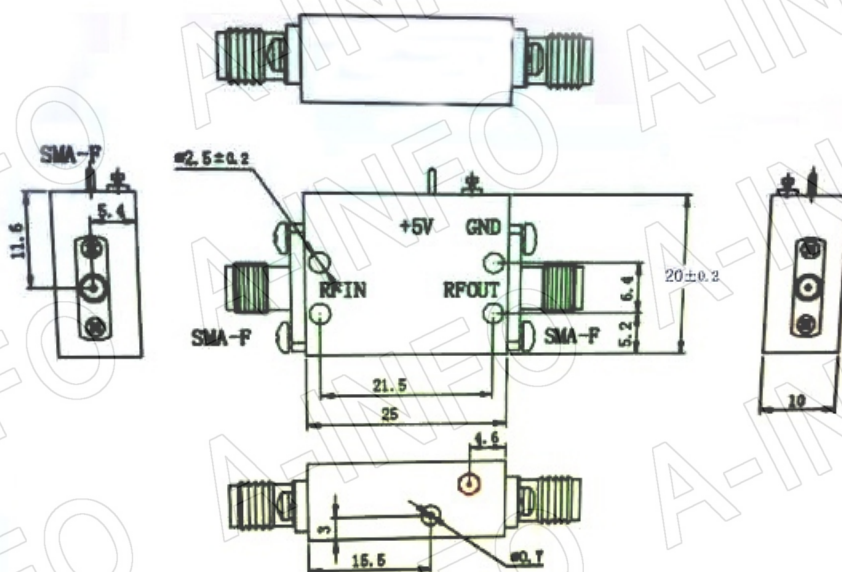


Outline Drawing (Size: mm)

Tolerance: $\pm 1\text{mm}$ 

Technical Specification

Freq. Range	10.7-12.75GHz
Gain	30dB Min.
Flatness	$\pm 1\text{dB}$ Max.
Noise Figure	2dB Max.
VSWR	2:1 Max.
Pout@1dB	+0dBm Min.
Power Supply	5V
Connector	SMA-Female
Operating Temp.	-40°C~+70°C

Test Results

S/N	Gain(dB)	Flatness(dB)	VSWR	Noise Figure(dB)	Current(mA)
000507	33.98~34.74	<+/-1.0	1.74	<2.0	80