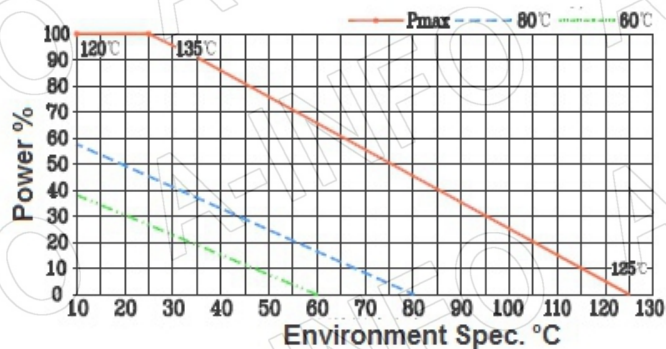
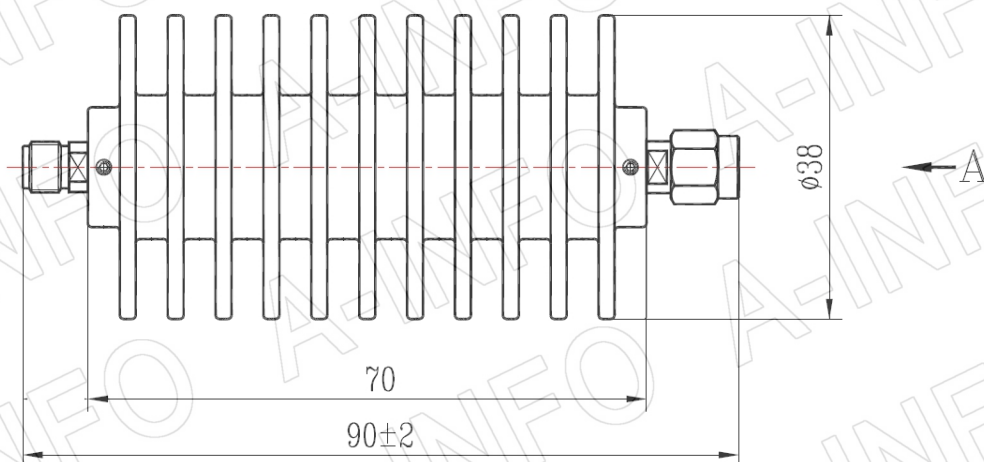


## Outline Drawing (Size: mm)

Tolerance:  $\pm 1\text{mm}$ 

## Technical Specification

|             |                                                            |
|-------------|------------------------------------------------------------|
| Power       | 50W CW Max. @+25°C                                         |
| Peak Power  | 500W Max.<br>(Duty Cycle: 5% Max. ; Pulse Width: 5μs Max.) |
| Attenuation | 20dB                                                       |
| Accuracy    | $\pm 1\text{dB}$ Max.                                      |
| Freq. Range | DC-18GHz                                                   |
| Resistance  | 50ohm                                                      |
| VSWR        | 1.35 Max.                                                  |
| Connector   | SMA-Male/SMA-Female                                        |

## Test Results Table

| S/N    | VSWR | Attenuation(dB) |
|--------|------|-----------------|
| 002620 | 1.18 | 19.81           |