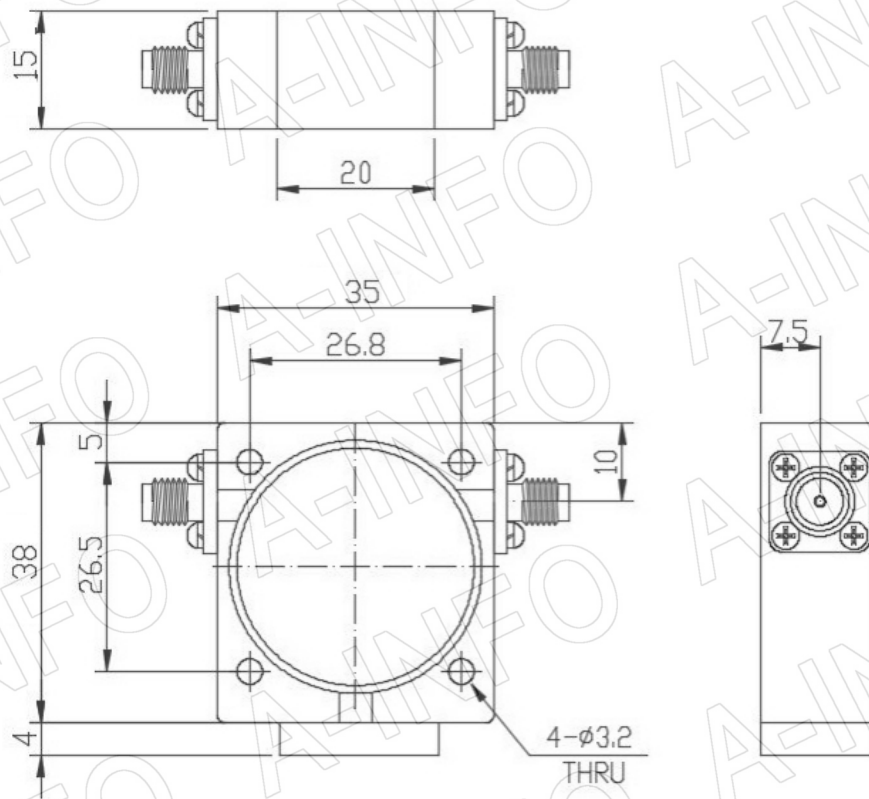


Outline Drawing (Size: mm)Others tolerance: $\pm 0.5\text{mm}$ **Technical Specification**

Freq. Range	360-410MHz
VSWR	1.35 Max.
Insertion Loss	0.6dB Max.
Isolation	17dB Min.
Forward Power	30W
Reverse Power	10W
Direction	Clockwise
Connector	SMA-Female
Operating Temp.	-40°C~+70°C

Test Results Table

S/N	Insertion Loss(dB)	Isolation(dB)	VSWR
008143	0.46	25.07	1.17