


For reference only. See data sheet for the detailed specifications.

Technical Specification


Frequency Range	DC-26.5GHz
Insertion Loss	6.77dB Typ. ; 7.45dB Max.
VSWR	1.30:1 Typ. ; 1.40:1 Max.
Phase Stability	±10deg
Amplitude Stability	±0.25dB
Impedance	50Ohm
Connector	SMA-Male/SMA-Male
Connector Body Material	Passivated Stainless Steel
Operating Temp.	-40~+85°C
Storage Temp.	-40~+85°C
Length	5000mm Approx.
Outer Diameter	5.1mm
Minimum Bending Radius	50mm

Test Results


Phase Stability & Amplitude Stability

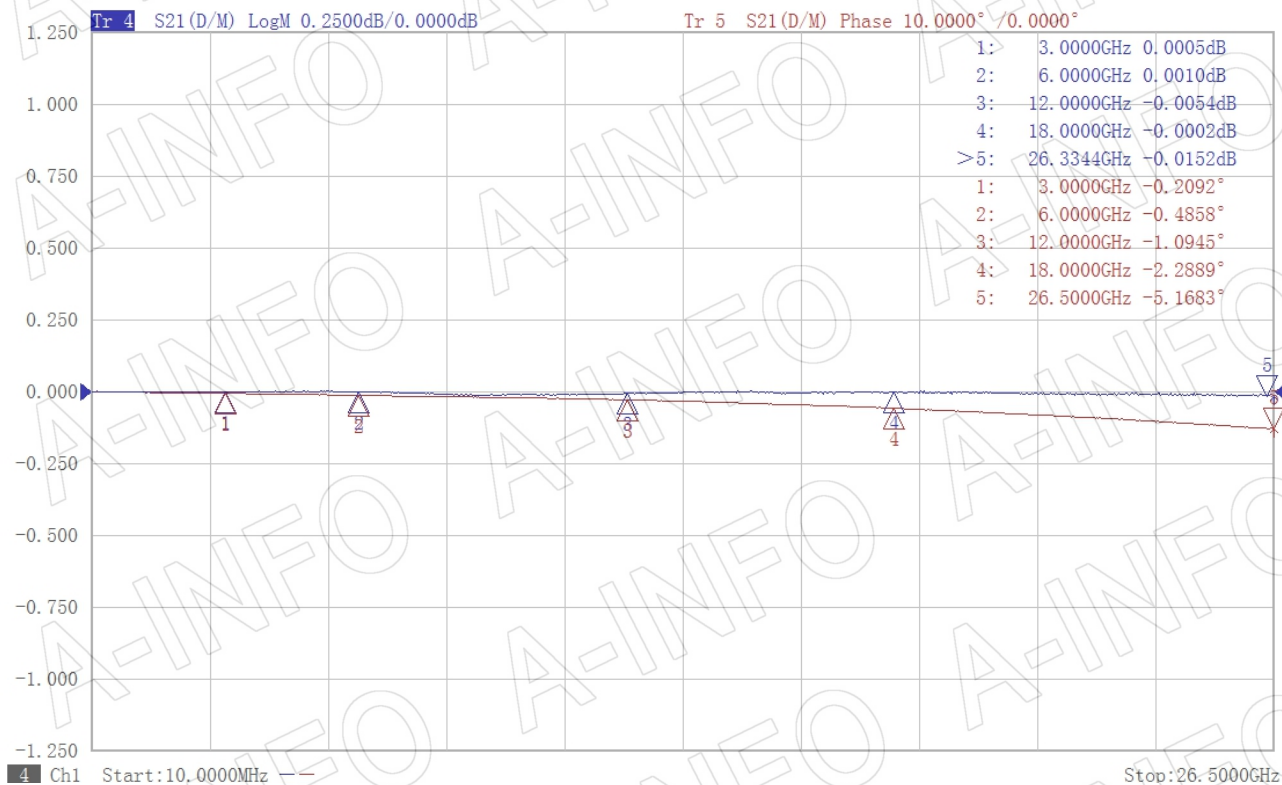

Insertion Loss

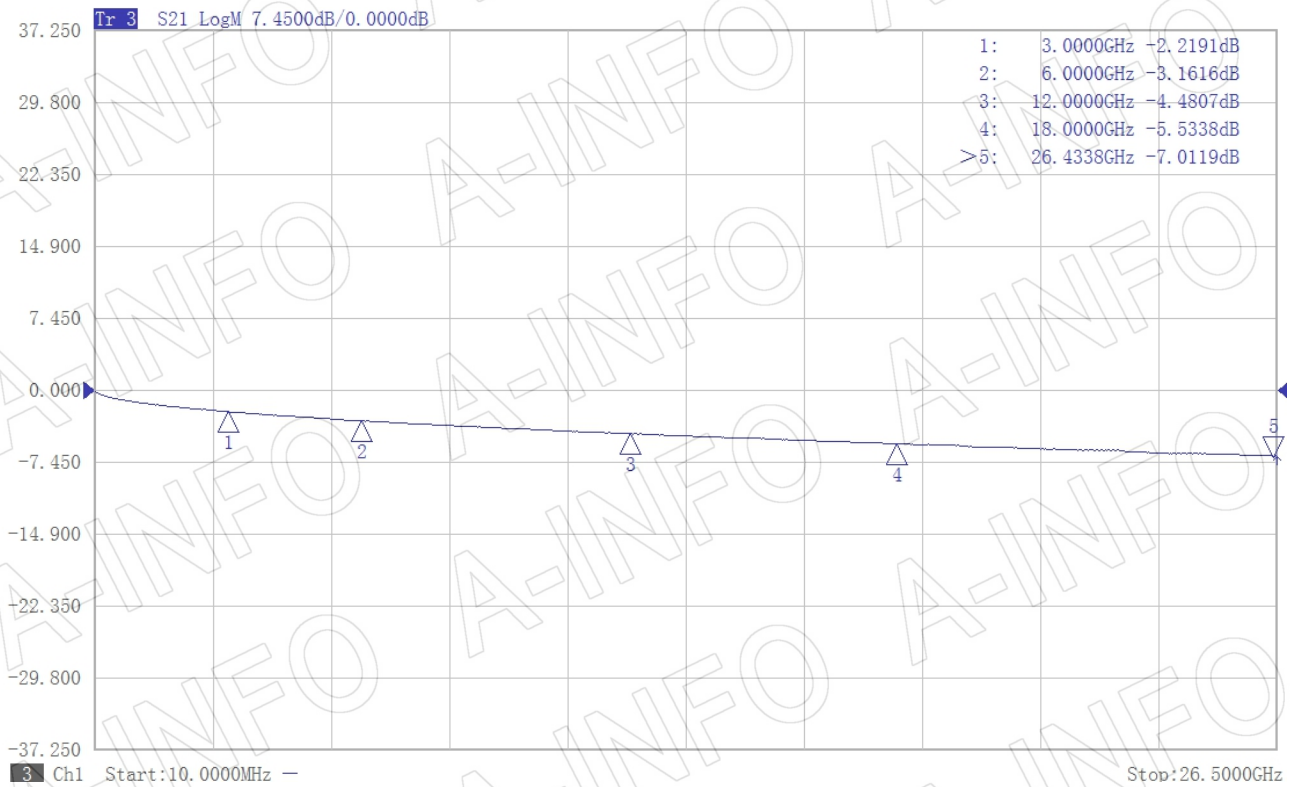

VSWR1

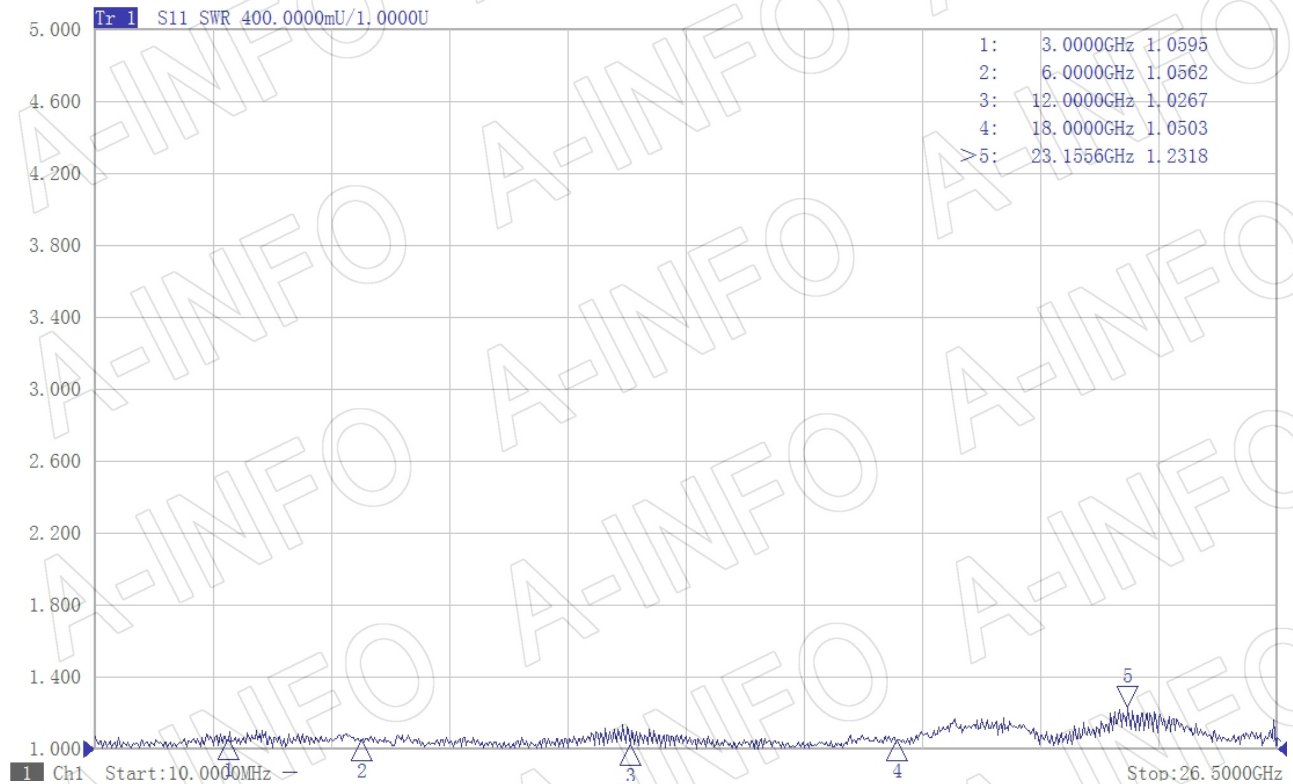

VSWR2

