


Outline Drawing (Size: mm)

Tolerance: $\pm 0.5\text{mm}$

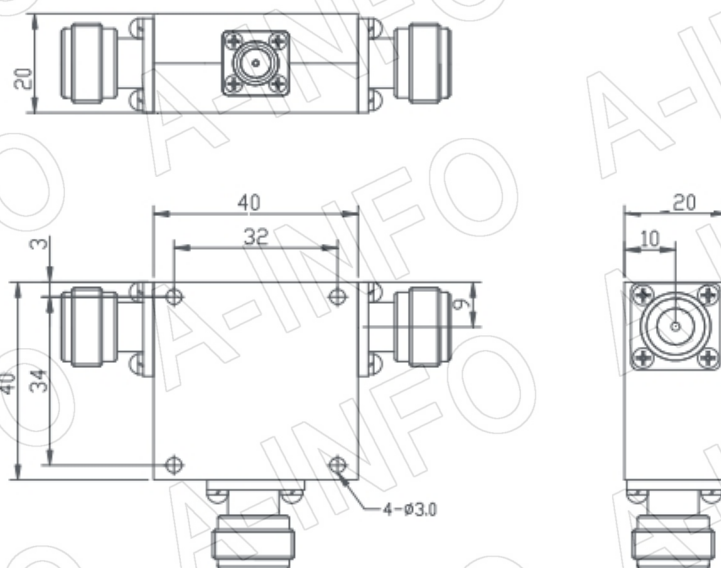

Technical Specification

Freq. Range	1.7-2.5GHz
VSWR	1.35Max.
Insertion Loss	0.6dB Max.
Isolation	17dB Min.
Power Handling	150W Max.
Direction	Clockwise
Connector	N-Female
Operating Temp.	0°C~+60°C

Note: Need to take into account the heat dissipation problem when using the product. Need to be placed on the backpanel (PCB) with cooling function.

Test Results

S/N	Port	Insertion Loss(dB)	Isolation(dB)	VSWR
001565	1-2	0.35	19.76	1.25
	2-3	0.40	18.94	1.19
	3-1	0.38	21.04	1.27