






For reference only. See data sheet for the detailed specifications.

Technical Specification



EIA WR	WR284
Frequency Range(GHz)	2.60 – 3.95
Insertion Loss(dB)	0.1 Max.
VSWR	1.05:1 Max.
Flange	FDP32(UDR32)
Material	Al
Length(mm)	70
Net Weight(Kg)	0.32 Around

Outline Drawing (Size: mm)

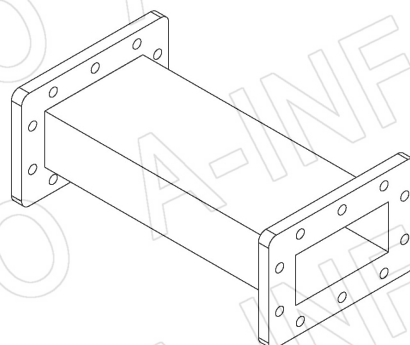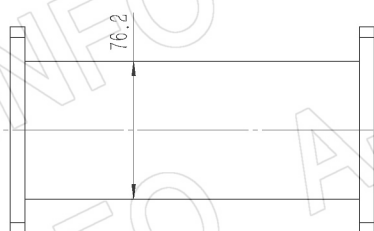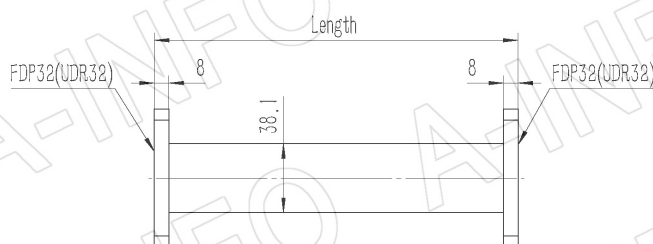

Technical drawing of a mechanical part, showing a front view (top) and a top view (bottom).

Front View (Top):

- Overall width: 76.2
- Overall height: 8
- Internal width: 59.14
- Internal height: 29.36
- Corner radius: 4xR6


Top View (Bottom):

- Overall width: 72.14
- Overall height: 97.22
- Internal width: 34.04
- Internal height: 65.08
- Corner radius: 10xR6.35
- 8 holes (4xR6.35) arranged in a rectangular pattern.

FDP32

Test Results

Insertion Loss

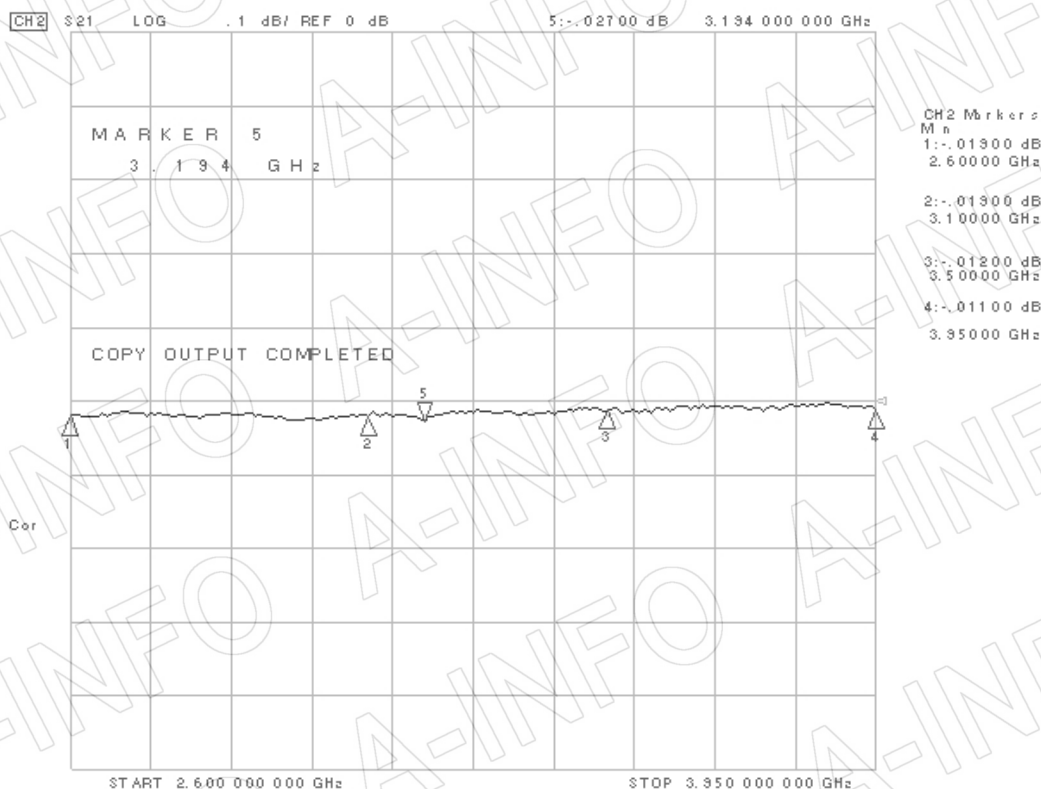

VSWR

