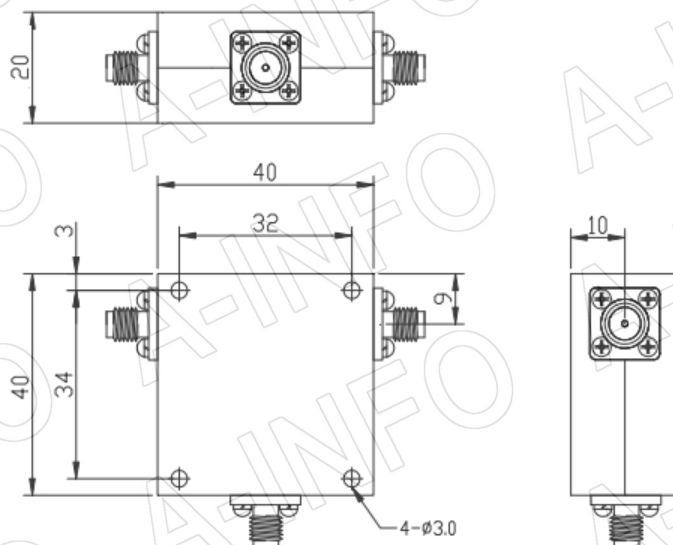


Outline Drawing (Size: mm)**Tolerance: $\pm 0.5\text{mm}$** **Technical Specification**

Freq. Range	1.7-2.5GHz
VSWR	1.35 Max.
Insertion Loss	0.6dB Max.
Isolation	17dB Min.
Power Handling	150W Max.
Direction	Clockwise
Connector	SMA-Female
Operating Temp.	0 C~+60 C

Note: Need to take into account the heat dissipation problem when using the product. Need to be placed on the backpanel (PCB) with cooling function.

Test Results

S/N	Port	Insertion Loss(dB)	Isolation(dB)	VSWR
001596	1-2	0.35	19.49	1.28
	2-3	0.38	18.94	1.21
	3-1	0.37	21.85	1.26