


Outline Drawing (Size: mm)

Tolerance: $\pm 0.5\text{mm}$

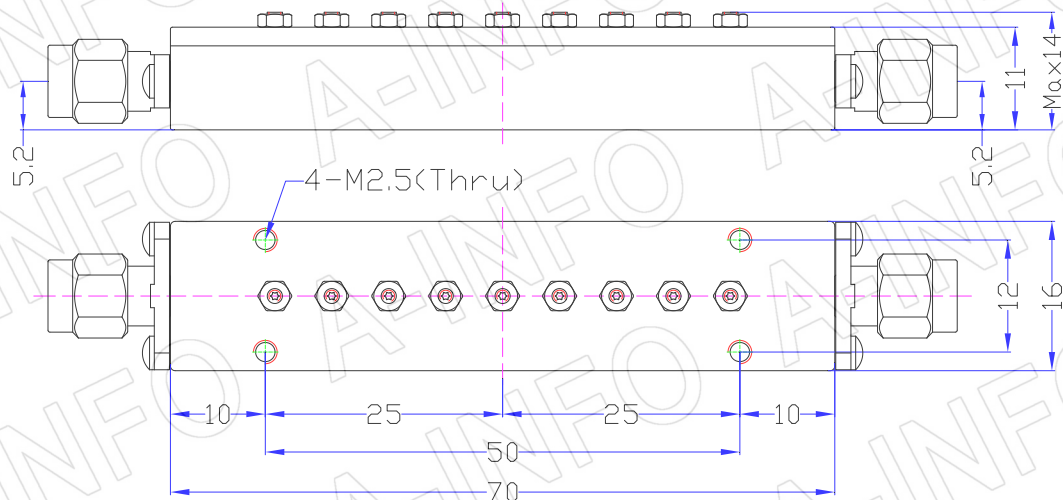

Technical Specification

Center Freq.	5.655GHz
Pass Band	5.645-5.665GHz
Insertion Loss	2.5dB Max.
Rejection	40dB Min. @ DC-5.575GHz
	40dB Min. @ 5.735-12GHz
VSWR	1.25:1 Max.
Power Handling	5.0W Max.
Connector	SMA-Male
Operating Temp.	-30°C~+70°C

Test Results

S/N	Insertion Loss(dB)	Rejection(dB)		VSWR
		@ DC-5.575GHz	@ 5.735-12GHz	
005112	2.12	52.79	52.47	1.17