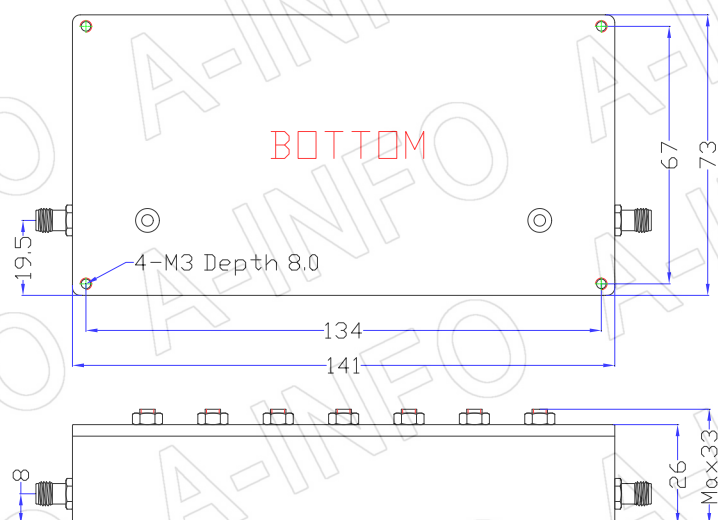


Outline Drawing (Size: mm)

Tolerance: $\pm 0.5\text{mm}$ 

Technical Specification

Center Freq.	2585MHz
Pass Band	2575-2595MHz
Insertion Loss	2dB Max.
VSWR	1.25 Max.
Rejection	15dB Min.@ DC-2570MHz
	15dB Min. @ 2600-6000MHz
Power Handling	20W Max.
Connector	SMA-Female
Operating Temp.	-30°C ~ +70°C

Test Result

S/N	Insertion Loss(dB)	VSWR	Rejection(dB)	
			@ DC-2570MHz	@ 2600-6000MHz
005062	1.49	1.12	27.91	40.34