



For reference only. See data sheet for the detailed specifications.

Technical Specification

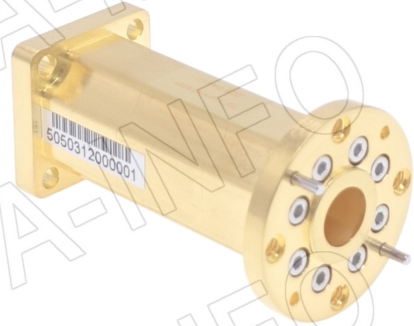


Waveguide	WR42
Frequency Range(GHz)	26.0 – 26.5
Circular WG Dia.(mm)	8.0
Length (mm/inch)	50.8/2
Insertion Loss(dB)	0.1 Max.
VSWR	1.10:1 Max.
Circular Waveguide Flange	UG-381/U-M
Rectangular Waveguide Flange	FBP220(UBR220)
Material	Cu
Finish	Gold Plated
Size(mm)	50.8 x 28.6 x 28.6
Net Weight(Kg)	0.11 Around



Outline Drawing (Size: mm)

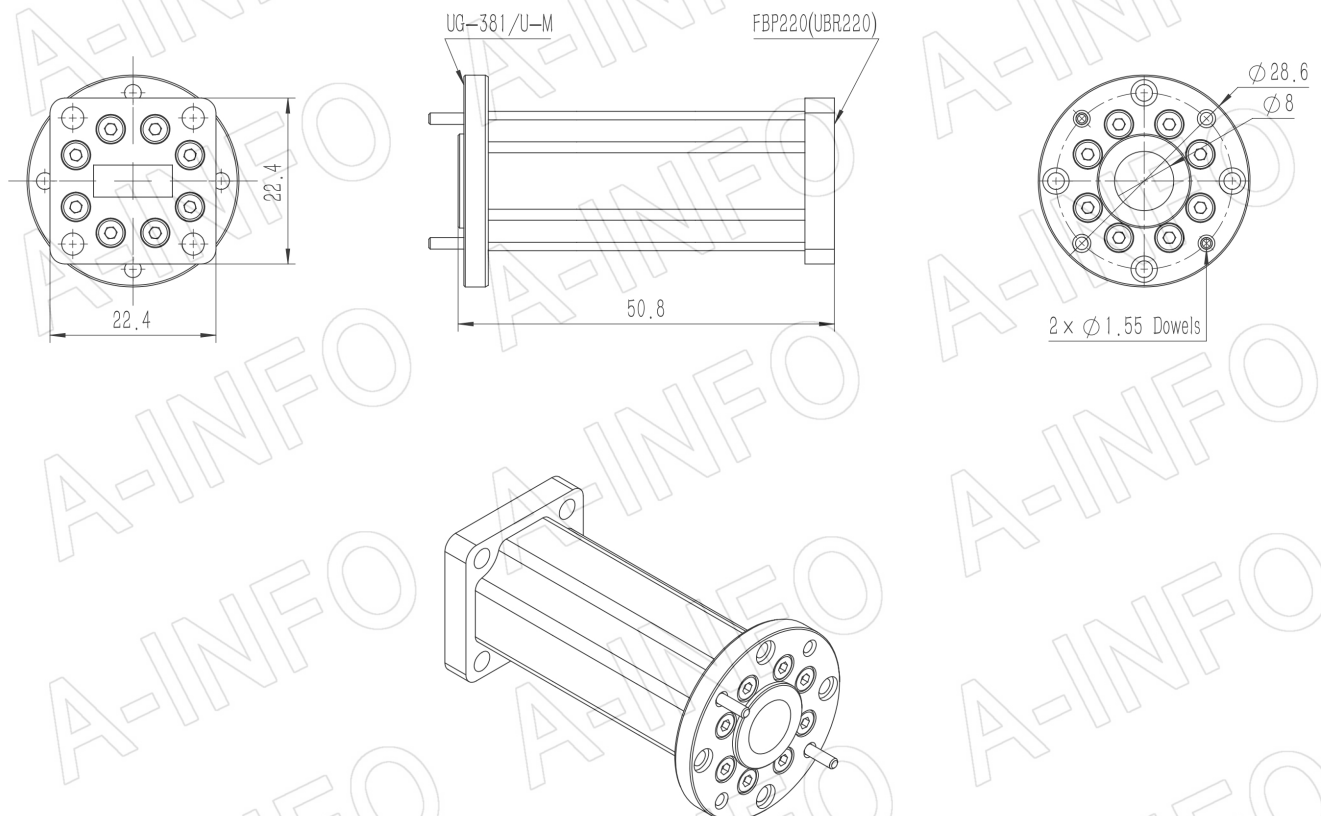

Flange Outline Drawing (Size: mm)

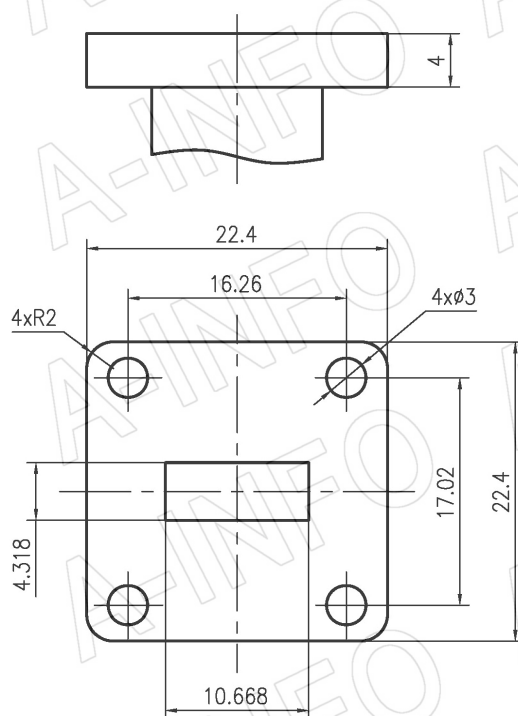


FBP220

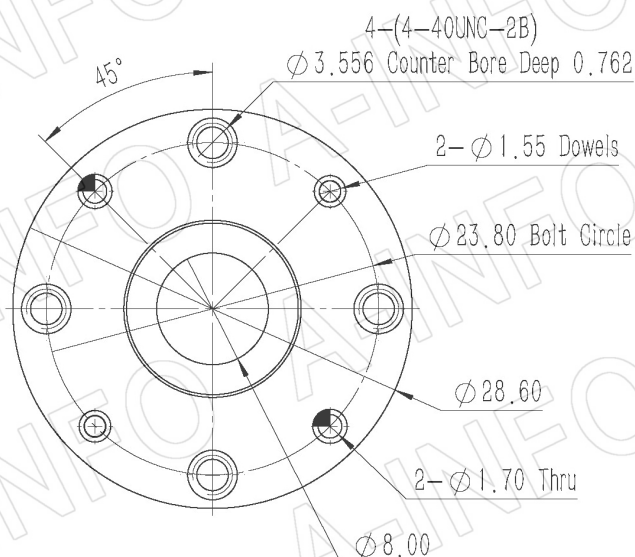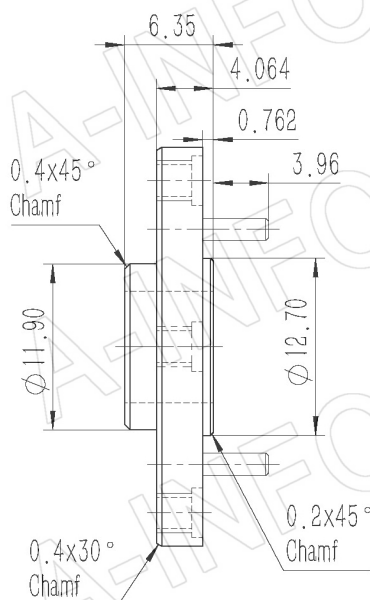

UG-381/U-M

Test Result

I.L. (Test with two transitions back to back)

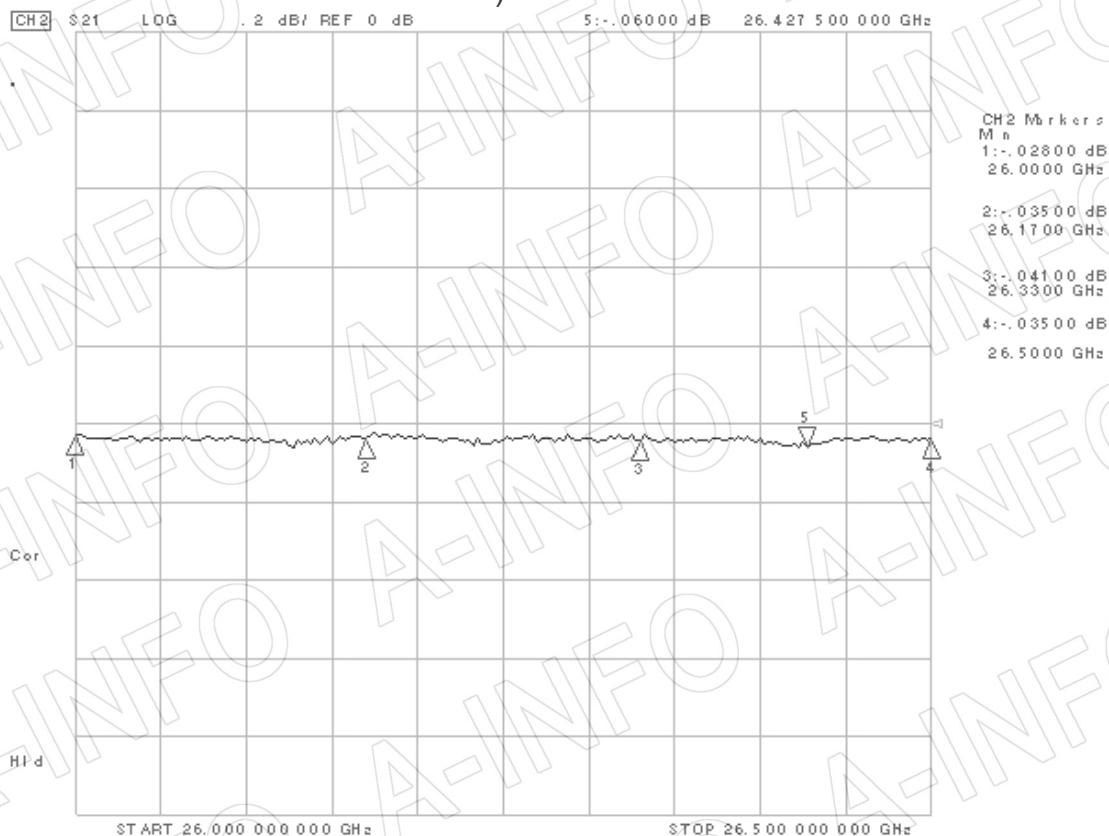

VSWR

