


For reference only. See data sheet for the detailed specifications.

Technical Specification

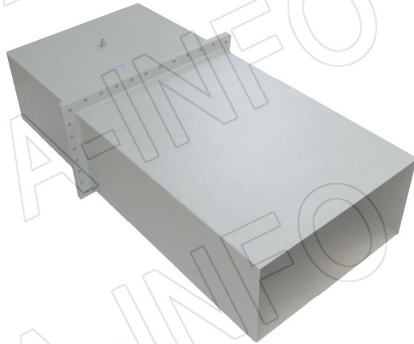


Frequency Range(GHz)	0.32 - 0.49
Waveguide	WR2300
Gain(dBi)	5 Typ.
Polarization	Linear
3dB Beamwidth(deg)	E Plane: 98 Typ.
	H Plane: 63 Typ.
Cross Pol. Isolation(dB)	30 Typ.
VSWR	2.0:1 Typ.
Output	N-Female or SMA-Female or 7/16-Female
Material	Al
Finish	Chemical Conversion Coating, Gray Paint
Size(mm)	676.3 x 384 x 1344.8
Net Weight(Kg)	27.50 Around

Outline Drawing (Size: mm)


N-Female Output (P/N: 2300EWGN)

For SMA-Female or 7/16-Female output outline drawing, please contact A-INFO.

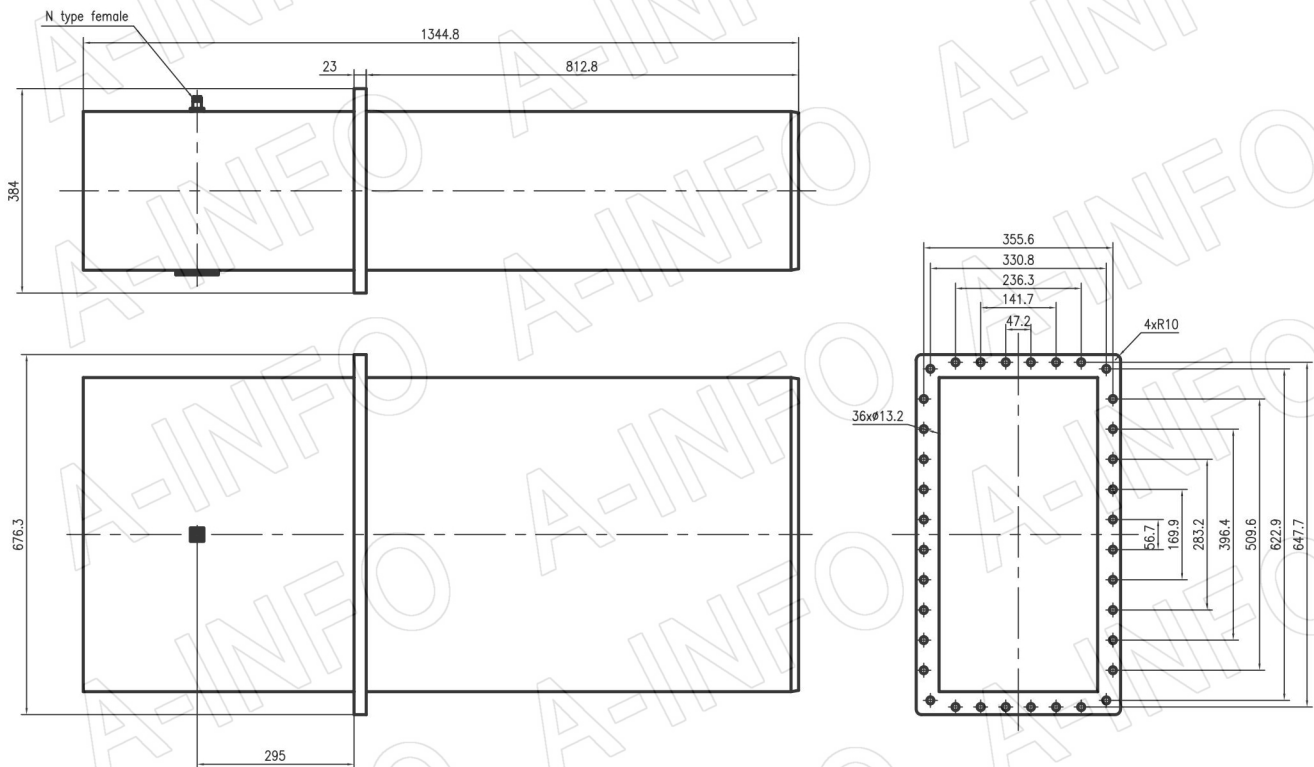

Test Results

VSWR

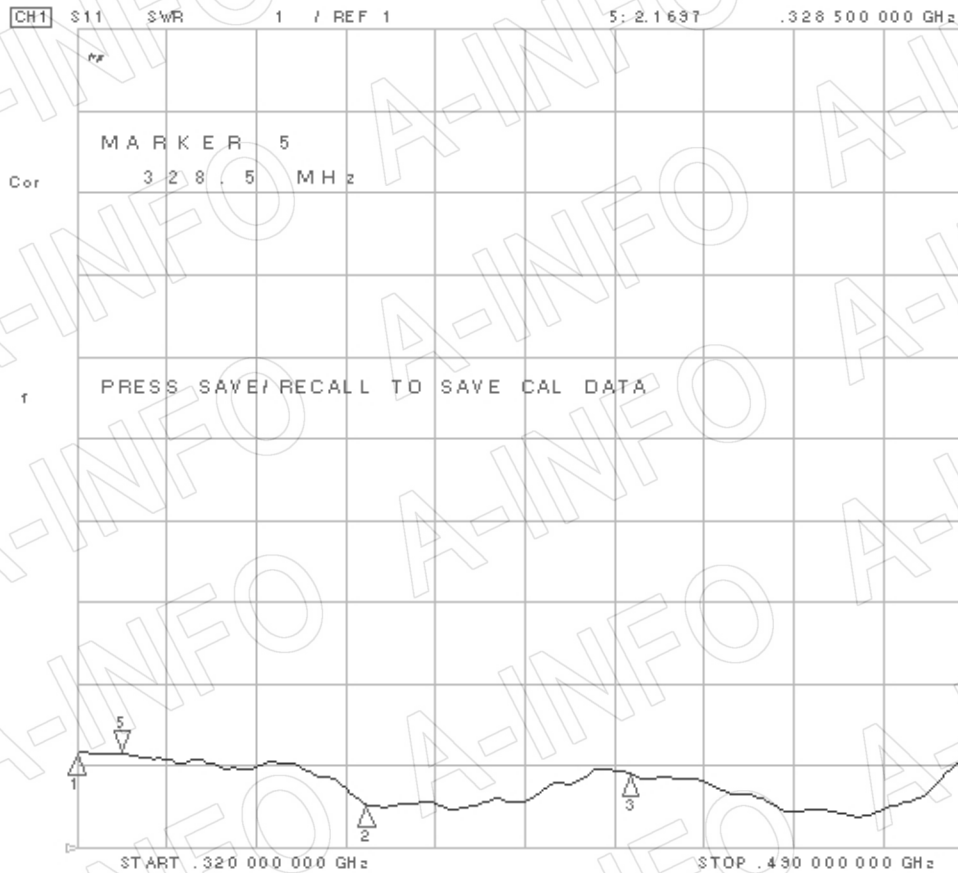

CH1 Markers
Max
1: 2.1511
320.000 MHz
2: 1.5260
375.000 MHz
3: 1.3058
425.000 MHz
4: 2.0336
490.000 MHz