



For reference only. See data sheet for the detailed specifications.

Technical Specification

430EWGEN



430EWGEN-A1





Frequency Range(GHz)	1.7 - 2.6
Waveguide	WR430
Gain(dBi)	5 Typ.
Polarization	Linear
3dB Beamwidth(deg)	E Plane: 98 Typ.
	H Plane: 67 Typ.
Cross Pol. Isolation(dB)	30 Typ.
VSWR	2.0:1 Typ.
Connector	Endlaunch N-Female or Endlaunch SMA-Female
Material	Al
Finish	Chemical Conversion Coating, Gray Paint
Size(mm)	430EWGEx: 161 x 106.4 x 698.1
	430EWGEx-A1: 600 x 600 x 698.1
Net Weight(Kg)	430EWGEx: 1.9 Around
	430EWGEx-A1: 8.7 Around

Outline Drawing (Size: mm)

Endlaunch N-Female Output (P/N: 430EWGEN)

For Endlaunch SMA-Female output outline drawing, please contact A-INFO.

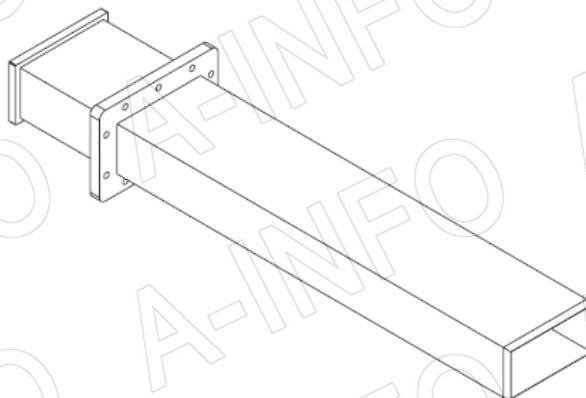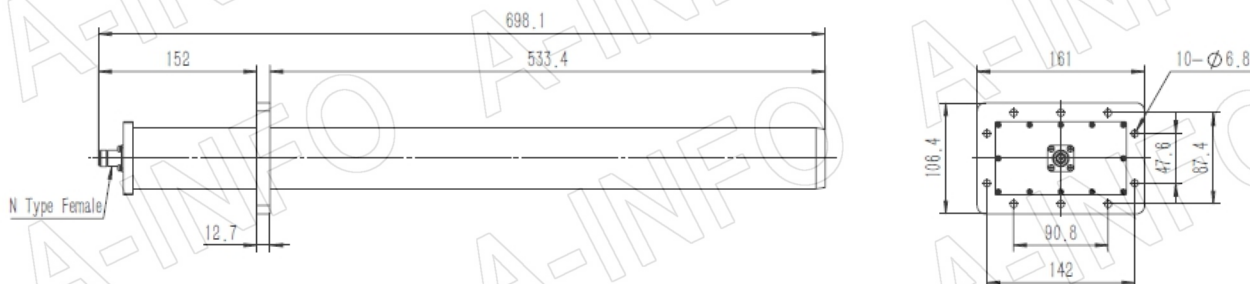

AINFO Inc.

China(Beijing):
China(Chengdu):
USA :

Tel: (+86) 10-6266-7326,
Tel: (+86) 28-8519-2786,
Tel: (+1) 949-639-9688,

(+86) 10-6266-7327
(+86) 28-8519-3044
(+1) 949-639-9608


Page 1 of 3

Fax: (+86) 10-6266-7379
Fax: (+86) 28-8519-3068
Fax: (+1) 949-639-9670

Website: www.ainfoinc.com
Email: sales@ainfoinc.com


Endlaunch N-Female Output, Equipped with Absorber (Option, P/N: 430EWGEN-A1)

For Endlaunch SMA-Female output outline drawing, please contact A-INFO.

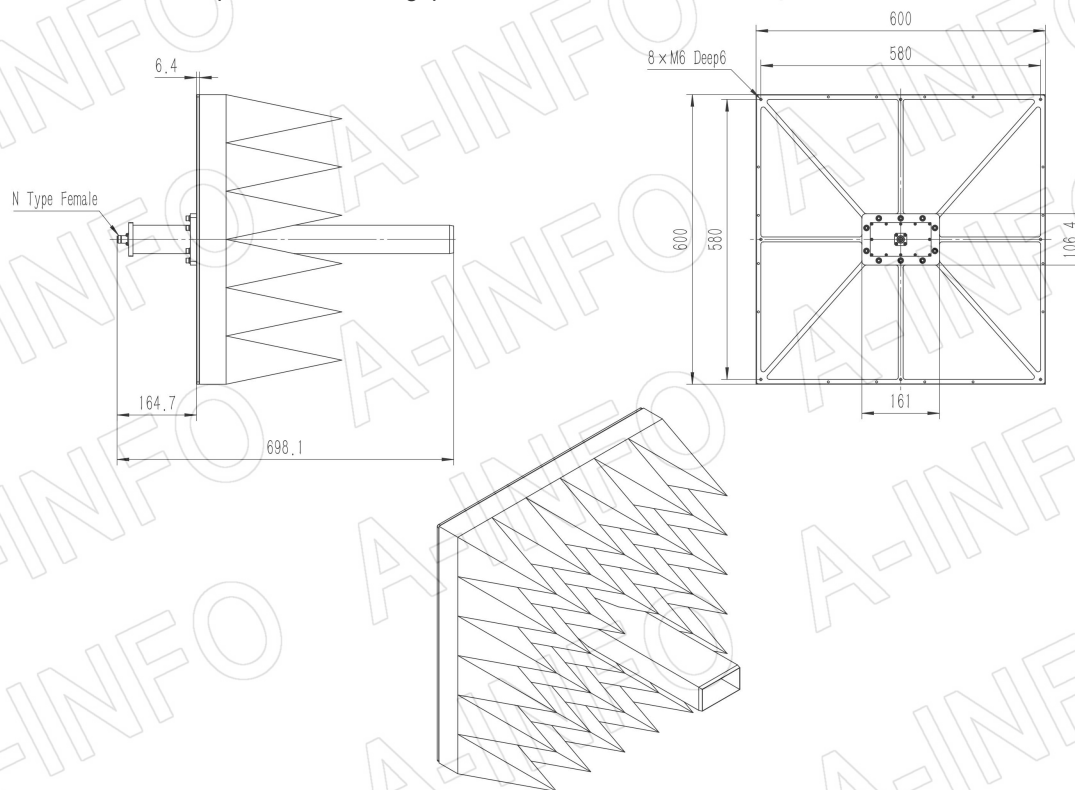

Endlaunch N-Female Output with Round Mounting Bracket & Equipped with Absorber (Option, P/N: EWG-MB50 & 430EWGEN-A1)

For Endlaunch SMA-Female output outline drawing, please contact A-INFO.

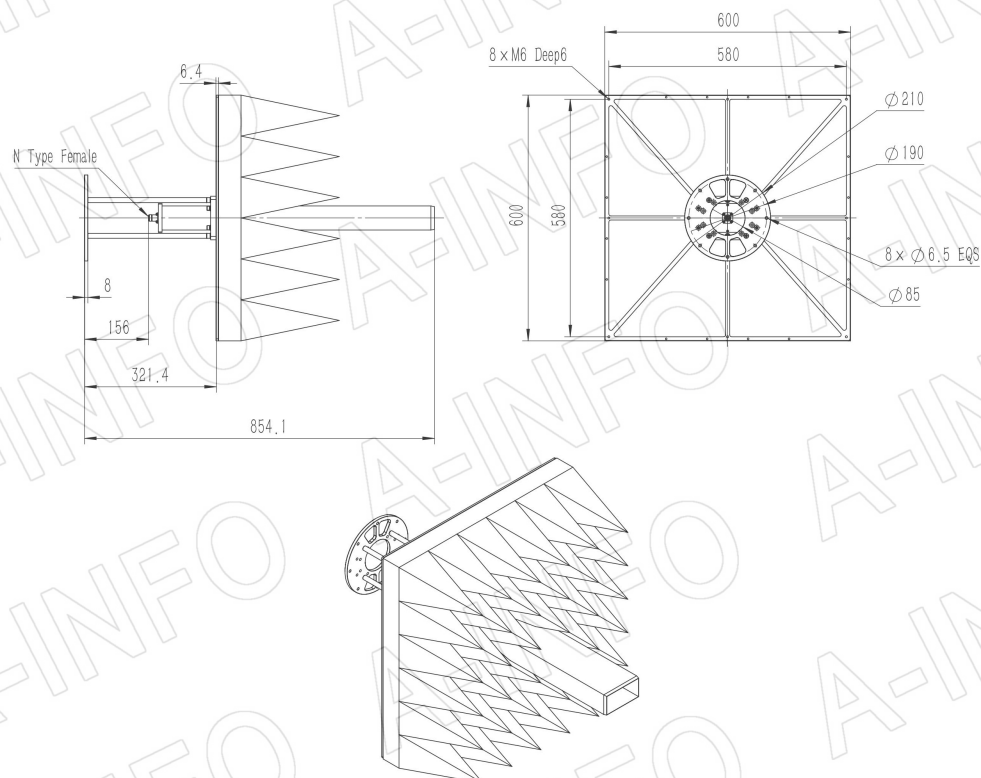

Test Results

VSWR

